




IEI Technology Corp.

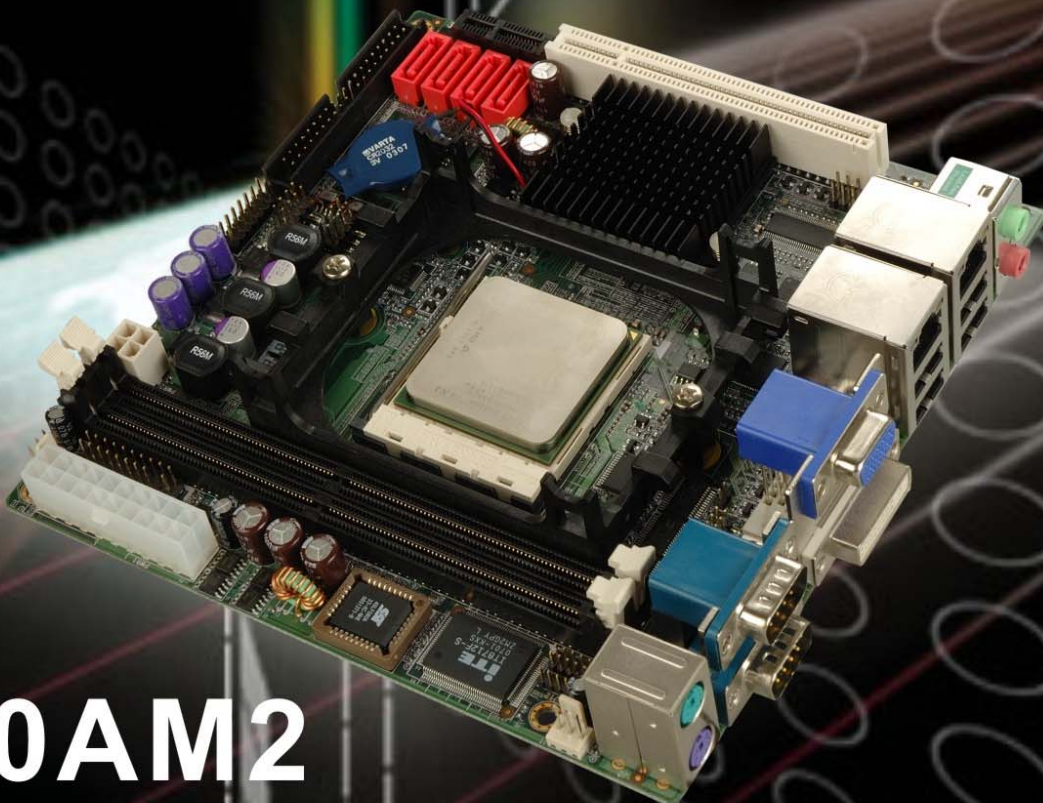

# MODEL: **KINO-690AM2**

**Mini-ITX Motherboard with Embedded AMD® Athlon 64,  
Athlon 64 X2, Sempron CPU with VGA/DVI, USB 2.0,  
Dual PCIe GbE, SATA II and Audio**

## **User Manual**

Rev. 1.01 January 2008



# Revision

Date	Version	Changes
2008-01	1.01	Modified the pinouts of the internal USB connectors (JUSB1 and JUSB2)
2007-08	1.00	Initial release

# Copyright

---

## **COPYRIGHT NOTICE**

The information in this document is subject to change without prior notice in order to improve reliability, design and function and does not represent a commitment on the part of the manufacturer.

In no event will the manufacturer be liable for direct, indirect, special, incidental, or consequential damages arising out of the use or inability to use the product or documentation, even if advised of the possibility of such damages.

This document contains proprietary information protected by copyright. All rights are reserved. No part of this manual may be reproduced by any mechanical, electronic, or other means in any form without prior written permission of the manufacturer.

## **TRADEMARKS**

All registered trademarks and product names mentioned herein are used for identification purposes only and may be trademarks and/or registered trademarks of their respective owners.

# Manual Conventions

---



## **WARNING!**

Warnings appear where overlooked details may cause damage to the equipment or result in personal injury. Warnings should be taken seriously. Warnings are easy to recognize. The word “warning” is written as “**WARNING**,” both capitalized and bold and is followed by text. The text is the warning message. A warning message is shown below:

---



## **WARNING:**

This is an example of a warning message. Failure to adhere to warning messages may result in permanent damage to the KINO-690AM2 or personal injury to the user. Please take warning messages seriously.

---



## **CAUTION!**

Cautionary messages should also be heeded to help reduce the chance of losing data or damaging the KINO-690AM2. Cautions are easy to recognize. The word “caution” is written as “**CAUTION**,” both capitalized and bold and is followed. The italicized text is the cautionary message. A caution message is shown below:



## KINO-690AM2 Mini-ITX Motherboard



### CAUTION:

This is an example of a caution message. Failure to adhere to cautions messages may result in permanent damage to the KINO-690AM2. Please take caution messages seriously.



### NOTE:

These messages inform the reader of essential but non-critical information. These messages should be read carefully as any directions or instructions contained therein can help avoid making mistakes. Notes are easy to recognize. The word “note” is written as “**NOTE**,” both capitalized and bold and is followed by text. The text is the cautionary message. A note message is shown below:



### NOTE:

This is an example of a note message. Notes should always be read. Notes contain critical information about the KINO-690AM2. Please take note messages seriously.

# Packing List

**NOTE:**

If any of the components listed in the checklist below are missing, please do not proceed with the installation. Contact the IEI reseller or vendor you purchased the KINO-690AM2 from or contact an IEI sales representative directly. To contact an IEI sales representative, please send an email to [sales@iei.com.tw](mailto:sales@iei.com.tw).

The items listed below should all be included in the KINO-690AM2 package.

- 1 x KINO-690AM2 single board computer
- 1 x IDE cable
- 1 x I/O shielding
- 1 x SATA power cable
- 2 x SATA cables
- 1 x Dual RS-232 cable
- 1 x Mini jumper pack
- 1 x Utility CD
- 1 x QIG (quick installation guide)

Images of the above items are shown in **Chapter 3**.

# Table of Contents

<b>1</b>	<b>INTRODUCTION.....</b>	<b>1</b>
1.1	OVERVIEW .....	2
1.1.1	KINO-690AM2 Features.....	2
1.2	KINO-690AM2 OVERVIEW.....	2
1.2.1	KINO-690AM2 Overview Photo.....	2
1.2.2	KINO-690AM2 Peripheral Connectors and Jumpers.....	4
1.2.3	Technical Specifications.....	5
<b>2</b>	<b>DETAILED SPECIFICATIONS .....</b>	<b>9</b>
2.1	DIMENSIONS .....	10
2.1.1	Board Dimensions.....	10
2.1.2	External Interface Panel Dimensions .....	11
2.2	DATA FLOW .....	12
2.3	COMPATIBLE PROCESSORS .....	13
2.3.1	Supported Processors .....	13
2.3.2	DDR2 Memory Controller .....	13
2.3.3	Processor Electrical Interfaces.....	14
2.3.4	Processor Power Management .....	14
2.4	AMD 690G NORTHBRIDGE CHIPSET .....	14
2.4.1	PCI Express Interface .....	14
2.4.1.1	PCIe x1 Expansion.....	14
2.4.2	PCIe GbE Ethernet .....	15
2.4.3	Acceleration Features .....	16
2.4.4	Display Support .....	17
2.4.4.1	TV Out .....	17
2.4.4.2	Multiple Display Features.....	17
2.4.4.3	DVI .....	17
2.5	AMD SB600 SOUTHBRIDGE CHIPSET.....	18
2.5.1	CPU Interface .....	18
2.5.2	A-Link Xpress II interface to the Northbridge .....	18
2.5.3	PCI Host Bus Controller.....	18

2.5.4 USB Controllers .....	19
2.5.5 SMBus Controller .....	20
2.5.6 Interrupt Controller .....	20
2.5.7 DMA Controller .....	20
2.5.8 LPC host bus controller .....	21
2.5.9 SATA II AHCI Controller .....	21
2.5.10 IDE Controller .....	22
2.5.11 AC Link interface .....	23
2.5.12 Timers.....	25
2.5.13 RTC (Real Time Clock) .....	25
2.5.14 Power Management .....	25
2.6 LPC BUS COMPONENTS.....	26
2.6.1 LPC Bus Overview.....	26
2.6.2 BIOS Chipset: .....	26
2.6.3 TPM Module .....	27
2.6.4 Super I/O chipset.....	27
2.6.4.1 Super I/O LPC Interface .....	28
2.6.4.2 Super I/O 16C550 UARTs .....	28
2.6.4.3 Super I/O Enhanced Hardware Monitor .....	28
2.6.4.4 Super I/O Fan Speed Controller.....	28
2.6.4.5 Super I/O Keyboard and Mouse Controller .....	28
2.6.4.6 Super I/O Infrared .....	29
2.6.5 Serial Port Chipset.....	29
2.7 ENVIRONMENTAL AND POWER SPECIFICATIONS .....	29
2.7.1 System Monitoring .....	29
2.7.2 Operating Temperature and Temperature Control.....	30
2.7.3 Power Consumption.....	31
<b>3 UNPACKING .....</b>	<b>33</b>
3.1 ANTI-STATIC PRECAUTIONS.....	34
3.2 UNPACKING.....	34
3.2.1 Unpacking Precautions.....	34
3.3 UNPACKING CHECKLIST .....	35
3.3.1 Package Contents.....	35
3.4 OPTIONAL ITEMS.....	37



## KINO-690AM2 Mini-ITX Motherboard

<b>4</b>	<b>CONNECTOR PINOUTS .....</b>	<b>39</b>
4.1	PERIPHERAL INTERFACE CONNECTORS .....	40
4.1.1	KINO-690AM2 Layout .....	40
4.1.2	Peripheral Interface Connectors .....	41
4.1.3	External Interface Panel Connectors .....	42
4.2	INTERNAL PERIPHERAL CONNECTORS .....	42
4.2.1	ATX Power Connector .....	42
4.2.2	Digital Input/Output (DIO) Connector .....	43
4.2.3	Fan Connector .....	44
4.2.4	Front Panel Connector (14-pin) .....	45
4.2.5	IDE Connector (40-pin) .....	47
4.2.6	Infrared Interface Connector (5-pin) .....	48
4.2.7	PCI Slot .....	49
4.2.8	PCI Express x1 Slot .....	52
4.2.9	SATA Drive Connectors .....	54
4.2.10	Serial Port Connector (COM3)(RS-232, RS-422 or RS-485) .....	55
4.2.11	Serial Port Connector (COM4) .....	56
4.2.12	Power Connector .....	57
4.2.13	Trusted Platform Module (TPM) Connector .....	58
4.2.14	TV Out Connector .....	59
4.2.15	USB Connectors (Internal) .....	60
4.3	EXTERNAL PERIPHERAL INTERFACE CONNECTOR PANEL .....	62
4.3.1	Audio Connector .....	62
4.3.2	DVI and VGA Combo Connector .....	63
4.3.3	Keyboard/Mouse Connector .....	65
4.3.4	LAN and Dual USB Combo Connectors .....	66
4.3.5	Serial Port Connectors (COM1 and COM2 ) .....	67
<b>5</b>	<b>INSTALLATION .....</b>	<b>69</b>
5.1	ANTI-STATIC PRECAUTIONS .....	70
5.2	INSTALLATION CONSIDERATIONS .....	71
5.2.1	Installation Notices .....	71
5.2.2	Installation Checklist .....	72
5.3	UNPACKING .....	73
5.3.1	Unpacking Precautions .....	73

5.4 CPU, CPU COOLING KIT AND DIMM INSTALLATION .....	74
5.4.1 AMD Socket AM2 CPU Installation .....	74
5.4.2 Cooling Kit Installation .....	76
5.4.3 DIMM Installation .....	77
5.5 JUMPER SETTINGS .....	79
5.5.1 Clear CMOS Jumper.....	79
5.5.2 COM 3 Function Select Jumper.....	81
5.5.3 RS-422 Termination Jumper .....	82
5.6 CHASSIS INSTALLATION .....	83
5.6.1 Airflow.....	83
5.6.2 Motherboard Installation.....	84
5.7 INTERNAL PERIPHERAL DEVICE CONNECTIONS.....	84
5.7.1 Peripheral Device Cables .....	84
5.7.2 ATA Flat Cable Connection .....	84
5.7.3 Dual RS-232 Cable Connection.....	85
5.7.4 SATA Drive Connection .....	86
5.7.5 USB Cable (Dual Port).....	88
5.7.6 USB Cable (Four Port).....	89
5.8 EXTERNAL PERIPHERAL INTERFACE CONNECTION .....	90
5.8.1 Audio Connection.....	91
5.8.2 DVI Display Device Connection.....	91
5.8.3 LAN Connection (Single Connector) .....	92
5.8.4 PS/2 Keyboard and Mouse Connection .....	93
5.8.5 Serial Device Connection .....	94
5.8.6 USB Connection (Dual Connector) .....	95
5.8.7 VGA Monitor Connection .....	96
<b>6 BIOS SCREENS.....</b>	<b>99</b>
6.1 INTRODUCTION .....	100
6.1.1 Starting Setup.....	100
6.1.2 Using Setup .....	100
6.1.3 Getting Help.....	101
6.1.4 Unable to Reboot After Configuration Changes.....	101
6.1.5 BIOS Menu Bar.....	101
6.2 MAIN .....	102

## KINO-690AM2 Mini-ITX Motherboard

6.3	ADVANCED .....	103
6.3.1	CPU Configuration .....	104
6.3.2	IDE Configuration .....	106
6.3.2.1	IDE Master, IDE Slave .....	107
6.3.3	Super IO Configuration .....	113
6.3.4	Hardware Health Configuration .....	116
6.3.5	ACPI Configuration .....	118
6.3.6	Trusted Computing .....	119
6.3.7	Remote Access Configuration .....	120
6.3.8	USB Configuration .....	124
6.4	PCI/PNP .....	126
6.5	BOOT .....	132
6.5.1	Boot Settings Configuration .....	132
6.6	SECURITY .....	135
6.7	CHIPSET .....	136
6.7.1	NorthBridge Chipset Configuration .....	137
6.7.2	ECC Configuration .....	139
6.7.3	Internal Graphics Configuration .....	141
6.7.4	SouthBridge Configuration .....	143
6.8	POWER .....	146
6.9	EXIT .....	148
<b>7</b>	<b>SOFTWARE DRIVERS .....</b>	<b>151</b>
7.1	AVAILABLE SOFTWARE DRIVERS .....	152
7.2	DRIVER CD AUTO-RUN .....	152
7.3	AMD 690G CHIPSET DRIVER INSTALLATION .....	154
7.4	BROADCOM LAN DRIVER (FOR GBE LAN) INSTALLATION .....	159
7.5	REALTEK AC`97 AUDIO DRIVER (ALC655) INSTALLATION .....	164
7.5.1	BIOS Setup .....	164
7.5.2	Driver Installation .....	164
7.6	WEBPAM RAID UTILITY DRIVER INSTALLATION .....	169
<b>A</b>	<b>BIOS OPTIONS .....</b>	<b>175</b>
<b>B</b>	<b>DIO INTERFACE .....</b>	<b>179</b>
B.1	DIO INTERFACE INTRODUCTION .....	180

B.2 DIO CONNECTOR PINOUTS .....	180
B.3 ASSEMBLY LANGUAGE SAMPLES.....	181
<i>B.3.1 Enable the DIO Input Function.....</i>	<i>181</i>
<i>B.3.2 Enable the DIO Output Function .....</i>	<i>181</i>
<b>C WATCHDOG TIMER .....</b>	<b>183</b>
<b>D ADDRESS MAPPING.....</b>	<b>187</b>
D.1 ADDRESS MAP .....	188
D.2 1ST MB MEMORY ADDRESS MAP .....	188
D.3 IRQ MAPPING TABLE.....	189
D.4 DMA CHANNEL ASSIGNMENTS.....	189
<b>E HAZARDOUS MATERIALS DISCLOSURE .....</b>	<b>191</b>
E.1 HAZARDOUS MATERIAL DISCLOSURE TABLE FOR IPB PRODUCTS CERTIFIED AS ROHS COMPLIANT UNDER 2002/95/EC WITHOUT MERCURY.....	192
<b>F RAID SETUP .....</b>	<b>195</b>
F.1 INTRODUCTION .....	196
<i>F.1.1 Precautions .....</i>	<i>196</i>
F.2 FEATURES AND BENEFITS .....	197
F.3 ACCESSING THE AMD SB600 RAID UTILITY .....	197
<b>G INDEX.....</b>	<b>201</b>



# List of Figures

Figure 1-1: KINO-690AM2 Overview [Front View] .....	3
Figure 1-2: External Peripheral Interface Connectors .....	4
Figure 2-1: KINO-690AM2 Dimensions (mm) .....	10
Figure 2-2: External Interface Panel Dimensions (mm) .....	11
Figure 2-3: Data Flow Block Diagram .....	12
Figure 2-4: DIMM Sockets .....	14
Figure 2-5: PCIe x1 Expansion Slot .....	15
Figure 2-6: Broadcom PCI GbE Controllers .....	15
Figure 2-7: PCI Expansion Slot .....	19
Figure 2-8: USB Connectors .....	20
Figure 2-9: SATA Connectors .....	22
Figure 2-10: IDE Connector .....	23
Figure 2-11: Audio Codec and Audio Jacks .....	24
Figure 2-12: LPC BUS Components .....	26
Figure 4-1: Connector and Jumper Locations .....	40
Figure 4-2: ATX Power Connector Pinout Locations .....	43
Figure 4-3: DIO Connector Connector Locations .....	44
Figure 4-4: Fan Connector Location .....	45
Figure 4-5: Front Panel Connector Pinout Locations (14-pin) .....	46
Figure 4-6: IDE Device Connector Locations .....	47
Figure 4-7: Infrared Connector Pinout Locations .....	48
Figure 4-8: PCI Slot Location .....	50
Figure 4-9: PCI Express x1 Slot Locations .....	53
Figure 4-10: SATA Drive Connector Locations .....	55
Figure 4-11: RS-232/422/485 Serial Port Connector Location .....	56
Figure 4-12: Serial Connector Pinout Locations .....	57
Figure 4-13: Power Connector Location .....	58
Figure 4-14: TPM Connector Pinout Locations .....	59

Figure 4-15: TV Connector Pinout Locations .....	60
Figure 4-16: USB Connector Pinout Locations .....	61
Figure 4-17: KINO-690AM2 External Peripheral Interface Connector .....	62
Figure 4-18: Audio Connector .....	63
Figure 4-19: DVI-D Connector Pinouts .....	64
Figure 4-20: VGA Connector .....	64
Figure 4-21: PS/2 Pinouts .....	65
Figure 4-22: RJ-45 Ethernet Connector .....	67
Figure 4-23: Pinout Locations .....	68
Figure 5-1: Install the Socket AM2 CPU .....	75
Figure 5-2: IEI Cooling Kit for KINO-690AM2 .....	76
Figure 5-3: Install the CPU cooler .....	77
Figure 5-4: Installing a DIMM .....	78
Figure 5-5: Clear CMOS Jumper .....	81
Figure 5-6: COM3 Function Select Jumper Location .....	82
Figure 5-7: RS-422 Termination Jumper Location .....	83
Figure 5-8: IDE Cable Connection .....	85
Figure 5-9: Dual RS-232 Cable Installation .....	86
Figure 5-10: SATA Drive Cable Connection .....	87
Figure 5-11: SATA Power Drive Connection .....	88
Figure 5-12: Dual USB Cable Connection .....	89
Figure 5-13: Four Port USB Cable Connection .....	90
Figure 5-14: Audio Connectors .....	91
Figure 5-15: DVI Connector .....	92
Figure 5-16: LAN Connection .....	93
Figure 5-17: PS/2 Keyboard/Mouse Connector .....	94
Figure 5-18: Serial Device Connector .....	95
Figure 5-19: USB Connector .....	96
Figure 5-20: VGA Connector .....	97
Figure 7-1: Introduction Screen .....	153
Figure 7-2: Available Drivers .....	153
Figure 7-3: Chipset Driver Installation Program .....	154

## KINO-690AM2 Mini-ITX Motherboard

Figure 7-4: Chipset Driver Installation Welcome Screen .....	155
Figure 7-5: Chipset Driver Installation License Agreement .....	155
Figure 7-6: Select Destination Folder .....	156
Figure 7-7: Chipset Driver Installing Screen.....	156
Figure 7-8: Welcome Screen .....	157
Figure 7-9: Chipset Driver Readme File Information .....	157
Figure 7-10: Chipset Driver Installation Complete .....	158
Figure 7-11: Setup Complete.....	159
Figure 7-12: Windows Control Panel.....	160
Figure 7-13: System Icon .....	161
Figure 7-14: Device Manager Tab .....	161
Figure 7-15: Device Manager List .....	162
Figure 7-16: Search for Suitable Driver .....	163
Figure 7-17: Locate Driver Files .....	163
Figure 7-18: Location Browsing Window .....	164
Figure 7-19: Select the Audio CODEC.....	165
Figure 7-20: Locate the Setup Program Icon.....	166
Figure 7-21: Preparing Setup Screen .....	166
Figure 7-22: InstallShield Wizard Welcome Screen .....	167
Figure 7-23: Audio Driver Software Configuration.....	167
Figure 7-24: Audio Driver Digital Signal.....	168
Figure 7-25: Audio Driver Installation .....	168
Figure 7-26: Restart the Computer .....	169
Figure 7-27: Chipset Driver Installation Program.....	170
Figure 7-28: Chipset Drivers.....	170
Figure 7-29: RAID Utility Icon .....	171
Figure 7-30: SATA RAID Setup Program Icon .....	171
Figure 7-31: Welcome Screen .....	172
Figure 7-32: WebPAM License Agreement .....	172
Figure 7-33: Select WebPAM Installation Destination .....	173
Figure 7-34: WebPAM Ready to Install.....	173
Figure 7-35: WebPAM Installation .....	174

# List of Tables

Table 1-1: Technical Specifications.....	7
Table 2-1: Power Consumption.....	31
Table 3-1: Package List Contents .....	36
Table 3-2: Package List Contents .....	37
Table 4-1: Peripheral Interface Connectors .....	42
Table 4-2: Rear Panel Connectors .....	42
Table 4-3: ATX Power Connector Pinouts .....	43
Table 4-4: DIO Connector Connector Pinouts .....	44
Table 4-5: Fan Connector Pinouts .....	45
Table 4-6: Front Panel Connector Pinouts (14-pin) .....	46
Table 4-7: IDE Connector Pinouts .....	48
Table 4-8: Infrared Connector Pinouts .....	49
Table 4-9: PCI Slot .....	52
Table 4-10: PCI Express x1 Slot Pinouts.....	54
Table 4-11: SATA Drive Connector Pinouts.....	55
Table 4-12: RS-232/RS-485 Serial Port Connector Pinouts.....	56
Table 4-13: Serial Connector Pinouts.....	57
Table 4-14: Power Connector Pinouts.....	58
Table 4-15: TPM Connector Pinouts.....	59
Table 4-16: TV Port Connector Pinouts.....	60
Table 4-17: USB Port Connector Pinouts.....	61
Table 4-18: DVI-D Connector Pinouts.....	64
Table 4-19: VGA Connector Pinouts.....	65
Table 4-20: PS/2 Connector Pinouts.....	66
Table 4-21: LAN Pinouts .....	66
Table 4-22: RJ-45 Ethernet Connector LEDs .....	67
Table 4-23: USB Port Pinouts.....	67
Table 4-24: RS-232 Serial Port Pinouts .....	68



## KINO-690AM2 Mini-ITX Motherboard

Table 5-1: Jumpers .....	79
Table 5-2: Clear CMOS Jumper Settings.....	80
Table 5-3: COM3 Function Select Jumper Settings .....	81
Table 5-4: RS-422 Termination Jumper Settings.....	82
Table 5-5: IEI Provided Cables .....	84
Table 6-1: BIOS Navigation Keys .....	101

# BIOS Menus

---

Menu 1: Main .....	102
Menu 2: Advanced .....	104
Menu 3: CPU Configuration .....	105
Menu 4: IDE Configuration .....	106
Menu 5: IDE Master and IDE Slave Configuration .....	108
Menu 6: Super IO Configuration .....	113
Menu 7: Hardware Health Configuration .....	117
Menu 8: ACPI Configuration .....	118
Menu 9: Trusted Computing .....	119
Menu 10: Remote Access Configuration [Advanced] .....	120
Menu 11: USB Configuration .....	124
Menu 12: PCI/PnP Configuration .....	127
Menu 13: Boot .....	132
Menu 14: Boot Settings Configuration .....	133
Menu 15: Security .....	135
Menu 16: Chipset .....	137
Menu 17: NorthBridge Chipset Configuration .....	138
BIOS Menu 18: ECC Configuration Chipset Configuration .....	139
BIOS Menu 19: Internal Graphics Configuration .....	141
Menu 20: SouthBridge Chipset Configuration .....	144
Menu 21: Power .....	146
Menu 22: Exit .....	148

# Glossary

AC '97	Audio Codec 97	IDE	Integrated Data Electronics
ACPI	Advanced Configuration and Power Interface	I/O	Input/Output
APM	Advanced Power Management	L1 Cache	Level 1 Cache
ARMD	ATAPI Removable Media Device	L2 Cache	Level 2 Cache
ASKIR	Shift Keyed Infrared	LCD	Liquid Crystal Display
ATA	Advanced Technology Attachments	LPT	Parallel Port Connector
BIOS	Basic Input/Output System	LVDS	Low Voltage Differential Signaling
CFII	Compact Flash Type 2	MAC	Media Access Controller
CMOS	Complementary Metal Oxide Semiconductor	OS	Operating System
CPU	Central Processing Unit	PCI	Peripheral Connect Interface
Codec	Compressor/Decompressor	PIO	Programmed Input Output
COM	Serial Port	PnP	Plug and Play
DAC	Digital to Analog Converter	POST	Power On Self Test
DDR	Double Data Rate	RAM	Random Access Memory
DIMM	Dual Inline Memory Module	SATA	Serial ATA
DIO	Digital Input/Output	S.M.A.R.T	Self Monitoring Analysis and Reporting Technology
DMA	Direct Memory Access	SPD	Serial Presence Detect
EIDE	Enhanced IDE	S/PDI	Sony/Philips Digital Interface
EIST	Enhanced Intel SpeedStep Technology	SDRAM	Synchronous Dynamic Random Access Memory
FDD	Floppy Disk Drive	SIR	Serial Infrared
FDC	Floppy Disk Connector	UART	Universal Asynchronous Receiver-transmitter
FFIO	Flexible File Input/Output	USB	Universal Serial Bus
FIFO	First In/First Out	VGA	Video Graphics Adapter
FSB	Front Side Bus		
IrDA	Infrared Data Association		
HDD	Hard Disk Drive		



**THIS PAGE IS INTENTIONALLY LEFT BLANK**



Chapter

1

# Introduction

---

## 1.1 Overview

The KINO-690AM2 Mini-ITX form factor motherboard is an AMD Socket AM2 processor platform. Up to 4GB of DDR2 DIMM SDRAM and up to four SATA II hard disk drives (HDD) are supported. SATA drives can be installed in a RAID configuration. High-performance PCI Express (PCIe) Gigabit Ethernet (GbE) connectivity is integrated into the system. Eight USB 2.0 channels along with a PCI expansion slot enable system flexibility and expansion. Multi-display interfaces and dual display functions ensure display versatility. Support for a (optional) trusted platform module (TPM) provides additional system security during system boot-up.

### 1.1.1 KINO-690AM2 Features

Some of the KINO-690AM2 features are listed below.

- Supports the following AMD Socket AM2 processors:
  - AMD Athlon™ 64 X2 dual-core
  - AMD Athlon™ 64
  - AMD Sempron™
- Supports two 240-pin 400MHz, 533MHz, 667MHz or 800MHz DDR2 DIMMs each with a maximum capacity of 2GB.
- Four SATA II drives with transfer rates of 3.0Gb/s supported
- Two Ultra ATA 133, Ultra ATA 100, Ultra ATA 66 or Ultra ATA 33 IDE HDDs supported
- Eight USB 2.0 devices supported
- Dual PCIe GbE Ethernet connectors
- Mini-ITX form factor
- RoHS compliant
- Supports ATX power supplies

## 1.2 KINO-690AM2 Overview

### 1.2.1 KINO-690AM2 Overview Photo

The KINO-690AM2 has a wide variety of peripheral interface connectors. **Figure 1-1** is a labeled photo of the peripheral interface connectors on the KINO-690AM2.

## KINO-690AM2 Mini-ITX Motherboard


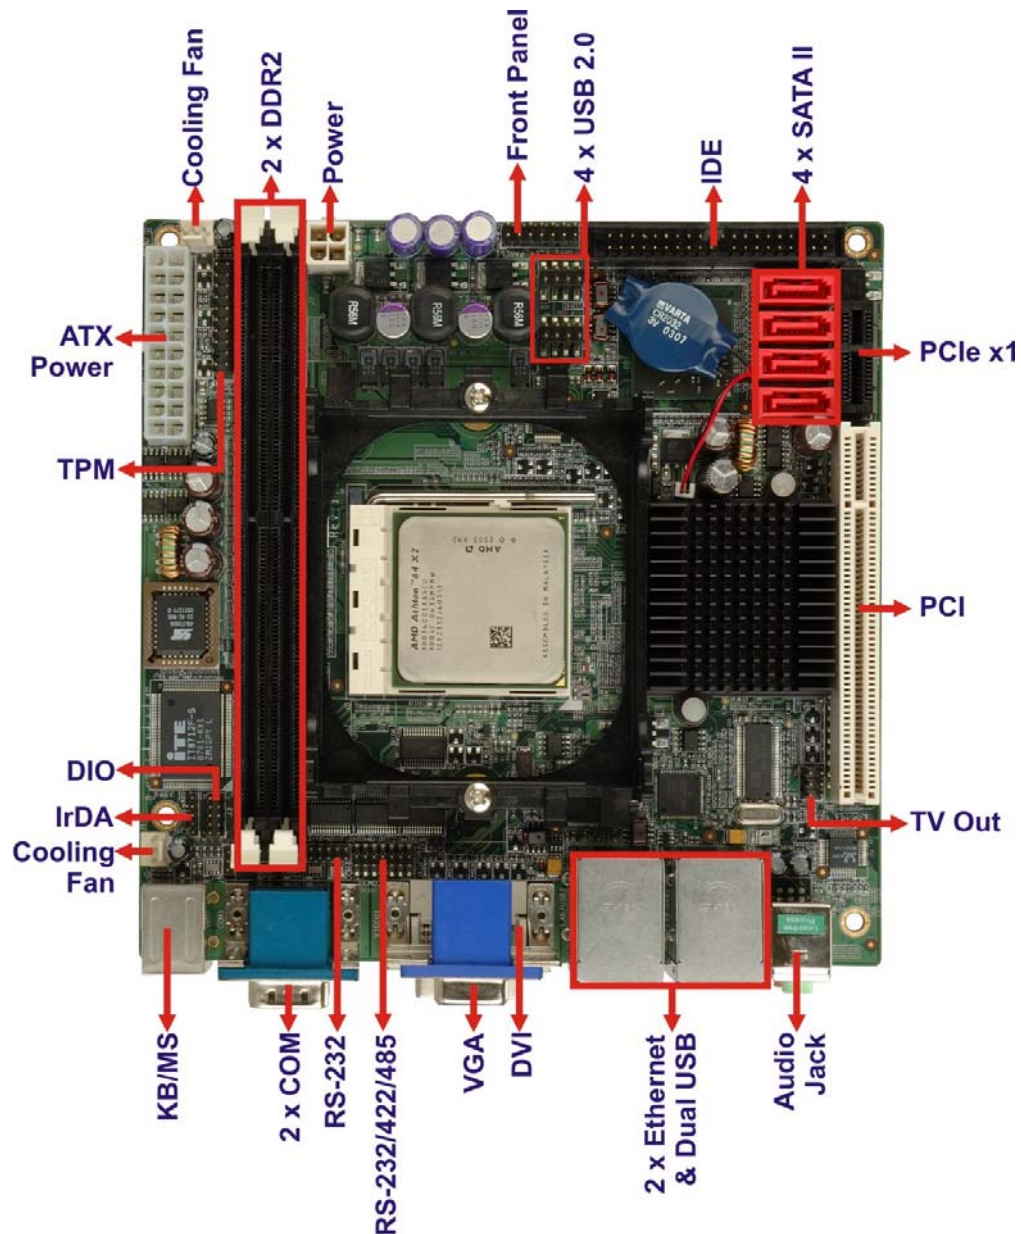


Figure 1-1: KINO-690AM2 Overview [Front View]

Figure 1-2 shows the external peripheral interface connectors (EPIC).

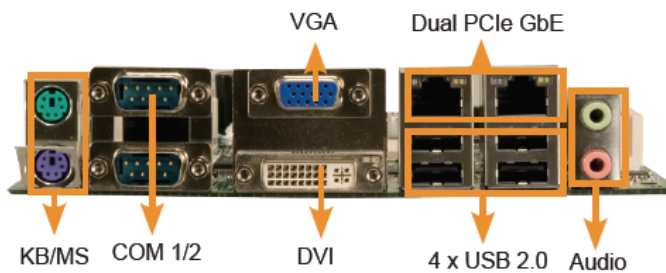

**Figure 1-2: External Peripheral Interface Connectors**

### 1.2.2 KINO-690AM2 Peripheral Connectors and Jumpers

The KINO-690AM2 has the following connectors on-board:

- 1 x ATX power connector
- 1 x Digital input/output connector
- 2 x Fan connectors
- 1 x Front panel connector
- 1 x IDE disk drive connector
- 1 x Infrared interface connector
- 1 x PCI slot
- 1 x PCIe slot
- 4 x Serial ATA II (SATA II) drive connectors
- 1 x Power connector
- 1 x RS-232 Serial port connector
- 1 x RS-232/422/485 Serial port connector
- 1 x TPM connector
- 1 x TV Out connector
- 2 x USB 2.0 connectors (support four USB 2.0 devices)

The KINO-690AM2 has the following external peripheral interface connectors on the board rear panel.

- 2 x Audio Jacks
- 2 x Ethernet connectors
- 1 x DVI-D connector



## KINO-690AM2 Mini-ITX Motherboard

- 2 x PS/2 connectors
- 2 x Serial port connectors
- 4 x USB connectors
- 1 x VGA connector

The KINO-690AM2 has the following on-board jumpers:

- Clear CMOS
- RS-232/422/485 COM3 setup
- RS-422 termination

### 1.2.3 Technical Specifications

KINO-690AM2 technical specifications are listed in **Table 1-1**. See **Chapter 2** for details.

Specification	KINO-690AM2
Form Factor	Mini-ITX
System CPU	AMD® Socket AM2 Athlon™ 64 X2 AMD® Socket AM2 Athlon™ 64 AMD® Socket AM2 Sempron™
HyperTransport™ Technology	Up to 2000 MHz HyperTransport™ interfaces supported
System Chipset	Northbridge: AMD 690G Southbridge: AMD SB600
Memory	Two 240-pin DDR2 DIMM sockets support two 400MHz, 533MHz, 667MHz or 800MHz un-buffered DDR2 DIMMs with a maximum capacity of 2GB each
Super I/O	ITE IT8712F

**KINO-690AM2 Mini-ITX Motherboard**

<b>Display Interface</b>	VGA Integrated in the AMD® 690G with Radeon™ Xpress 1250 Graphic Core
	Supports HDTV resolutions up to 1080i by component interface
	DVI by AMD® 690G with dual display support
<b>BIOS</b>	AMI Flash BIOS
<b>Audio</b>	RealTek ALC655 with AC'97 codec
<b>LAN</b>	Dual Broadcom BCM5787M PCIe GbE chipsets
<b>COM</b>	Three RS-232 serial ports
	One RS-232/422/485 serial port
<b>USB2.0</b>	Eight USB 2.0 devices supported
<b>IDE</b>	One 40-pin IDE connector connects to two Ultra ATA33/66/100/133 devices
<b>SATA</b>	Four 3.0Gb/s SATA II drives supported
<b>Keyboard/mouse</b>	Two PS/2 connectors
<b>Expansion</b>	One PCI slot
	One PCIe x1 slot
<b>Digital I/O</b>	One 8-bit digital input/output connector; 4-bit input/4-bit output
<b>Watchdog Timer</b>	Software programmable 1-255 sec. by super I/O
<b>Infrared</b>	One IrDA connector by Super I/O
<b>Power Supply</b>	AT/ATX power
<b>Power Consumption</b>	5.0V@4.9A AND 12V@2.7A (AMD® Athlon 64 X2 3400T 1.8GHz CPU with a 1GB DDR2 DIMM)

## KINO-690AM2 Mini-ITX Motherboard

Temperature	0°C – 60°C (32°F - 140°F)
Humidity (operating)	5%~95% non-condensing
Dimensions (LxW)	170mm x 170mm
Weight (GW/NW)	1100g/402g

Table 1-1: Technical Specifications



**THIS PAGE IS INTENTIONALLY LEFT BLANK**

Chapter

2

# Detailed Specifications

---




## 2.1 Dimensions

### 2.1.1 Board Dimensions

The dimensions of the board are listed below:

- **Length:** 170mm
- **Width:** 170mm

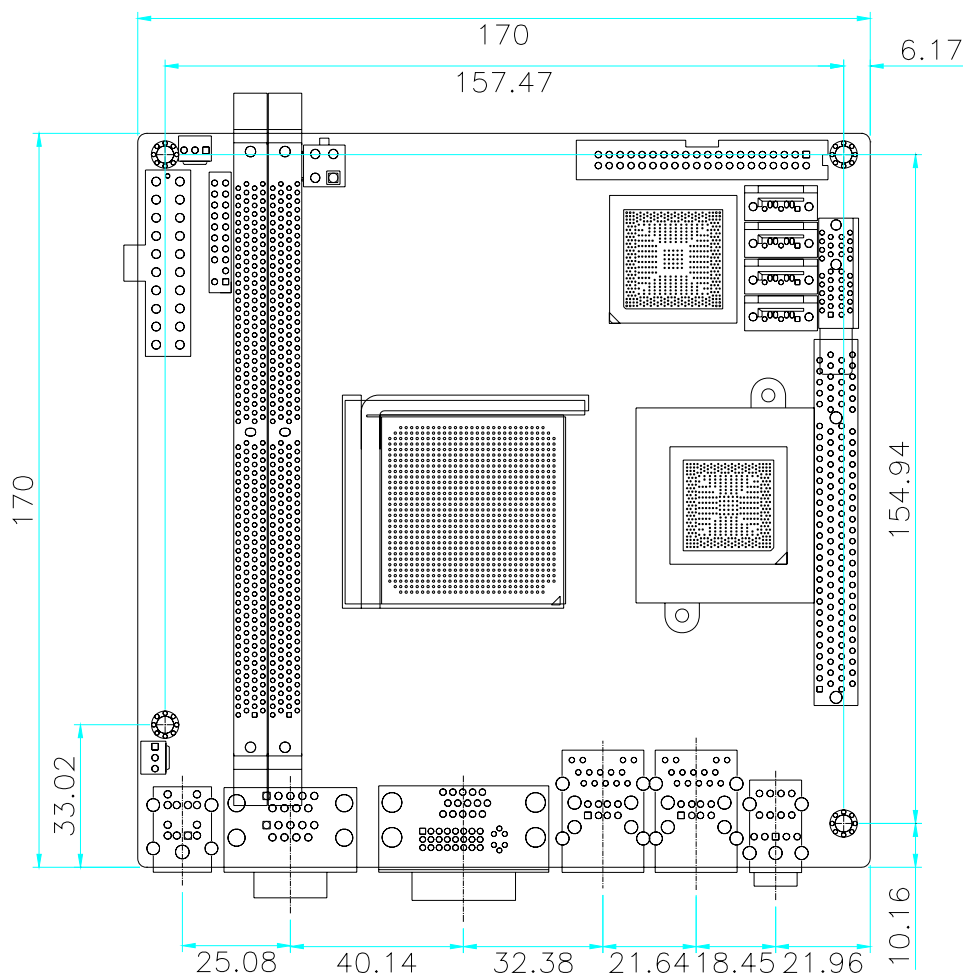


**Figure 2-1: KINO-690AM2 Dimensions (mm)**

## KINO-690AM2 Mini-ITX Motherboard

### 2.1.2 External Interface Panel Dimensions

External peripheral interface connector panel dimensions are shown in **Figure 2-2**.

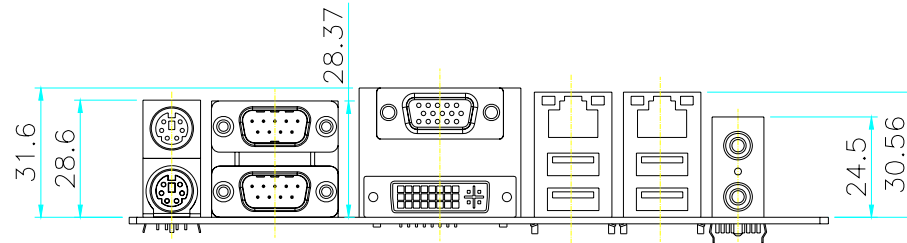

**Figure 2-2: External Interface Panel Dimensions (mm)**

## 2.2 Data Flow

Figure 2-3 shows the data flow between the two on-board chipsets and other components installed on the motherboard and described in the following sections of this chapter.

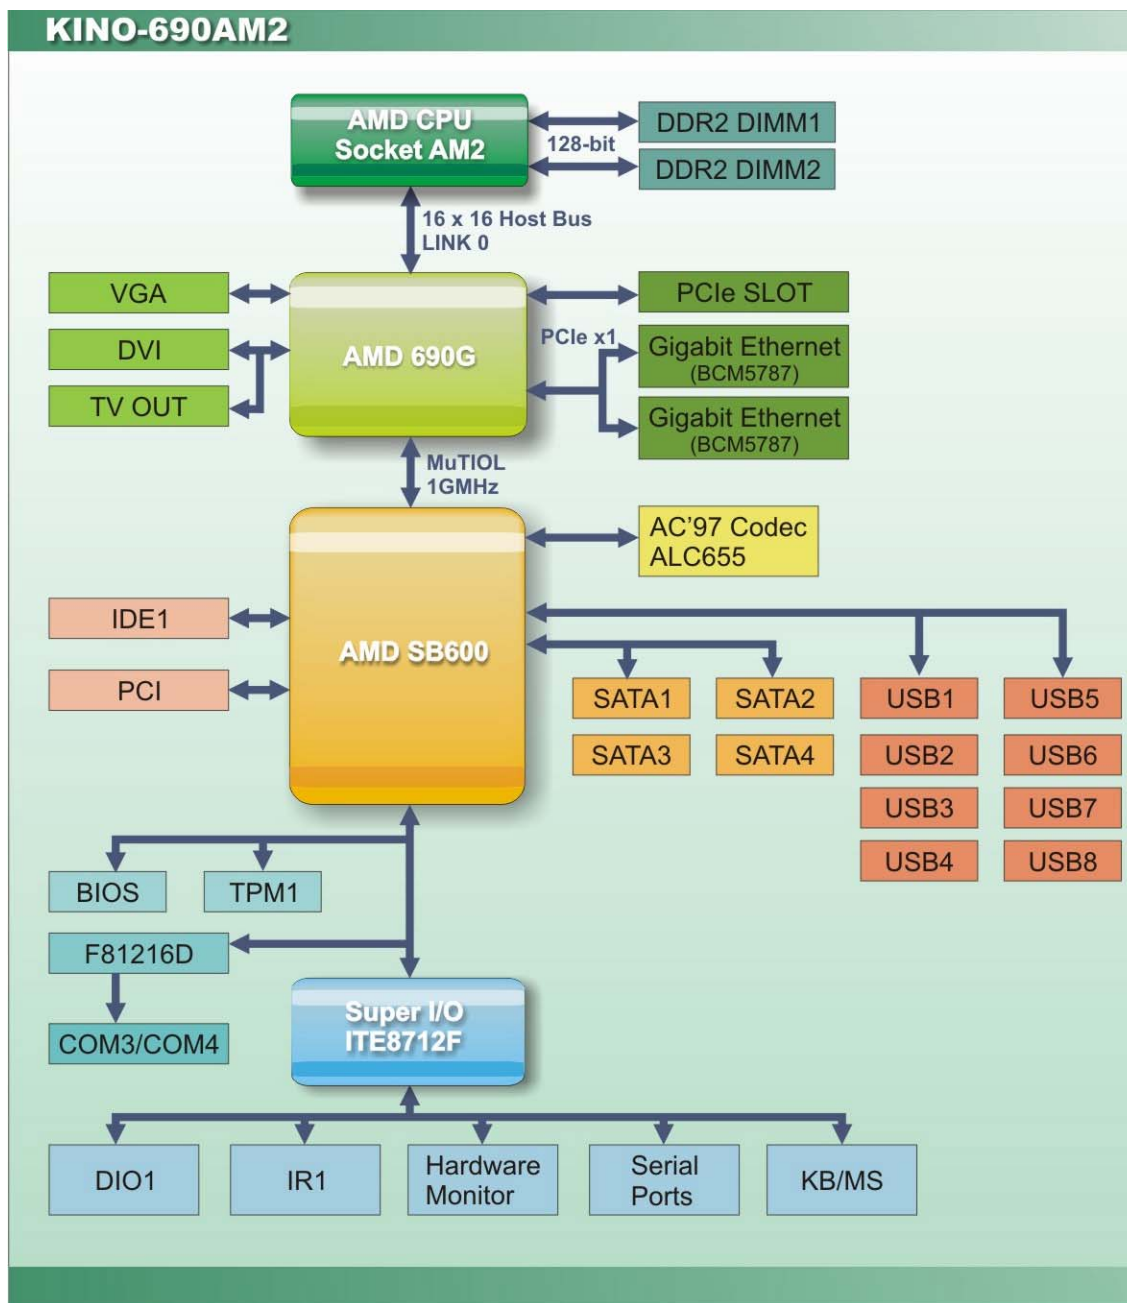


Figure 2-3: Data Flow Block Diagram

## KINO-690AM2 Mini-ITX Motherboard

### 2.3 Compatible Processors

#### 2.3.1 Supported Processors

The KINO-690AM2 supports the following AMD Socket AM2 processors

- AMD Athlon™ 64 processor
- AMD Athlon™ 64 X2 dual-core processor
- AMD Sempron™ processor

#### 2.3.2 DDR2 Memory Controller

All processors supported by the KINO-690AM2 CPU card have their own DDR2 memory controller. The DDR2 controller has the following features:

- Up to 12.8GB/s memory bandwidth
- 800MHz 128-bit DDR2 SDRAM controller
- Supports up to two un-buffered DDR2 DIMM
- Each DIMM has a maximum capacity of 2GB

The DDR2 controller on the processor is interfaced to two DIMM sockets on the KINO-690AM2.

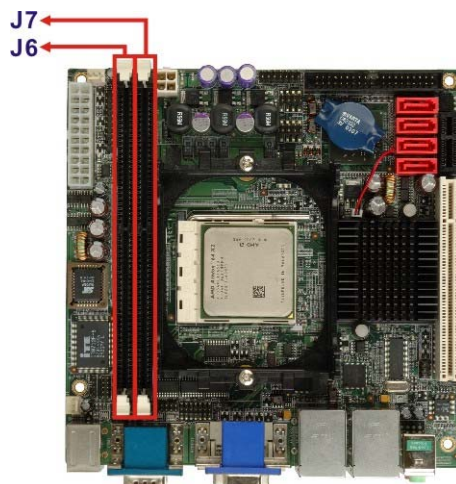


Figure 2-4: DIMM Sockets



### 2.3.3 Processor Electrical Interfaces

The supported processors have the following electrical interfaces:

- HyperTransport™ technology: LVDS-like differential, unidirectional
- DDR SDRAM: SSTL\_2 per JEDEC specification
- Clock, reset, and test signals also use DDR SDRAM-like electrical specifications.

### 2.3.4 Processor Power Management

The supported processors have the following power management features:

- Multiple low-power states including C1E
- System Management Mode (SMM)
- ACPI compliant, including support for processor performance states

## 2.4 AMD 690G Northbridge Chipset

### 2.4.1 PCI Express Interface

The AMD 690G PCIe bus is compliant with the PCI Express 1.1a. Three of the four AMD 690G lanes are implemented on the KINO-690AM2 motherboard. One of these lanes is interfaced to a PCIe x1 expansion slot. Two other PCIe x1 lanes are interfaced to two Broadcom PCIe GbE controllers.

#### 2.4.1.1 PCIe x1 Expansion

One PCIe x1 lane from the AMD 690G is interfaced to a PCIe x1 expansion slot. See **Figure 2-5**. A standard PCIe x1 can be inserted into the slot to provide additional functionality to the system.



## KINO-690AM2 Mini-ITX Motherboard

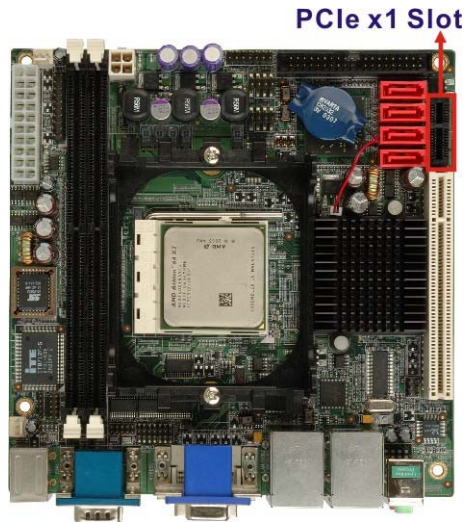


Figure 2-5: PCIe x1 Expansion Slot

### 2.4.2 PCIe GbE Ethernet

Two PCIe x1 lanes from the AMD 690G Northbridge are interfaced to two Broadcom BCM5787M PCIe GbE controllers shown in **Figure 2-6** below.

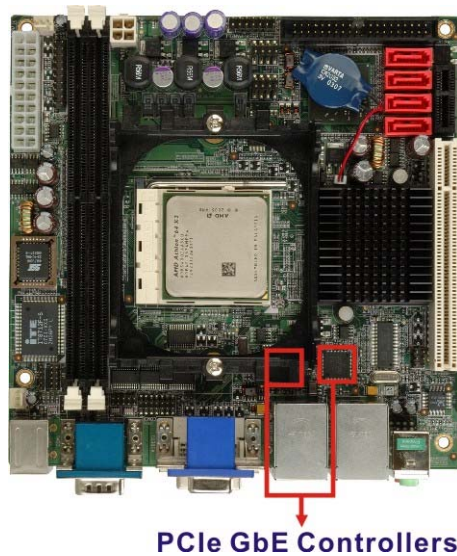


Figure 2-6: Broadcom PCI GbE Controllers

The Broadcom BCM5787M is a 10/100/1000BASE-T Ethernet LAN controller. The BCM5787M combines a triple-speed IEEE 802.3 compliant Media Access Controller

(MAC) with a triple-speed Ethernet transceiver, a PCIe bus interface, and an on-chip buffer memory. Some of the BCM5787 controller features are listed below:

- Integrated 10/100/1000BASE-T transceiver
- Automatic MDI crossover function
- PCIe v1.0a
- 10/100/1000BASE-T full/half-duplex MAC
- Wake on LAN support meeting the ACPI requirements
- Statistics for SNMP MIB II, Ethernet-like MIB, and Ethernet MIB (802.3z, clause 30)
- Serial EEPROM or serial flash support

### **2.4.3 Acceleration Features**

The AMD 690G has the following 2D acceleration features:

- Highly optimized 128-bit engine, capable of processing multiple pixels per clock
- Supports a maximum resolution of 2048x1536 @ 32bpp
- Game acceleration including support for Microsoft's DirectDraw

The AMD 690G also has the following 3D acceleration features:

- Full DirectX 9.0 support
- 3D Texture support, including projective 3D textures
- Anti-aliasing using multi-sampling algorithm with support for 2, 4, and 6 samples
- New generation rendering engine provides top 3D performance
- Support for OpenGL format for Indirect Vertices in Vertex Walker

Motion video acceleration features on the AMD 690G include:

- Enhanced MPEG-2 hardware decode acceleration
- MPEG-4 decode support
- Hardware acceleration for WMV9 playback
- Supports top quality DVD and time-shifted SDTV/HDTV television playback with low CPU usage

## KINO-690AM2 Mini-ITX Motherboard

### 2.4.4 Display Support

The AMD 690G supports dual independent displays. The following display interface connectors are on the KINO-690AM2:

- TV Out
- DVI-D
- VGA

#### 2.4.4.1 TV Out

TV Out features include:

- Integrated TV encoder from Xilleon products with integrated Avivo™
- Supports Macrovision 7.1 copy protection standard (required by DVD players)
- Supports the formats of component, composite and S-video outputs

#### 2.4.4.2 Multiple Display Features

The Multiple display features include

- Dual independent displays including one digital output
- Resolution, refresh rates, and display data can be completely independent for the two display paths
- Supports both interlaced and non-interlaced displays

#### 2.4.4.3 DVI

DVI support features include:

- Supports a TMDS interface, enabling DVI <1650 Mbps/channel with 165 MHz pixel clock rate per link
- HDCP 1.1 support on data stream with on-chip key storage

## 2.5 AMD SB600 Southbridge Chipset

### 2.5.1 CPU Interface

The AMD SB600 Southbridge chipset supports the following AMD Socket AM2 processors:

- AMD Athlon™ 64 X2 dual-core processor
- AMD Athlon™ 64 processor
- AMD Sempron™ processor

### 2.5.2 A-Link Xpress II interface to the Northbridge

The AMD SB600 Southbridge is connected to the AMD 690G Northbridge chipset through an A-Link Xpress II interface. Some of the A-Link Xpress II interface features are listed below:

- 1/2/4-lane A-Link Xpress II interface
- Dynamic detection of lane configuration
- High data transfer bandwidth

### 2.5.3 PCI Host Bus Controller


The PCI interface on the AMD SB600 Southbridge is compliant with the PCI Revision 2.3 implementation. Some of the features of the PCI interface are listed below.

- PCI rev. 2.3 specifications
- PCI bus at 33 MHz
- 40-bit addressing
- Interrupt steering for plug-n-play devices
- Concurrent PCI operations
- Hiding of PCI devices by BIOS/hardware

The PCI bus is interfaced to a PCI expansion slot (see **Figure 2-7**).



## KINO-690AM2 Mini-ITX Motherboard

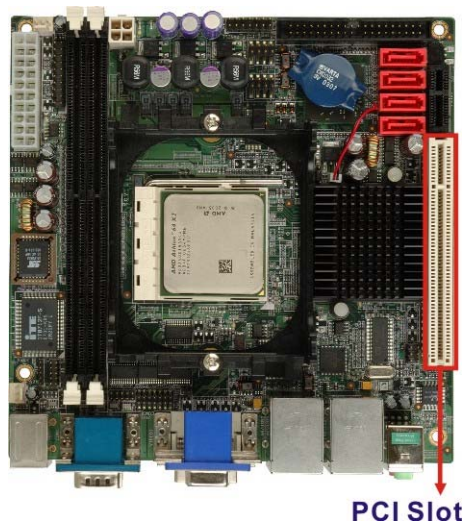

**Figure 2-7: PCI Expansion Slot**

### 2.5.4 USB Controllers

Eight of the ten high-speed, full-speed or low-speed USB ports on the AMD SB600 are implemented on the KINO-690AM2. High-speed USB 2.0, with data transfers of up to 480MB/s, is enabled with the AMD SB600 integrated Enhanced Host Controller Interface (EHCI) compliant host controller. USB full-speed and low-speed signaling are enabled with the integrated Universal Host Controller Interface (UHCI) controllers.


The USB controllers support the following:

- USB 1.1 ("Low Speed", "Full Speed") and 2.0 ("High Speed")
- ACPI S1~S5
- Legacy keyboard/mouse
- Port disable with individual control

Four of the eight USB ports are interfaced to two 8-pin headers on the KINO-690AM2.

Four more USB ports are interfaced to four external USB connectors. See **Figure 2-8**.



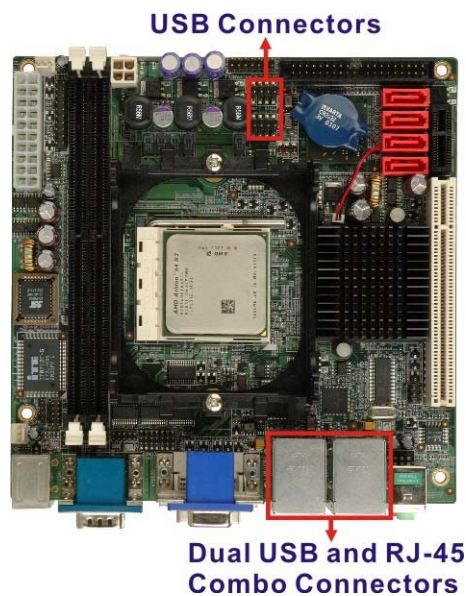

**Figure 2-8: USB Connectors**

### 2.5.5 SMBus Controller

The AMD SB600 Southbridge chipset SMBus Controller is SMBus Rev. 2.0 compliant and supports SMBALERT # signal / GPIO.

### 2.5.6 Interrupt Controller

The AMD SB600 Southbridge interrupt controller supports the following:

- IOAPIC/X-IO APIC mode for 24 channels of interrupts
- 8259 legacy mode for 15 interrupts
- Programmable level/edge triggering on each channels
- Serial interrupt on quiet and continuous modes

### 2.5.7 DMA Controller

The AMD SB600 Southbridge has two cascaded 8237 DMA controllers that support the following:

- PC/PCI/DMA

## KINO-690AM2 Mini-ITX Motherboard

- LPC DMA
- Type F DMA

### 2.5.8 LPC host bus controller

The AMD SB600 Southbridge LPC interface complies with the LPC 1.1 and LPC 1.2 specifications. The LPC bus from the Southbridge is connected to the following components:

- BIOS chipset
- Super I/O chipset
- TPM connector

Some of the features of the LPC bus are listed below.


- Supports LPC based super I/O and flash devices
- Supports two master/DMA devices
- Supports TPM version 1.1/1.2 devices for enhanced security

### 2.5.9 SATA II AHCI Controller

The integrated SATA controllers on the AMD SB600 Southbridge support four SATA II drives on the KINO-690AM2 with independent DMA operations. The SATA controller supports the following:

- Four SATA ports, complying with SATA 2.0 specifications
- SATA II 3.0GHz PHY, with backward compatibility with 1.5GHz
- RAID stripping (RAID 0) across all 4 ports
- RAID mirroring (RAID 1) across all 4 ports
- RAID 10 (4 ports needed)
- Both AHCI mode and IDE mode
- Advanced power management with AHCI mode

The four SATA connectors are shown in Figure 2-9.

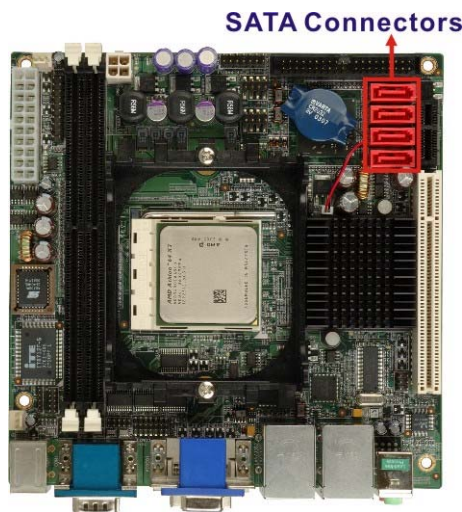

**Figure 2-9: SATA Connectors**

### 2.5.10 IDE Controller

The AMD SB600 Southbridge IDE controller is interfaced to a single IDE connector. The IDE controller has the following specifications.

- Single PATA channel support
- Support PIO, multi-word DMA, and Ultra DMA 33/66/100/133 modes
- 32x32 byte buffers on each channel for buffering
- Swap bay support by tri-state IDE signals
- Supports Messages Signaled Interrupt (MSI)
- Integrated IDE series resistor

The IDE connector is shown in **Figure 2-10**.

## KINO-690AM2 Mini-ITX Motherboard

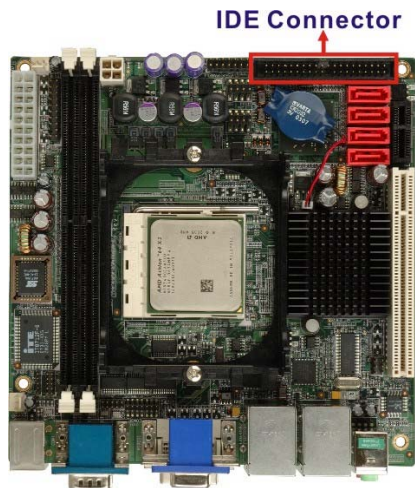


Figure 2-10: IDE Connector


### 2.5.11 AC Link interface

The AMD SB600 Southbridge AC Link interface has the following features:

- Supports for audio codecs
- Compliant with AC-97 codec Rev. 2.3
- 6 channel support on audio codec
- Bus master logic
- AC Link

The AC Link Interface is connected to a 16-bit, full-duplex AC'97 Rev. 2.3 compatible six-channel RealTek ALC655 audio codec. The ALC655 is then connected to two externally accessible audio jacks. See **Figure 2-11**.



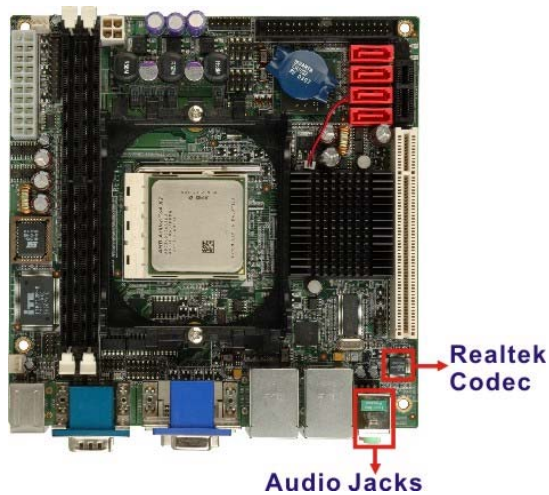

**Figure 2-11: Audio Codec and Audio Jacks**

Some of the features of the ALC655 are listed below:

- Complies with PC99/2001 systems audio performance requirements
- Complies with Microsoft WHQL/WLP 2.0 audio requirements
- 16-bit Stereo full-duplex CODEC with 48KHz sampling rate
- Compliant with AC'97 Rev 2.3 specifications
  - Front-Out, Surround-Out, MIC-In and LINE-In Jack Sensing
  - 14.318MHz -> 24.576MHz PLL to eliminate crystal
  - 12.288MHz BITCLK input
  - Integrated PCBEEP generator to save buzzer
  - Interrupt capability
- Boost preamplifier for MIC input
- LINE input shared with surround output; MIC input shared with Center and LFE output
- Built-in 50mW/20ohm amplifier for both Front-out and Surround-Out
- External Amplifier Power Down (EAPD) capability
- Power management and enhanced power saving features
- Power support: Digital: 3.3V; Analog: 3.3V/5V
- EAX™ 1.0 & 2.0 compatible
- Direct Sound 3D™ compatible
- I3DL2 compatible
- HRTF 3D positional audio

## KINO-690AM2 Mini-ITX Motherboard

- 10-band software equalizer
- Voice cancellation and key shifting in Karaoke mode
- AVRack® Media Player
- Configuration Panel for improved user convenience

### 2.5.12 Timers

The AMD SB600 Southbridge has the following timers

- 8254-compatible timer
- Microsoft High Precision Event Timer (HPET)
- ACPI power management timer

### 2.5.13 RTC (Real Time Clock)

256 bytes of battery backed RAM is provided by the real time clock (RTC) integrated into the AMD SB600. The RTC keeps track of the time and stores system data even when the system is turned off. Some of the features of the RTC are listed below:

- 256-byte battery backed CMOS RAM
- Hardware supported century rollover
- RTC battery monitoring feature

### 2.5.14 Power Management

ACPI specification 3.0 compliant power management schemes on the AMD SB600 include:


- Supports C2, C3, C4
- Supports C1e and C3 pop-up (AMD platform only)
- Supports S0, S1, S2, S3, S4, and S5
- Full support for On-Now™
- Supports CPU SMM, generating SMI# signal upon power management events

## 2.6 LPC Bus Components

### 2.6.1 LPC Bus Overview

The LPC bus is connected to components listed below:

- BIOS chipset
- Super I/O chipset
- Serial port chipset
- TPM module connector

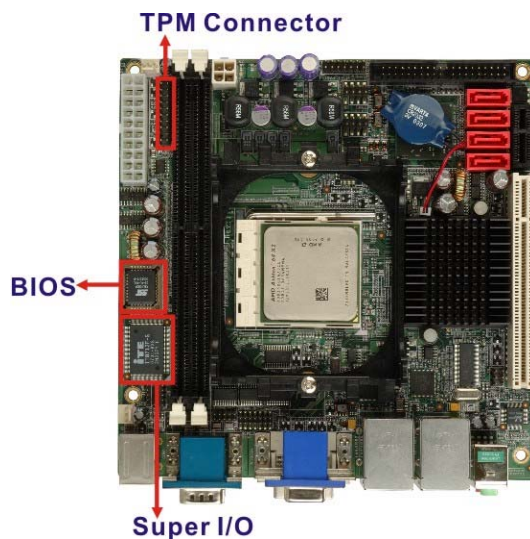

**Figure 2-12: LPC BUS Components**

### 2.6.2 BIOS Chipset:

The BIOS chipset has a licensed copy of AMI BIOS installed on the chipset. Some of the BIOS features are listed below:

- AMI Flash BIOS
- SMIBIOS (DMI) compliant
- Console redirection function support
- PXE (Pre-boot Execution Environment) support
- USB booting support

## KINO-690AM2 Mini-ITX Motherboard

### 2.6.3 TPM Module

A TPM connector on the KINO-690AM2 is interfaced to the AMD SB600 Southbridge through the LPC bus. The AMD SB600 Southbridge supports TPM version 1.1 and TPM version 1.2 devices for enhanced security. Three TPM are available from IEI. The three IEI TPM are listed below:

- Infineon TPM module
- Sinosun TPM module
- Winbond TPM module

For more information about these modules please refer to **Chapter 3** or contact the KINO-690AM2 reseller or vendor. Alternatively, please contact IEI at [sales@iei.com.tw](mailto:sales@iei.com.tw).

### 2.6.4 Super I/O chipset

The iTE IT8712F Super I/O chipset is connected to the AMD SB600 Southbridge through the LPC bus. The iTE IT8712F is an LPC interface-based Super I/O device that comes with Environment Controller integration. Some of the features of the iTE IT8712F chipset are listed below:

- PC98/99/2001, ACPI and LANdesk Compliant
- Enhanced Hardware Monitor
- Fan Speed Controller
- Single +5V Power Supply
- Two 16C550 UARTs for serial port control
- Keyboard Controller
- Watchdog Timer
- Serial IRQ Support
- Vbat & Vcch Support
- Single +5V Power Supply

Some of the Super I/O features are described in more detail below:



#### 2.6.4.1 Super I/O LPC Interface

The LPC interface on the Super I/O complies with the AMD® Low Pin Count Specification Rev. 1.0. The LPC interface supports both LDRQ# and SERIRQ protocols as well as PCI PME# interfaces.

#### 2.6.4.2 Super I/O 16C550 UARTs

The onboard Super I/O has two integrated 16C550 UARTs that can support the following:

- Two standard serial ports
- IrDa 1.0 and ASKIR protocols

#### 2.6.4.3 Super I/O Enhanced Hardware Monitor

The Super I/O Enhanced Hardware Monitor monitors three thermal inputs, VBAT internally, and eight voltage monitor inputs. These hardware parameters are reported in the BIOS and can be read from the BIOS Hardware Health Configuration menu.

#### 2.6.4.4 Super I/O Fan Speed Controller

The Super I/O fan speed controller enables the system to monitor the speed of the fan. One of the pins on the fan connector is reserved for fan speed detection and interfaced to the fan speed controller on the Super I/O. The fan speed is then reported in the BIOS.

#### 2.6.4.5 Super I/O Keyboard and Mouse Controller

The Super I/O keyboard and mouse controller can execute the 8042 instruction set. Some of the keyboard and mouse controller features are listed below:

- The 8042 instruction is compatible with a PS/2 keyboard and PS/2 mouse
- Gate A20 and Keyboard reset output
- Supports multiple keyboard power on events
- Supports mouse double-click and/or mouse move power on events

## KINO-690AM2 Mini-ITX Motherboard

### 2.6.4.6 Super I/O Infrared

The Super I/O has dedicated infrared (IrDA) pins that are interfaced to an IrDA connector.

The IrDA connector is compatible with the following standards:

- ASKIR
- SIR

### 2.6.5 Serial Port Chipset

An onboard Fintek F81216DG chipset provides access to two additional UART serial ports (COM3 and COM4). UART includes 16-byte send/receive FIFO. The Fintek serial port chipset is interfaced to the Southbridge chipset through the LPC bus. Some of the features of the Fintek chipset are listed below:

- Supports LPC interface
- Provides UART (16550 asynchronous) ports
  - 1 x Pure UART
  - 1 x UART+IR
- One Watch dog timer with WDTOUT# signal
- One Frequency input 24/48MHz
- Powered by 3Vcc

## 2.7 Environmental and Power Specifications

### 2.7.1 System Monitoring

Three thermal inputs on the KINO-690AM2 Super I/O Enhanced Hardware Monitor monitor the following temperatures:

- CPU temperature
- System temperature

Five voltage inputs on the KINO-690AM2 Super I/O Enhanced Hardware Monitor monitors the following voltages:

- CPU Core

- +1.20V
- +3.3V
- +5.0V
- +1.8V

The KINO-690AM2 Super I/O Enhanced Hardware Monitor also monitors the following fan speeds:

- CPU Fan speed
- System Fan speed

The values for the above environmental parameters are all recorded in the BIOS Hardware Health Configuration menu.

### **2.7.2 Operating Temperature and Temperature Control**

The maximum and minimum operating temperatures for the KINO-690AM2 are listed below.

- Minimum Operating Temperature: 0°C (32°F)
- Maximum Operating Temperature: 60°C (140°F)

A cooling fan and heat sink must be installed on the CPU. Thermal paste must be smeared on the lower side of the heat sink before it is mounted on the CPU. Heat sinks are also mounted on the Northbridge and Southbridge chipsets to ensure the operating temperature of these chips remain low.

## KINO-690AM2 Mini-ITX Motherboard

### 2.7.3 Power Consumption

**Table 2-1** shows the power consumption parameters for the KINO-690AM2 running with an AMD® Athlon™ 64 X2 3400T 1.8GHz CPU and a 1GB DDR2 DIMM.

Voltage	Current
+5.0V	4.9A
+12V	2.7A

**Table 2-1: Power Consumption**





**THIS PAGE IS INTENTIONALLY LEFT BLANK**

Chapter

3

# Unpacking

---

### 3.1 Anti-static Precautions



#### WARNING:

Failure to take ESD precautions during the installation of the KINO-690AM2 may result in permanent damage to the KINO-690AM2 and severe injury to the user.

Electrostatic discharge (ESD) can cause serious damage to electronic components, including the KINO-690AM2. Dry climates are especially susceptible to ESD. It is therefore critical that whenever the KINO-690AM2, or any other electrical component is handled, the following anti-static precautions are strictly adhered to.

- ***Wear an anti-static wristband:*** - Wearing a simple anti-static wristband can help to prevent ESD from damaging the board.
- ***Self-grounding:*** - Before handling the board touch any grounded conducting material. During the time the board is handled, frequently touch any conducting materials that are connected to the ground.
- ***Use an anti-static pad:*** When configuring the KINO-690AM2, place it on an anti-static pad. This reduces the possibility of ESD damaging the KINO-690AM2.
- ***Only handle the edges of the PCB:*** When handling the PCB, hold the PCB by the edges.

### 3.2 Unpacking

#### 3.2.1 Unpacking Precautions

When the KINO-690AM2 is unpacked, please do the following:

- Follow the anti-static precautions outlined in **Section 3.1**.
- Make sure the packing box is facing upwards so the KINO-690AM2 does not fall out of the box.
- Make sure all the components shown in **Section 3.3** are present.

## KINO-690AM2 Mini-ITX Motherboard

### 3.3 Unpacking Checklist







#### NOTE:



If some of the components listed in the checklist below are missing, please do not proceed with the installation. Contact the IEI reseller or vendor you purchased the KINO-690AM2 from or contact an IEI sales representative directly. To contact an IEI sales representative, please send an email to [sales@iei.com.tw](mailto:sales@iei.com.tw).

#### 3.3.1 Package Contents

The KINO-690AM2 is shipped with the following components:







Quantity	Item and Part Number	Image
1	KINO-690AM2	
1	ATA 66/100 flat cable (P/N: 32200-008800-RS)	
1	I/O Shielding (P/N: 45014-0008C0-00-RS)	
1	Dual RS-232 cable (P/N: 32200-028401-RS)	



2	SATA cables (P/N: 32000-062800-RS)	
1	SATA power cables (P/N: 32100-088600-RS)	
1	Mini jumper Pack	
1	Quick Installation Guide	
1	Utility CD	

**Table 3-1: Package List Contents**

### 3.4 Optional Items

CPU cooler (P/N: CF-AM2-RS)	
CPU cooler (P/N: CF-519-RS)	
HDTV Output Cable (P/N: 32000-083701-RS)	
Dual RS-232 cable (P/N: 32200-000077-RS)	
Dual USB cable (w bracket) (P/N: CB-USB02-RS)	
4-port USB cable (P/N: CB-USB14-RS)	

**Table 3-2: Package List Contents**



**THIS PAGE IS INTENTIONALLY LEFT BLANK**

Chapter

4

# Connector Pinouts

---




## 4.1 Peripheral Interface Connectors

**Section 4.1.1** shows peripheral interface connector locations. **Section 4.1.2** lists all the peripheral interface connectors seen in **Section 4.1.1**.

### 4.1.1 KINO-690AM2 Layout

**Figure 4-1** shows the on-board peripheral connectors, rear panel peripheral connectors and on-board jumpers.

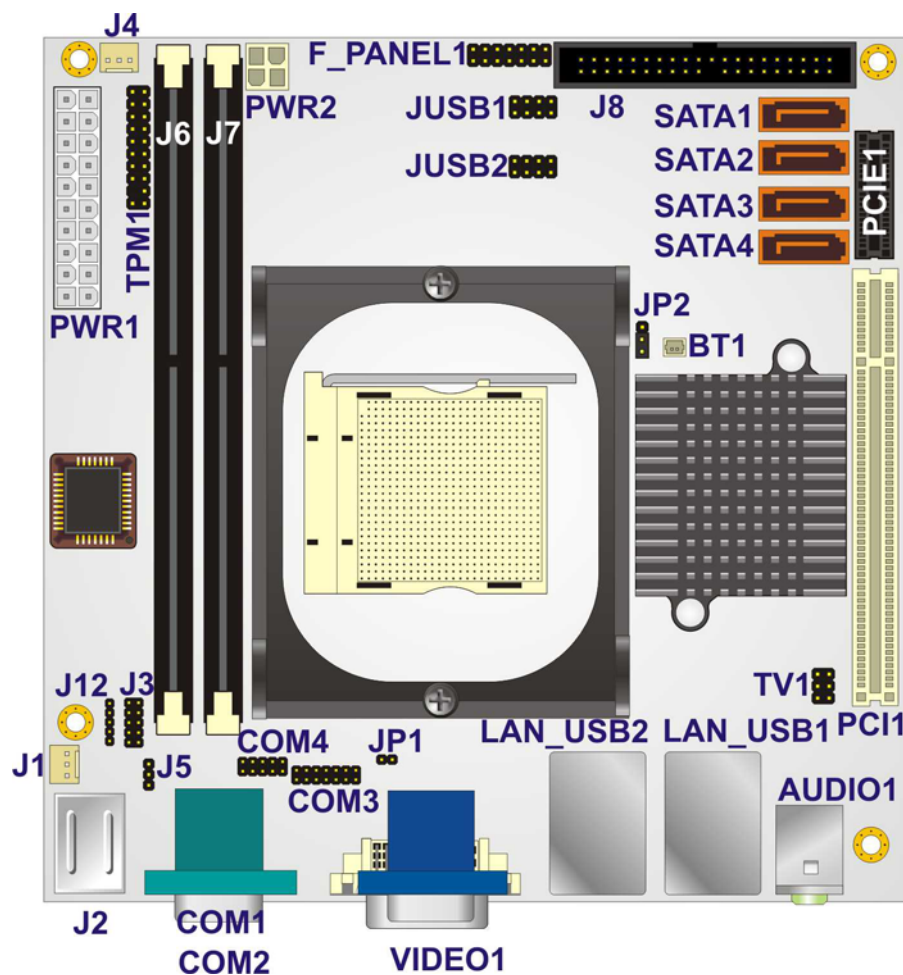

**Figure 4-1: Connector and Jumper Locations**

#### 4.1.2 Peripheral Interface Connectors

**Table 4-1** shows a list of the peripheral interface connectors on the KINO-690AM2. Detailed descriptions of these connectors can be found below.

Connector	Type	Label
ATX power connector	20-pin ATX	PWR1
Cooling fan connector (1)	3-pin wafer connector	J1
Cooling fan connector (2)	3-pin wafer connector	J4
Digital input/output connector	10-pin header	J3
Front panel connector	14-pin header	F_PANEL1
IDE Interface connector	40-pin box header	J8
Infrared (IrDA) connector	5-pin header	J12
PCI expansion slot	124-pin PCI slot	PCI1
PCIe x1 expansion slot	36-pin PCIe slot	PCIE1
Power connector	4-pin connector	PWR2
Serial ATA drive connector	7-pin SATA	SATA1
Serial ATA drive connector	7-pin SATA	SATA2
Serial ATA drive connector	7-pin SATA	SATA3
Serial ATA drive connector	7-pin SATA	SATA4
Serial port connector (COM3)	14-pin header	COM3
Serial port connector (COM4)	10-pin header	COM4
TPM connector	20-pin header	TPM1
TV Out connector	6-pin header	TV1
USB connector	8-pin header	JUSB1

USB connector	8-pin header	JUSB2
---------------	--------------	-------

**Table 4-1: Peripheral Interface Connectors**

### 4.1.3 External Interface Panel Connectors

**Table 4-2** lists the rear panel connectors on the KINO-690AM2. Detailed descriptions of these connectors can be found in **Section 4.3**.

Connector	Type	Label
Audio connector	Audio jack	AUDIO1
DVI and VGA combo connector	DVI and DB-15	VIDEO1
Ethernet and dual USB combo connector	RJ-45 and two USB	LAN/USB1
Ethernet and dual USB combo connector	RJ-45 and two USB	LAN/USB2
Mouse or keyboard connector	PS/2	J2
Serial port connector (COM1)	DB-9 (male)	COM1
Serial port connector (COM2)	DB-9 (male)	COM2

**Table 4-2: Rear Panel Connectors**

## 4.2 Internal Peripheral Connectors

Internal peripheral connectors are found on the motherboard and are only accessible when the motherboard is outside of the chassis. This section has complete descriptions of all the internal, peripheral connectors on the KINO-690AM2.


### 4.2.1 ATX Power Connector

<b>CN Label:</b>	PWR1
<b>CN Type:</b>	20-pin ATX (2x10)
<b>CN Location:</b>	See Figure 4-2

## KINO-690AM2 Mini-ITX Motherboard

**CN Pinouts:** See Table 4-3

The ATX connector is connected to an external ATX power supply. Power is provided to the system, from the power supply through this connector.

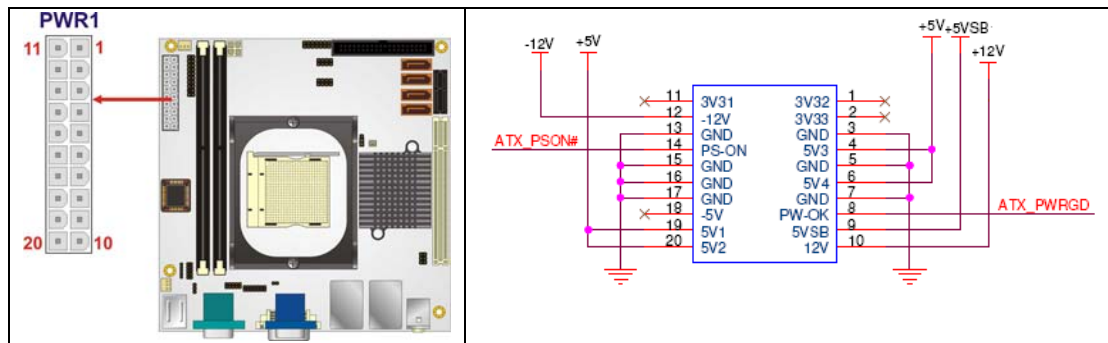

**Figure 4-2: ATX Power Connector Pinout Locations**

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
11	NC	1	NC
12	-12V	2	NC
13	GND	3	GND
14	PS_ON	4	VCC5
15	GND	5	GND
16	GND	6	VCC5
17	GND	7	GND
18	NC	8	NC
19	VCC5	9	5VSB
20	VCC5	10	VCC5

**Table 4-3: ATX Power Connector Pinouts**

### 4.2.2 Digital Input/Output (DIO) Connector

**CN Label:** J3


**CN Type:** 10-pin header (2x5)

**CN Location:** See Figure 4-3



**CN Pinouts:** See Table 4-4

The digital input/output connector is managed through a Super I/O chip. The DIO connector pins are user programmable.

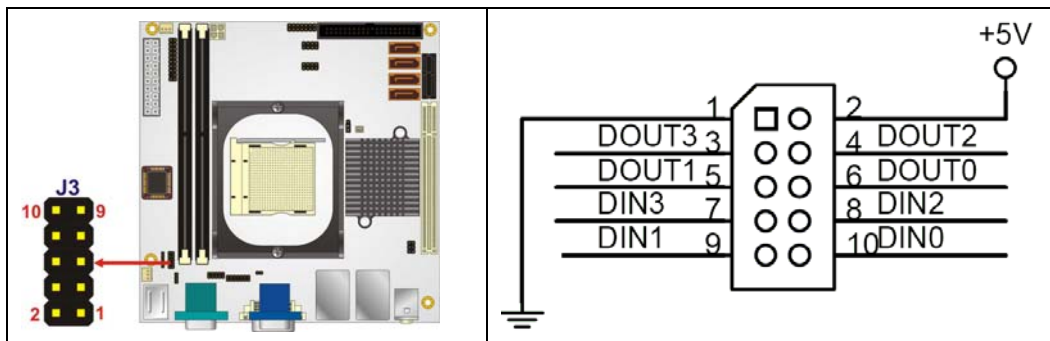

**Figure 4-3: DIO Connector Connector Locations**

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	GND	2	VCC
3	Output 3	4	Output 2
5	Output 1	6	Output 0
7	Input 3	8	Input 2
9	Input 1	10	Input 0

**Table 4-4: DIO Connector Connector Pinouts**

### 4.2.3 Fan Connector

**CN Label:** J1, J4

**CN Type:** 3-pin header


**CN Location:** See Figure 4-4

**CN Pinouts:** See Table 4-5

The cooling fan connectors provide a 12V, 500mA current to two system cooling fans. The connectors both have a "rotation" pin to get rotation signals from fans and notify the

## KINO-690AM2 Mini-ITX Motherboard

system so the system BIOS can recognize the fan speed. Please note that only specified fans can issue the rotation signals.

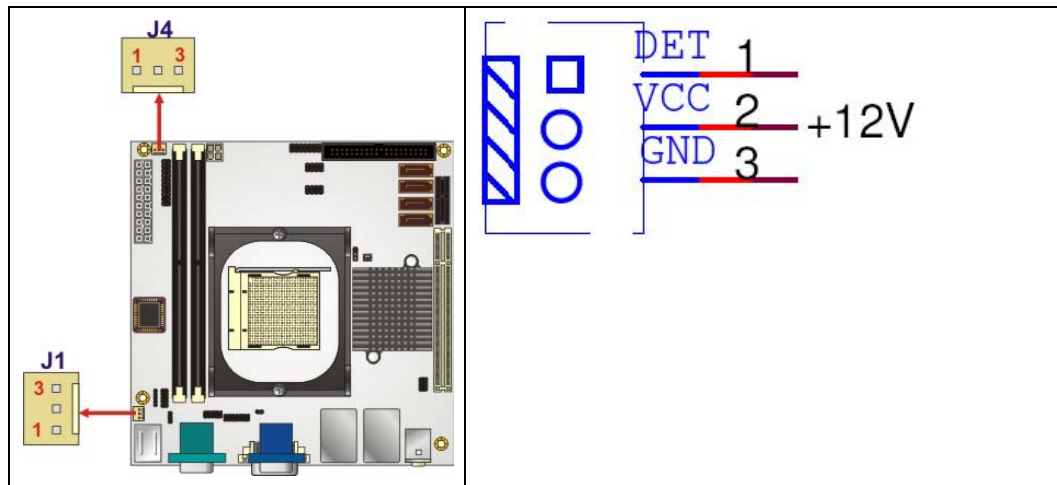

**Figure 4-4: Fan Connector Location**

PIN NO.	DESCRIPTION
1	Fan Speed Detect
2	Fan Power
3	GND

**Table 4-5: Fan Connector Pinouts**


### 4.2.4 Front Panel Connector (14-pin)

<b>CN Label:</b>	F_PANEL1
<b>CN Type:</b>	14-pin header (2x6)
<b>CN Location:</b>	See Figure 4-5
<b>CN Pinouts:</b>	See Table 4-6

The front panel connector connects to external switches and indicators to monitor and controls the motherboard. These indicators and switches include:

- Power LED

- Speaker
- Power button
- Reset
- HDD LED

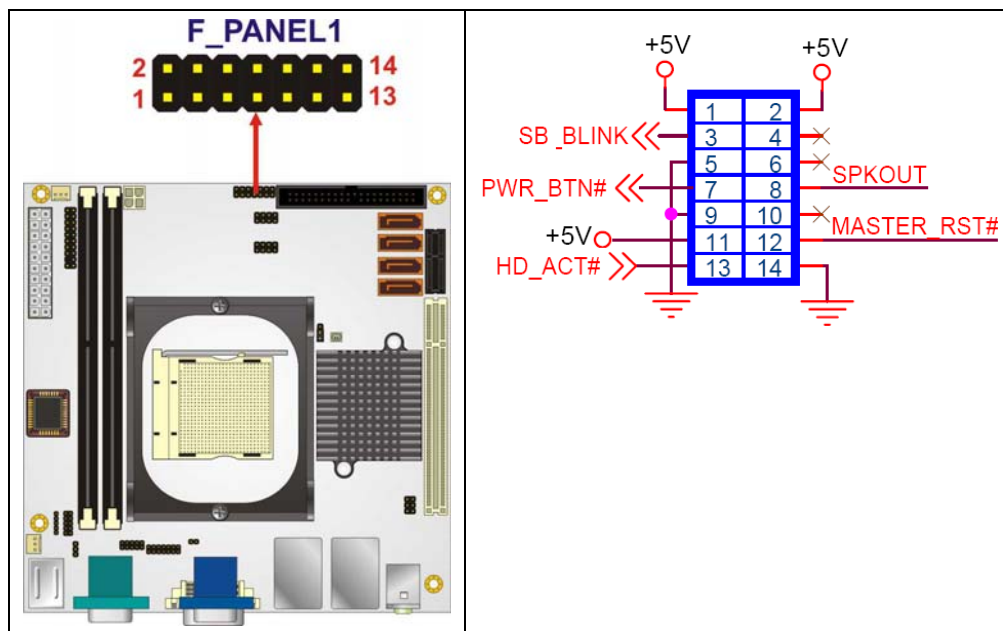

**Figure 4-5: Front Panel Connector Pinout Locations (14-pin)**

FUNCTION	PIN	DESCRIPTION	FUNCTION	PIN	DESCRIPTION
Power LED	1	LED+	Speaker	2	SPEAKER+
	3	BLINK		4	N/C
	5	GND		6	N/C
Power Button	7	PWRBTSW+	Reset	8	SPEAKER -
	9	GND		10	N/C
HDD LED	11	IDE LED+		12	RESET+
	13	IDE LED-		14	GND

**Table 4-6: Front Panel Connector Pinouts (14-pin)**

## KINO-690AM2 Mini-ITX Motherboard

### 4.2.5 IDE Connector (40-pin)

<b>CN Label:</b>	J8
<b>CN Type:</b>	40-pin header (2x20)
<b>CN Location:</b>	See Figure 4-6
<b>CN Pinouts:</b>	See Table 4-7

One 40-pin IDE device connector on the KINO-690AM2 supports connectivity to two hard disk drives.

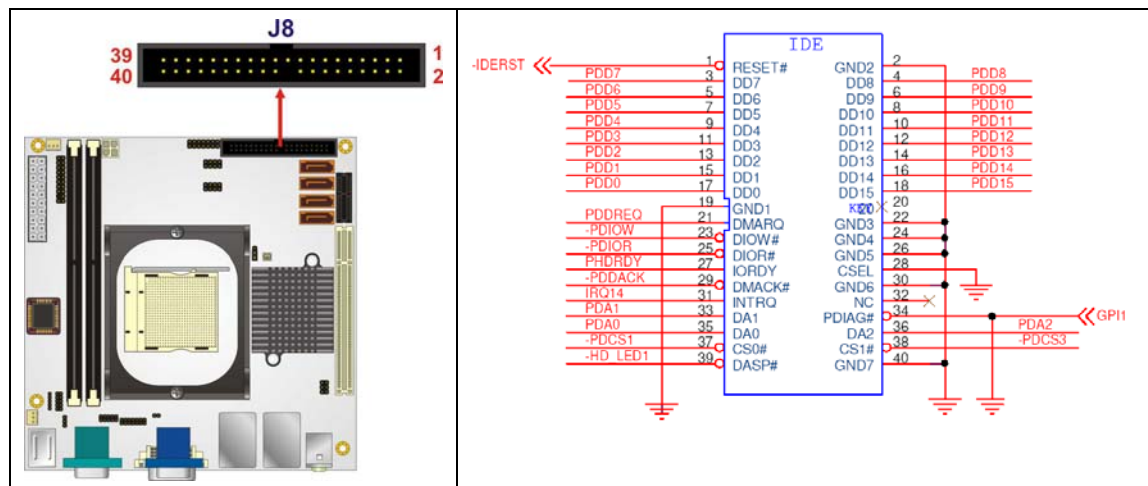


Figure 4-6: IDE Device Connector Locations

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	RESET#	2	GROUND
3	DATA 7	4	DATA 8
5	DATA 6	6	DATA 9
7	DATA 5	8	DATA 10
9	DATA 4	10	DATA 11
11	DATA 3	12	DATA 12
13	DATA 2	14	DATA 13
15	DATA 1	16	DATA 14
17	DATA 0	18	DATA 15




19	GROUND	20	N/C
21	IDE DRQ	22	GROUND
23	IOW#	24	GROUND
25	IOR#	26	GROUND
27	IDE CHRDY	28	GROUND
29	IDE DACK	30	GROUND-DEFAULT
31	INTERRUPT	32	N/C
33	SA1	34	N/C
35	SA0	36	SA2
37	HDC CS0#	38	HDC CS1#
39	HDD ACTIVE#	40	GROUND

**Table 4-7: IDE Connector Pinouts**

#### 4.2.6 Infrared Interface Connector (5-pin)

<b>CN Label:</b>	J12
<b>CN Type:</b>	5-pin header (1x5)
<b>CN Location:</b>	See Figure 4-7
<b>CN Pinouts:</b>	See Table 4-8

The infrared interface connector supports both Serial Infrared (SIR) and Amplitude Shift Key Infrared (ASKIR) interfaces.

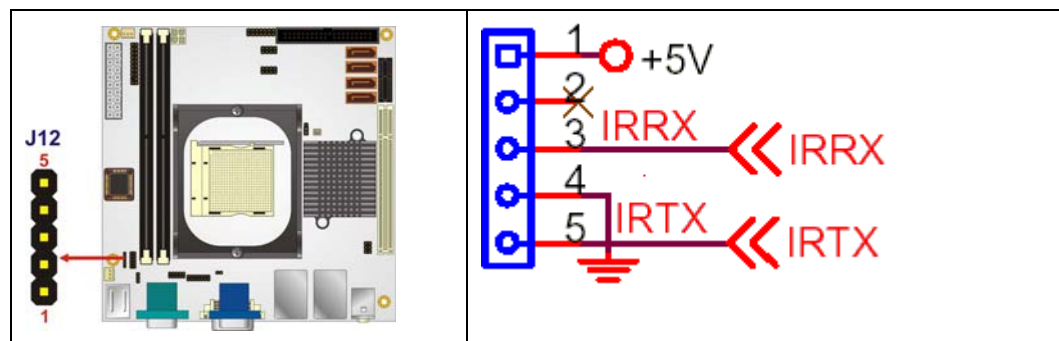

**Figure 4-7: Infrared Connector Pinout Locations**

## KINO-690AM2 Mini-ITX Motherboard

PIN NO.	DESCRIPTION
1	VCC5
2	NC
3	IR-RX
4	GND
5	IR-TX

**Table 4-8: Infrared Connector Pinouts**

### 4.2.7 PCI Slot


**CN Label:** PCI1


**CN Type:** PCI Slot

**CN Location:** See Figure 4-8

**CN Pinouts:** See Table 4-9

The PCI slot enables a PCI expansion module to be connected to the board.

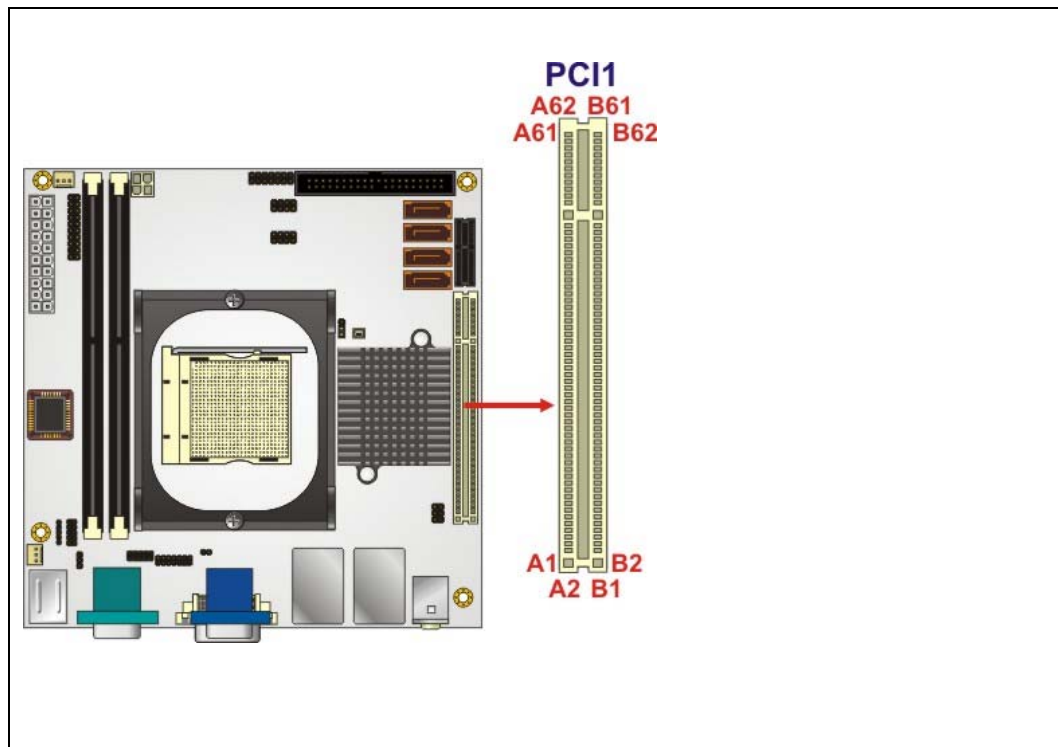

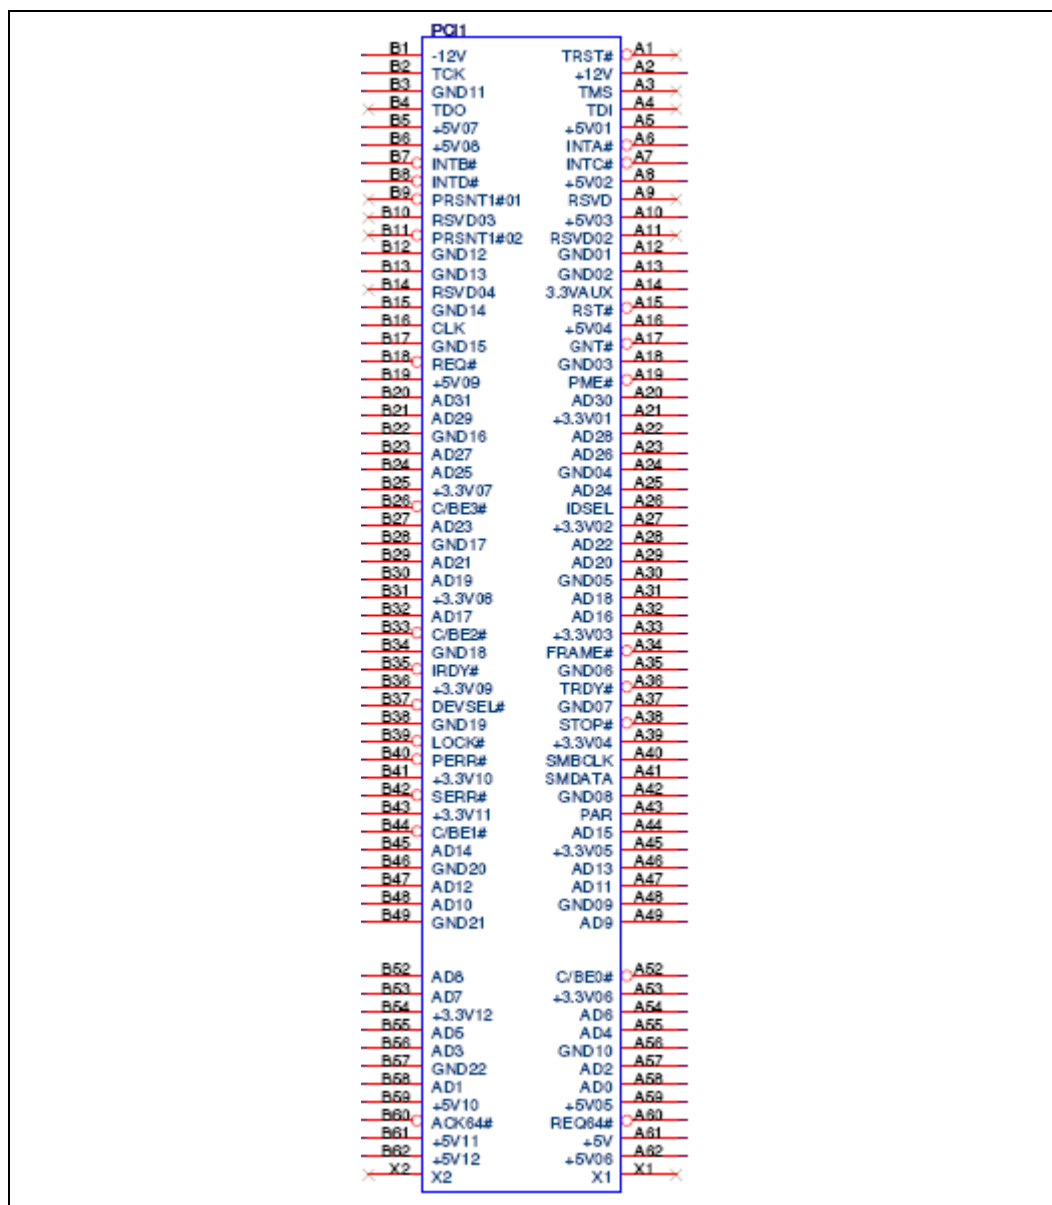

**Figure 4-8: PCI Slot Location**

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
A1	TRST	B1	-12V
A2	+12V	B2	TCK
A3	TMS	B3	GND
A4	TDI	B4	TDO

## KINO-690AM2 Mini-ITX Motherboard

A5	+5V	B5	+5V
A6	INTA	B6	+5V
A7	INTC	B7	INTB
A8	+5V	B8	INTD
A9	RESERVED3	B9	PRSNT1
A10	+5V	B10	RESERVED1
A11	RESERVED4	B11	PRSNT2
A12	GND	B12	GND
A13	GND	B13	GND
A14	3.3V_AUX	B14	RESERVED2
A15	RST	B15	GND
A16	+5V	B16	CLK
A17	GNT	B17	GND
A18	GND	B18	REQ
A19	PME	B19	+5V
A20	AD30	B20	AD31
A21	+3.3V	B21	AD29
A22	AD28	B22	GND
A23	AD26	B23	AD27
A24	GND	B24	AD25
A25	AD24	B25	+3.3V
A26	IDSEL	B26	C/BE3
A27	+3.3V	B27	AD23
A28	AD22	B28	GND
A29	AD20	B29	AD21
A30	GND	B30	AD19
A31	AD18	B31	+3.3V
A32	AD16	B32	AD17
A33	+3.3V	B33	C/BE2
A34	FRAME	B34	GND
A35	GND	B35	IRDY
A36	TRDY	B36	+3.3V



A37	GND	B37	DEVSEL
A38	STOP	B38	GND
A39	+3.3V	B39	LOCK
A40	SDONE	B40	PERR
A41	SBO	B41	+3.3V
A42	GND	B42	SERR
A43	PAR	B43	+3.3V
A44	AD15	B44	C/BE1
A45	+3.3V	B45	AD14
A46	AD13	B46	GND
A47	AD11	B47	AD12
A48	GND	B48	AD10
A49	AD9	B49	GND
A52	C/BE0	B52	AD8
A53	+3.3V	B53	AD7
A54	AD6	B54	+3.3V
A55	AD4	B55	AD5
A56	GND	B56	AD3
A57	AD2	B57	GND
A68	AD0	B68	AD1
A59	+5V	B59	+5V
A60	REQ64	B60	ACK64
A61	+5V	B61	+5V
A62	+5V	B62	+5V

**Table 4-9: PCI Slot**

#### **4.2.8 PCI Express x1 Slot**

**CN Label:** PCIE1


**CN Type:** 36-pin PCIe slot

**CN Location:** See Figure 4-9

## KINO-690AM2 Mini-ITX Motherboard

**CN Pinouts:** See Table 4-10

PCIe x1 expansion devices can be inserted into the PCIe x1 slots.

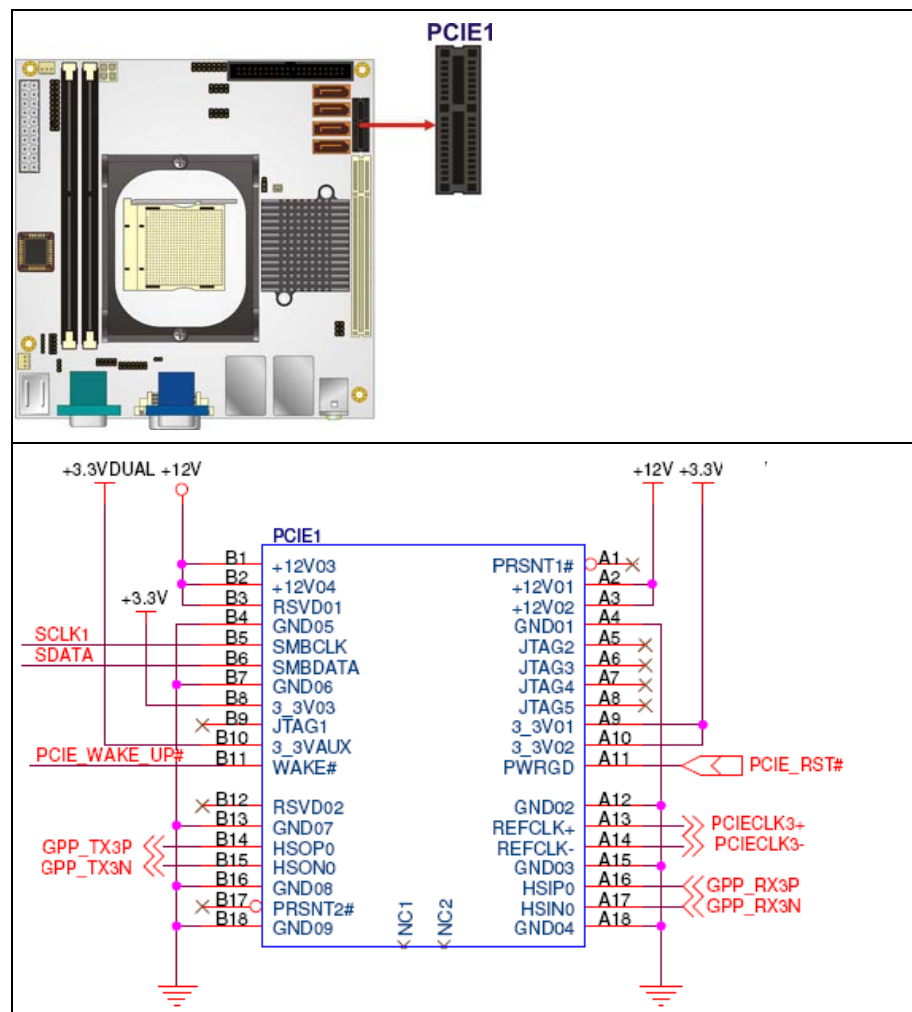

**Figure 4-9: PCI Express x1 Slot Locations**

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
A1	NC	B1	+ 12v
A2	+ 12v	B2	+ 12v
A3	+ 12v	B3	+ 12v
A4	GND	B4	GND
A5	NC	B5	SCLOCK

A6	NC	B6	SDATA
A7	NC	B7	GND
A8	NC	B8	+3.3v
A9	+3.3v	B9	NC
A10	+3.3v	B10	+3.3v Dual
A11	PCI E RST	B11	PCI E WAKEUP
A12	GND	B12	NC
A13	PCI E CLOCK+	B13	GND
A14	PCI E CLOCK-	B14	GPP_TX3P
A15	GND	B15	GPP_TX3N
A16	GPP_RX3P	B16	GND
A17	GPP_RX3N	B17	N/C
A18	GND	B18	GND

**Table 4-10: PCI Express x1 Slot Pinouts**

#### **4.2.9 SATA Drive Connectors**

**CN Label:** SATA1, SATA2, SATA3, and SATA4

**CN Type:** 7-pin SATA drive connectors

**CN Location:** See Figure 4-10

**CN Pinouts:** See Table 4-11

The two SATA drive connectors are each connected to a SATA II drive. A SATA II drive transfer data at speeds as high as 3.0Gb/s. The SATA drives can be configured in a RAID configuration.

## KINO-690AM2 Mini-ITX Motherboard

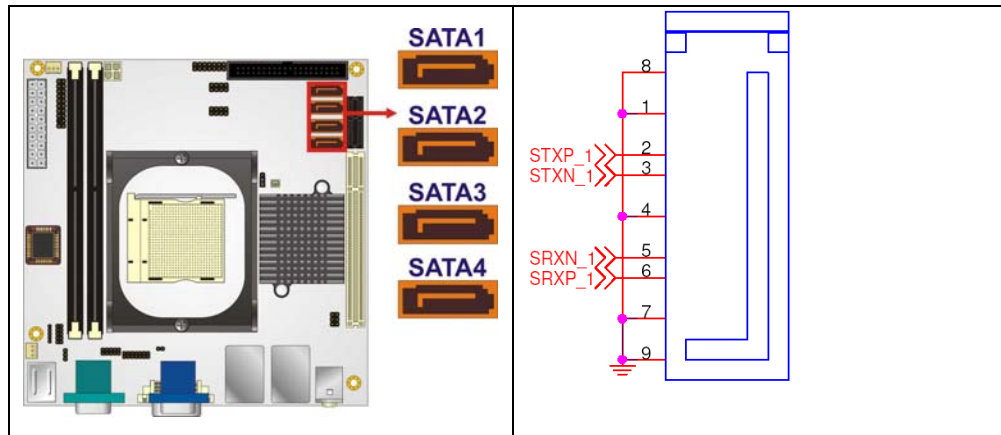


Figure 4-10: SATA Drive Connector Locations

PIN NO.	DESCRIPTION
1	GND
2	TX+
3	TX-
4	GND
5	RX-
6	RX+
7	GND


Table 4-11: SATA Drive Connector Pinouts

### 4.2.10 Serial Port Connector (COM3)(RS-232, RS-422 or RS-485)

<b>CN Label:</b>	COM3
<b>CN Type:</b>	14-pin header (2x7)
<b>CN Location:</b>	See Figure 4-11
<b>CN Pinouts:</b>	See Table 4-12

The 14-pin serial port connector connects to the COM 2 serial communications channels. COM 2 is a multi function channel. In default mode COM 2 is an RS-232 serial communication channel but, with the COM 2 function select jumper, can be configured as either an RS-422 or RS-485 serial communications channel.



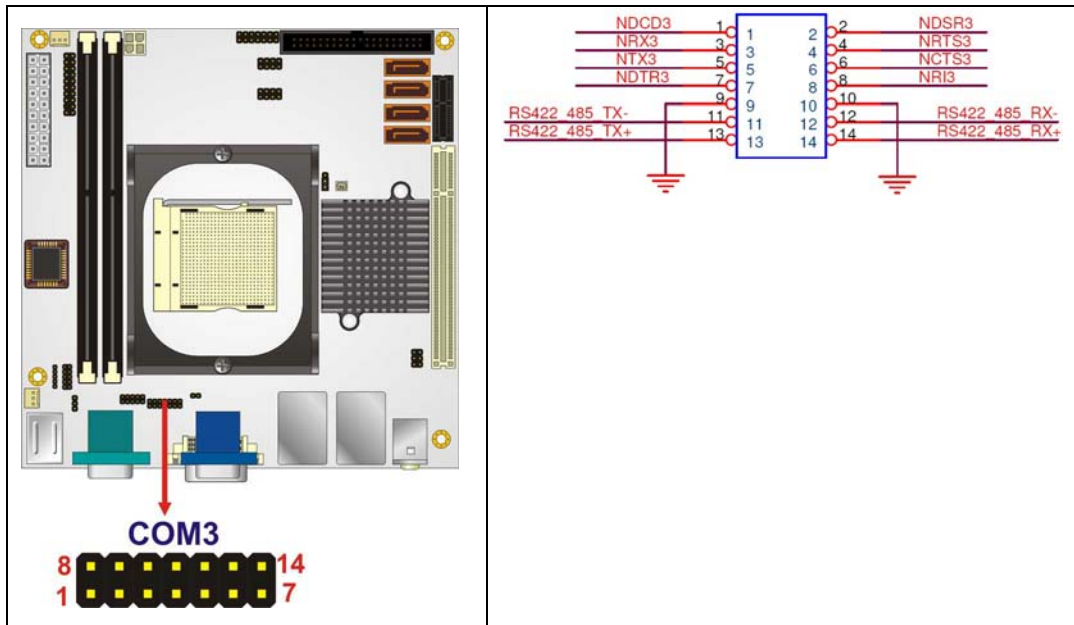

**Figure 4-11: RS-232/422/485 Serial Port Connector Location**

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	DCD	2	DSR
3	RXD	4	RTS
5	TXD	6	CTS
7	DTR	8	RI
9	GND	10	GND
11	RS422_TX-	12	RS422_RX-; RS485_D-
13	RS422_TX+	14	RS422_RX+; RS485_D+

**Table 4-12: RS-232/RS-485 Serial Port Connector Pinouts**

#### 4.2.11 Serial Port Connector (COM4)

- CN Label:** COM4
- CN Type:** 10-pin header (2x5)
- CN Location:** See Figure 4-12
- CN Pinouts:** See Table 4-13

## KINO-690AM2 Mini-ITX Motherboard

The 10-pin serial port connector provides a second RS-232 serial communications channel. The COM 4 serial port connector can be connected to external RS-232 serial port devices.

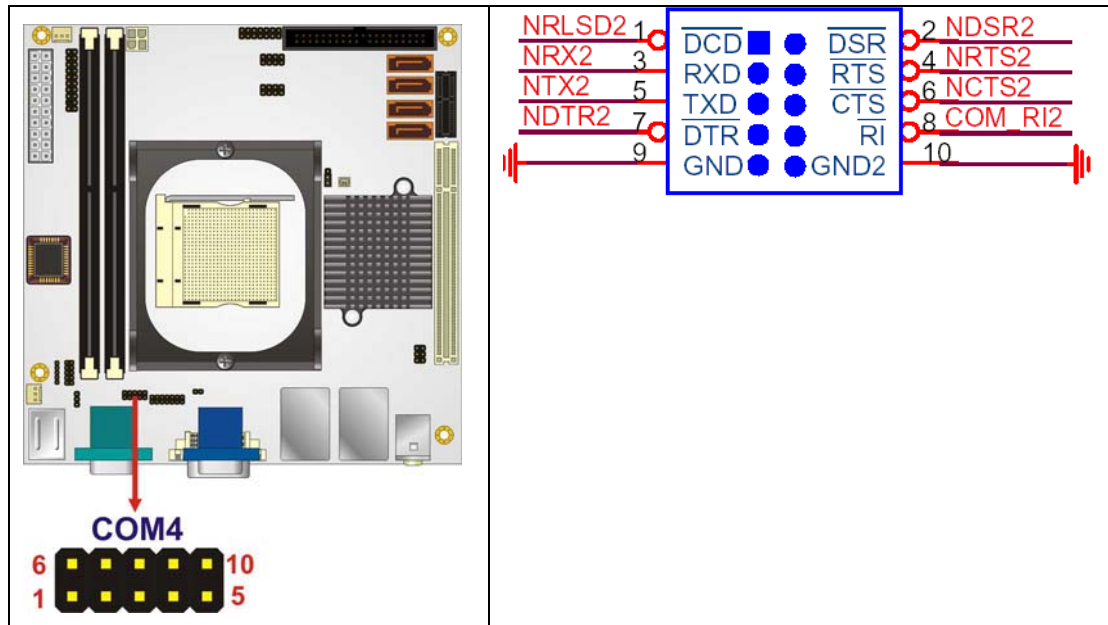


Figure 4-12: Serial Connector Pinout Locations

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	Data Carrier Direct (DCD)	2	Data Set Ready (DSR)
3	Receive Data (RXD)	4	Request To Send (RTS)
5	Transmit Data (TXD)	6	Clear To Send (CTS)
7	Data Terminal Ready (DTR)	8	Ring Indicator (RI)
9	Ground (GND)	10	Ground (GND)

Table 4-13: Serial Connector Pinouts

### 4.2.12 Power Connector


**CN Label:** PWR2

**CN Type:** 4-pin headers (1x4)

**CN Location:** See Figure 4-13

**CN Pinouts:** See Table 4-14

The connector supports the 12V power supply.

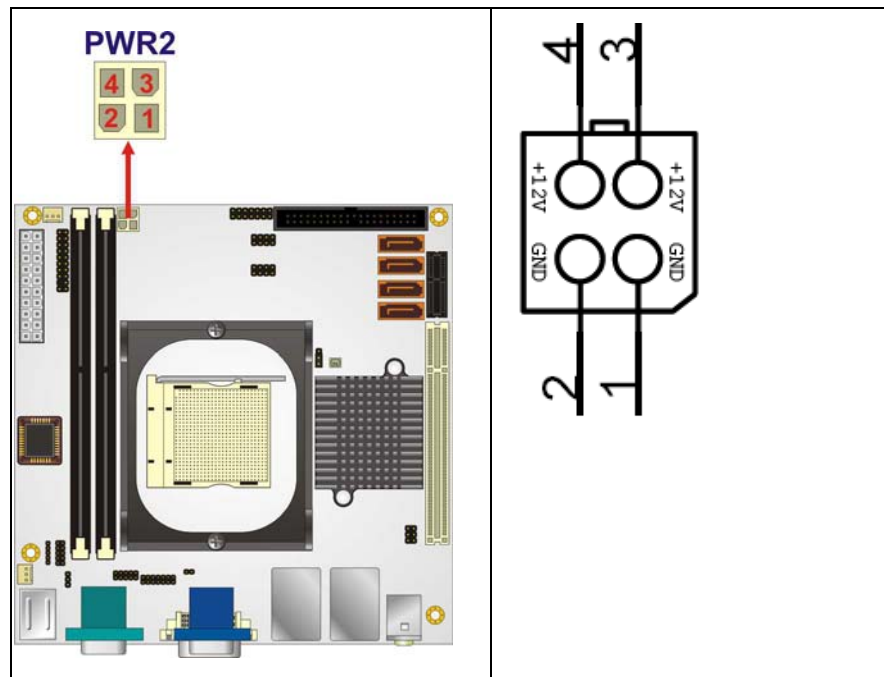

**Figure 4-13: Power Connector Location**

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	GND	2	GND
3	+12V	4	+12V

**Table 4-14: Power Connector Pinouts**

#### 4.2.13 Trusted Platform Module (TPM) Connector

**CN Label:** TPM1

**CN Type:** 20-pin header (2x10)

**CN Location:** See Figure 4-14

**CN Pinouts:** See Table 4-15

## KINO-690AM2 Mini-ITX Motherboard

The Trusted Platform Module (TPM) connector secures the system on bootup. An optional TPM (see packing list in **Chapter 3**) can be connected to the TPM connector.

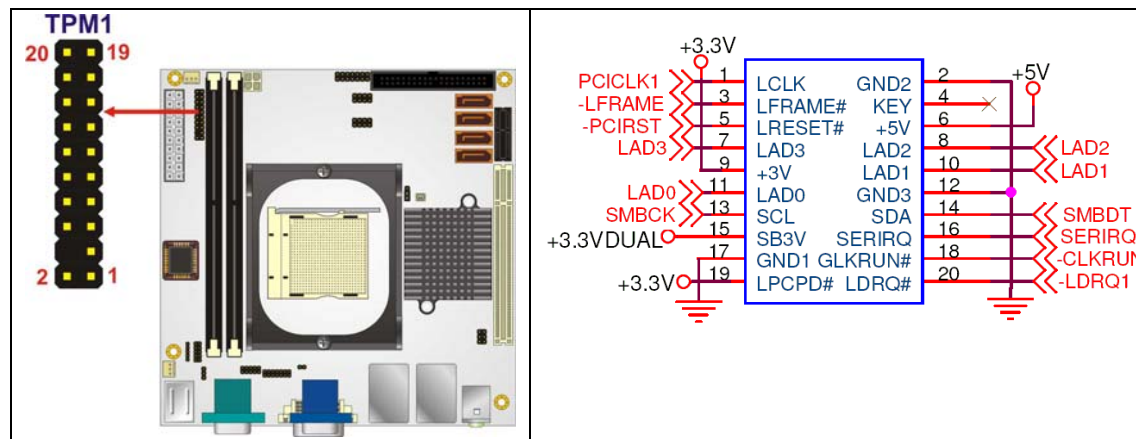


Figure 4-14: TPM Connector Pinout Locations

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	LCLK	2	GND2
3	LFRAME#	4	KEY
5	LRESET#	6	+5V
7	LAD3	8	LAD2
9	+3V	10	LAD1
11	LAD0	12	GND3
13	SCL	14	SDA
15	SB3V	16	SERIRQ
17	GND1	18	GLKRUN#
19	LPCPD#	20	LDRQ#

Table 4-15: TPM Connector Pinouts

### 4.2.14 TV Out Connector

**CN Label:** TV1


**CN Type:** 6-pin header (2x3)

**CN Location:** See Figure 4-15



**CN Pinouts:** See Table 4-16

The 2x3 pin TV out connector connects to a TV output by using an S-Video or RCA connector. The TV out connector makes displaying media data on a television easier.

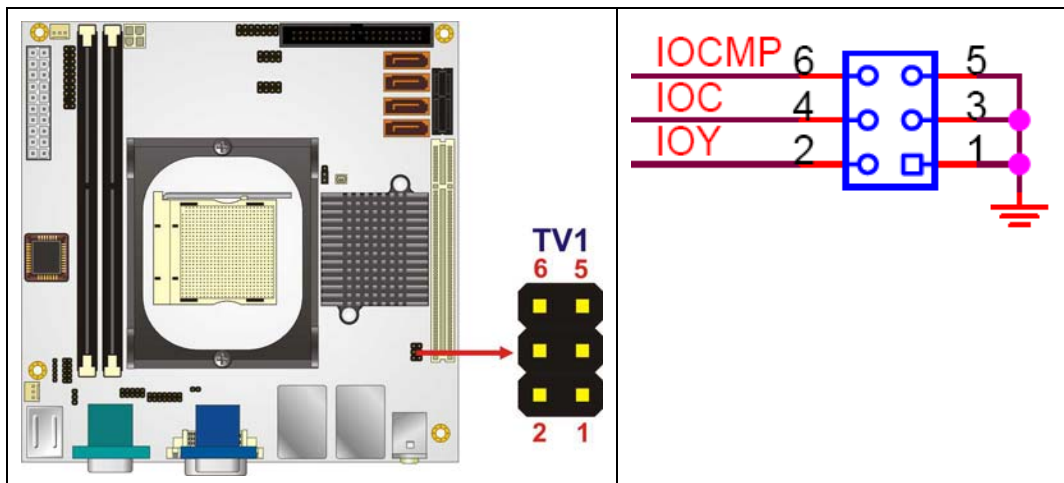

**Figure 4-15: TV Connector Pinout Locations**

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	GND	2	Y
3	GND	4	C
5	GND	6	COMP

**Table 4-16: TV Port Connector Pinouts**

#### 4.2.15 USB Connectors (Internal)

**CN Label:** JUSB1 and JUSB2


**CN Type:** 8-pin header (2x4)

**CN Location:** See Figure 4-16

**CN Pinouts:** See Table 4-17

## KINO-690AM2 Mini-ITX Motherboard

The 2x4 USB pin connectors each provide connectivity to two USB 1.1 or two USB 2.0 ports. Each USB connector can support two USB devices. Additional external USB ports are found on the rear panel. The USB ports are used for I/O bus expansion.

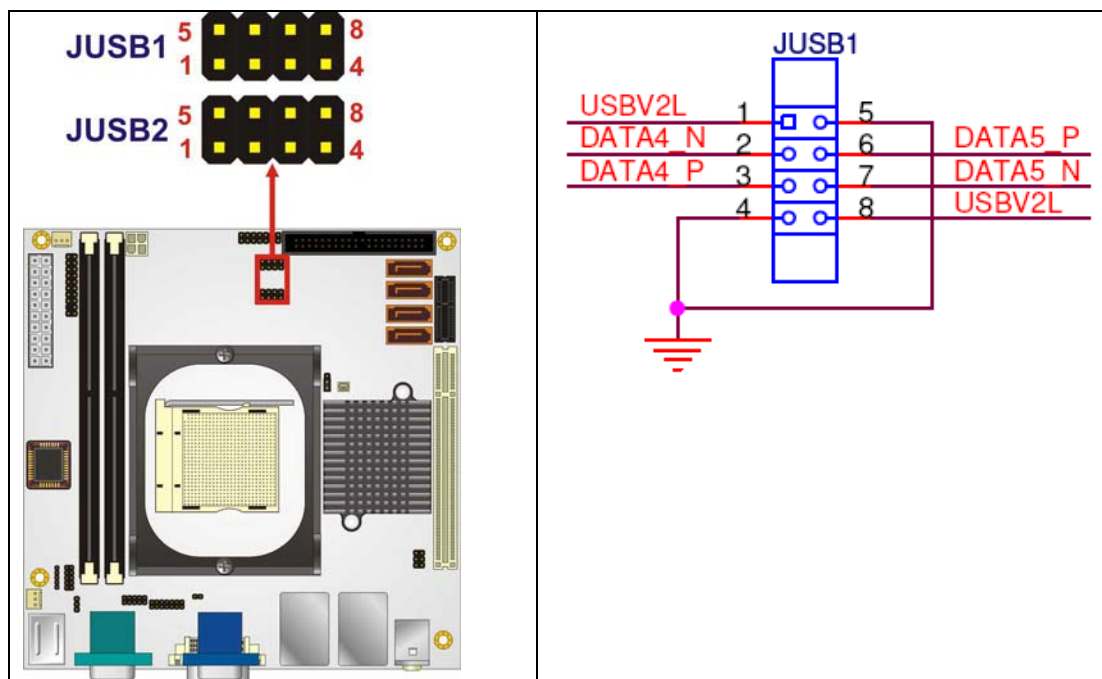

**Figure 4-16: USB Connector Pinout Locations**

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	VCC	5	GND
2	DATA-	6	DATA+
3	DATA+	7	DATA-
4	GND	8	VCC

**Table 4-17: USB Port Connector Pinouts**

### 4.3 External Peripheral Interface Connector Panel

Figure 4-17 shows the KINO-690AM2 external peripheral interface connector (EPIC) panel. The KINO-690AM2 EPIC panel consists of the following:

- 2 x Audio jack connectors
- 1 x DVI connector
- 2 x PS/2 connectors
- 2 x RJ-45 LAN connectors
- 2 x RS-232 serial port connectors
- 4 x USB 2.0 connectors
- 1 x VGA connector

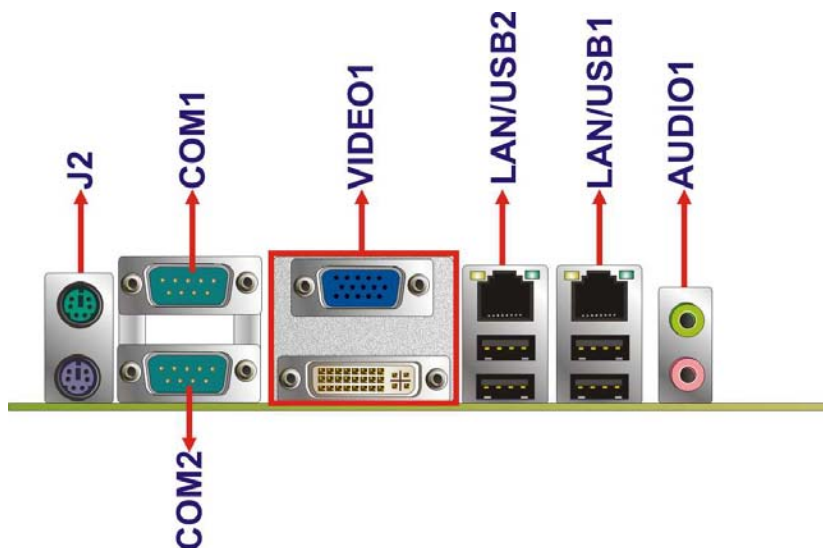


Figure 4-17: KINO-690AM2 External Peripheral Interface Connector

#### 4.3.1 Audio Connector

<b>CN Label:</b>	AUDIO1
<b>CN Type:</b>	2 x audio jacks
<b>CN Location:</b>	See Figure 4-17

## KINO-690AM2 Mini-ITX Motherboard

The two audio jacks on the external audio connector enable the KINO-690AM2 to be connected to external audio devices as specified below.

- **Line Out port (Lime):** Connects to a headphone or a speaker. With multi-channel configurations, this port can also connect to front speakers.
- **Microphone (Pink):** Connects a microphone.



Figure 4-18: Audio Connector


### 4.3.2 DVI and VGA Combo Connector

<b>CN Label:</b>	VIDEO1
<b>CN Type:</b>	DVI-D and DB-15
<b>CN Location:</b>	See Figure 4-17
<b>CN Pinouts:</b>	See Table 4-18 (DVI-D)

A 24-pin Digital Visual Interface (DVI) connector and a female DB-15 VGA connector are integrated into a single EPIC connector as shown in **Figure 4-17**.

The DVI connector connects to high-speed, high-resolution digital displays. The DVI-D connector supports both digital and analog signals. The connector is shown in **Figure 4-19** and the pinouts are shown in **Table 4-18**.

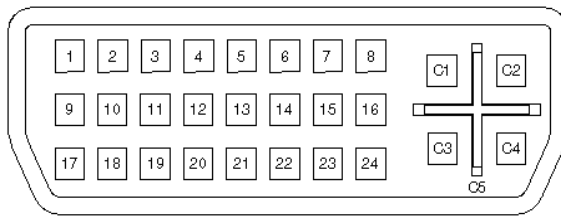



**Figure 4-19: DVI-D Connector Pinouts**

PIN	Signal Name	PIN	Signal Name	PIN	Signal Name
1	TMDS Data2-	9	TMDS Data1-	17	TMDS Data0-
2	TMDS Data2+	10	TMDS Data1+	18	TMDS Data0+
3	GND	11	GND	19	GND
4	N/C	12	NC	20	NC
5	N/C	13	NC	21	NC
6	DDC Clock [SCL]	14	PVDD1	22	GND
7	DDC Data [SDA]	15	GND	23	TMDS Clock +
8	N/C	16	GND	24	TMDS Clock -
C1	N/C	--	--	--	--
C2	N/C	--	--	--	--
C3	N/C	--	--	--	--
C4	N/C	--	--	--	--
C5	N/C	--	--	--	--

**Table 4-18: DVI-D Connector Pinouts**

The female DB-15 VGA connector connects to standard VGA displays. The connector is shown in **Figure 4-20** and the pinouts are shown in **Table 4-19**.


**Figure 4-20: VGA Connector**

## KINO-690AM2 Mini-ITX Motherboard

PIN	DESCRIPTION	PIN	DESCRIPTION
1	RED	2	GREEN
3	BLUE	4	NC
5	GND	6	GND
7	GND	8	GND
9	VCC / NC	10	GND
11	NC	12	DDC DAT
13	HSYNC	14	VSYNC
15	DDCCLK		

Table 4-19: VGA Connector Pinouts

### 4.3.3 Keyboard/Mouse Connector

**CN Label:** J2

**CN Type:** Dual PS/2

**CN Location:** See Figure 4-17

**CN Pinouts:** See Figure 4-21 and Table 4-20

The KINO-690AM2 keyboard and mouse connectors are standard PS/2 connectors.

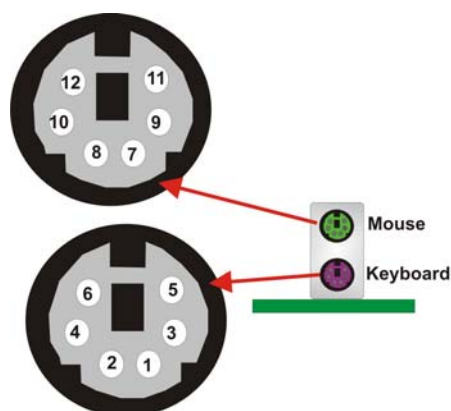


Figure 4-21: PS/2 Pinouts

PIN	DESCRIPTION
1	DATA
2	NC
3	GND
4	VCC5
5	CLK
6	NC

**Table 4-20: PS/2 Connector Pinouts**

#### 4.3.4 LAN and Dual USB Combo Connectors

- CN Label:** LAN/USB1 and LAN/USB2
- CN Type:** RJ-45 and two USB
- CN Location:** See Figure 4-17
- CN Pinouts:** See Table 4-21 and Table 4-23

The KINO-690AM2 is equipped with two built-in RJ-45 GbE controllers. The controllers can connect to the LAN through two RJ-45 LAN connectors. There are two LEDs on the connector indicating the status of LAN. The pin assignments are listed in the following table:

PIN	DESCRIPTION	PIN	DESCRIPTION
1	X0+	2	X0-
3	X1+	4	X2+
5	X2-	6	X1-
7	X3+	8	X3-

**Table 4-21: LAN Pinouts**

## Activity Linked



**Figure 4-22: RJ-45 Ethernet Connector**

The RJ-45 Ethernet connector has two status LEDs, one green and one yellow. The green LED indicates activity on the port and the yellow LED indicates the port is linked. See **Table 4-22**.

STATUS	DESCRIPTION	STATUS	DESCRIPTION
ORANGE	GbE LAN	YELLOW	Linked
GREEN	10/100 LAN		

**Table 4-22: RJ-45 Ethernet Connector LEDs**

The KINO-690AM2 has four external USB 2.0 ports. The ports are integrated into two dual USB and LAN combo connectors. The USB ports connect to both USB 2.0 and USB 1.1 devices.

PIN	DESCRIPTION
1	USBVCC
2	DATA-
3	DATA+
4	USBGND

**Table 4-23: USB Port Pinouts**

### 4.3.5 Serial Port Connectors (COM1 and COM2 )

**CN Label:** COM1 and COM2

**CN Type:** DB-9 connectors

**CN Location:** See Figure 4-17 (see 2)




**CN Pinouts:** See Table 4-24 and Figure 4-23

Two serial port connectors, COM1 and COM2, are externally accessible. The 9-pin DB-9 serial port connectors are connected to RS-232 serial communications devices.

PIN	DESCRIPTION	PIN	DESCRIPTION
1	DCD	6	DSR
2	RX	7	RTS
3	TX	8	CTS
4	DTR	9	RI
5	GND		

**Table 4-24: RS-232 Serial Port Pinouts**



**Figure 4-23: Pinout Locations**

Chapter

**5**

# Installation

---

## 5.1 Anti-static Precautions



### WARNING:

Failure to take ESD precautions during the installation of the KINO-690AM2 may result in permanent damage to the KINO-690AM2 and severe injury to the user.

Electrostatic discharge (ESD) can cause serious damage to electronic components, including the KINO-690AM2. Dry climates are especially susceptible to ESD. It is therefore critical that whenever the KINO-690AM2, or any other electrical component is handled, the following anti-static precautions are strictly adhered to.

- ***Wear an anti-static wristband:*** - Wearing a simple anti-static wristband can help to prevent ESD from damaging the board.
- ***Self-grounding:*** - Before handling the board touch any grounded conducting material. During the time the board is handled, frequently touch any conducting materials that are connected to the ground.
- ***Use an anti-static pad:*** When configuring the KINO-690AM2, place it on an anti-static pad. This reduces the possibility of ESD damaging the KINO-690AM2.
- ***Only handle the edges of the PCB:*** - When handling the PCB, hold the PCB by the edges.

## 5.2 Installation Considerations

---



### NOTE:

The following installation notices and installation considerations should be read and understood before the KINO-690AM2 is installed. All installation notices pertaining to the installation of the KINO-690AM2 should be strictly adhered to. Failing to adhere to these precautions may lead to severe damage of the KINO-690AM2 and injury to the person installing the motherboard.

---

### 5.2.1 Installation Notices

---



### WARNING:

The installation instructions described in this manual should be carefully followed in order to prevent damage to the KINO-690AM2, KINO-690AM2 components and injury to the user.

---

Before and during the installation please **DO** the following:

- Read the user manual:
  - The user manual provides a complete description of the KINO-690AM2 installation instructions and configuration options.
- Wear an electrostatic discharge cuff (ESD):
  - Electronic components are easily damaged by ESD. Wearing an ESD cuff removes ESD from the body and helps prevent ESD damage.
- Place the KINO-690AM2 on an antistatic pad:
  - When installing or configuring the motherboard, place it on an antistatic pad. This helps to prevent potential ESD damage.
- Turn all power to the KINO-690AM2 off:



- When working with the KINO-690AM2, make sure that it is disconnected from all power supplies and that no electricity is being fed into the system.

Before and during the installation of the KINO-690AM2 **DO NOT**:

- Remove any of the stickers on the PCB board. These stickers are required for warranty validation.
- Use the product before verifying all the cables and power connectors are properly connected.
- Allow screws to come in contact with the PCB circuit, connector pins, or its components.

### 5.2.2 Installation Checklist

The following checklist is provided to ensure the KINO-690AM2 is properly installed.

- All the items in the packing list are present
- The CPU is installed
- The CPU cooling kit is properly installed
- A compatible memory module is properly inserted into the slot
- The jumpers have been properly configured
- The KINO-690AM2 is inserted into a chassis with adequate ventilation
- The correct power supply is being used
- The following devices are properly connected
  - Primary and secondary IDE device
  - SATA drives
  - Power supply
  - USB cable
  - Serial port cable
- The following external peripheral devices are properly connected to the chassis:
  - DVI screen
  - Keyboard
  - Mouse
  - LAN
  - VGA screen

## KINO-690AM2 Mini-ITX Motherboard

### 5.3 Unpacking

#### 5.3.1 Unpacking Precautions

When the KINO-690AM2 is unpacked, please do the following:

- Follow the anti-static precautions outlined in **Section 5.1**.
- Make sure the packing box is facing upwards so the KINO-690AM2 does not fall out of the box.
- Make sure all the components in the checklist shown in **Chapter 3** are present.



#### NOTE:

If some of the components listed in the checklist in **Chapter 3** are missing, please do not proceed with the installation. Contact the IEI reseller or vendor you purchased the KINO-690AM2 from or contact an IEI sales representative directly. To contact an IEI sales representative, please send an email to [sales@iei.com.tw](mailto:sales@iei.com.tw).

---

## 5.4 CPU, CPU Cooling Kit and DIMM Installation

---



### **WARNING:**

A CPU should never be turned on without the specified cooling kit being installed. If the cooling kit (heat sink and fan) is not properly installed and the system turned on, permanent damage to the CPU, KINO-690AM2 and other electronic components attached to the system may be incurred. Running a CPU without a cooling kit may also result in injury to the user.

---

The CPU, CPU cooling kit and DIMM are the most critical components of the KINO-690AM2. If one of these components is not installed the KINO-690AM2 cannot run.

### 5.4.1 AMD Socket AM2 CPU Installation

---



### **WARNING:**

CPUs are expensive and sensitive components. When installing the CPU please be careful not to damage it in anyway. Make sure the CPU is installed properly and ensure the correct cooling kit is properly installed.

---

To install a socket AM2 CPU onto the KINO-690AM2, follow the steps below:

---




### **WARNING:**

When handling the CPU, only hold it on the sides. DO NOT touch the pins at the bottom of the CPU.

---

## KINO-690AM2 Mini-ITX Motherboard

- Step 1: Inspect the CPU socket.** Make sure there are no bent pins and make sure the socket contacts are free of foreign material. If any debris is found, remove it with compressed air.
- Step 2: Open the CPU socket lever.** Disengage the load lever by moving the lever slightly outward to clear the retention tab. Rotate the load lever to a fully open position. See **Figure 5-1**.
- Step 3: Orientate the CPU properly.** Make sure the IHS (Integrated Heat Sink) side is facing upward. See **Figure 5-1**.
- Step 4: Correctly position the CPU.** Match the Pin 1 mark with the cut edge on the CPU socket. See **Figure 5-1**.

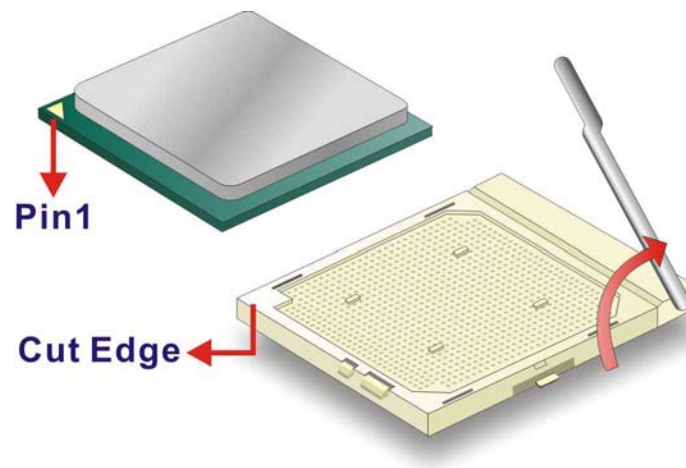

**Figure 5-1: Install the Socket AM2 CPU**

- Step 5: Insert the CPU.** Gently insert the CPU into the socket. If the CPU pins are properly aligned, the CPU should slide into the CPU socket smoothly.
- Step 6: Close the CPU socket.** Re-engage the load lever by pushing it back to its original position. Secure the load lever under the retention tab on the side of CPU socket.



### 5.4.2 Cooling Kit Installation

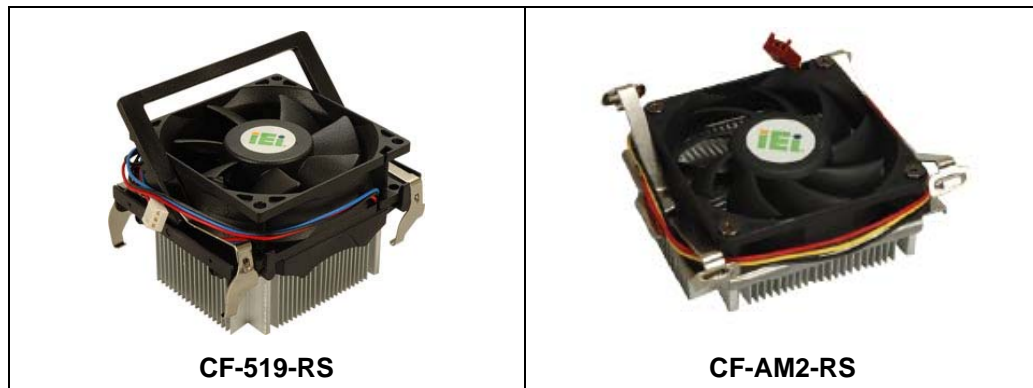


Figure 5-2: IEI Cooling Kit for KINO-690AM2

An IEI AMD Socket AM2 CPU cooling kit (**Figure 5-2**) can be purchased separately. The cooling kit comprises a CPU heat sink and a cooling fan. To install the cooling kit, please follow the steps below.

- Step 1:** Spread a proper amount of thermal paste onto the bottom of the cooling fan heat sink. The thermal paste between the CPU and the heat sink is important for optimum heat dissipation.
- Step 2:** Properly orient the cooling kit. Be sure the cooling kit is properly oriented before installing the cooling kit into the preinstalled cooling kit bracket.
- Step 3:** Install the cooling kit into the preinstalled cooling kit bracket. See **Figure 5-3**.
- Step 4:** Attach the levered mounting clips. Slip the four levered mounting clips into the clip holes on the cooling kit bracket. See **Figure 5-3**.
- Step 5:** Secure the cooling kit in place. Gently push the plastic mounting clip down to lock the cooling kit. See **Figure 5-3**.

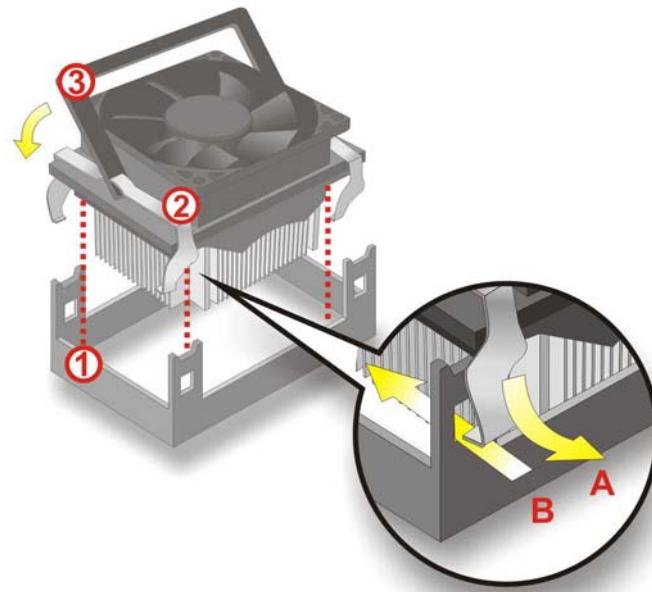


Figure 5-3: Install the CPU cooler

**Step 6: Connect the fan cable.** Connect the cooling kit fan cable to the fan connector on the CPU card. Carefully route the cable and avoid heat generating chips and fan blades.

#### 5.4.3 DIMM Installation




#### **WARNING:**

Using incorrectly specified DIMM may cause permanently damage the KINO-690AM2. Please make sure the purchased DIMM complies with the memory specifications of the KINO-690AM2. DIMM specifications compliant with the KINO-690AM2 are listed in **Chapter 2**.

**WARNING:**

The board supports **DDR2** DIMM modules only. DDR2 and DDR1 are not compatible. If a DDR1 DIMM module is installed, the system may be damaged and become inaccessible. Please only use DDR2 DIMM modules.

To install a DIMM into a DIMM socket, please follow the steps below and refer to **Figure 5-4**.

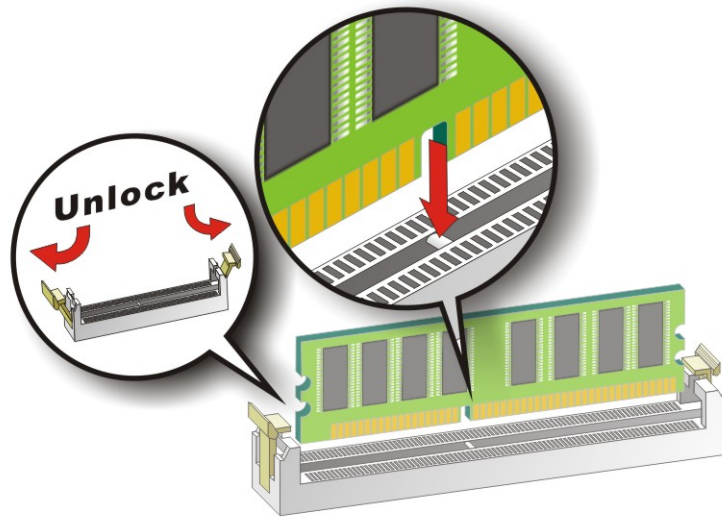

**Figure 5-4: Installing a DIMM**

- Step 1: Open the DIMM socket handles.** The DIMM socket has two handles that secure the DIMM into the socket. Before the DIMM can be inserted into the socket, the handles must be opened. See **Figure 5-4**.
- Step 2: Align the DIMM with the socket.** The DIMM must be oriented in such a way that the notch in the middle of the DIMM must be aligned with the plastic bridge in the socket. See **Figure 5-4**.
- Step 3: Insert the DIMM.** Once properly aligned, the DIMM can be inserted into the socket. As the DIMM is inserted, the white handles on the side of the socket will

## KINO-690AM2 Mini-ITX Motherboard

close automatically and secure the DIMM to the socket. See **Figure 5-4**.


**Step 4: Removing a DIMM.** To remove a DIMM, push both handles outward. The memory module is ejected by a mechanism in the socket.

### 5.5 Jumper Settings



#### NOTE:

A jumper is a metal bridge that is used to close an electrical circuit. It consists of two metal pins and a small metal clip (often protected by a plastic cover) that slides over the pins to connect them. To CLOSE/SHORT a jumper means connecting the pins of the jumper with the plastic clip and to OPEN a jumper means removing the plastic clip from a jumper.

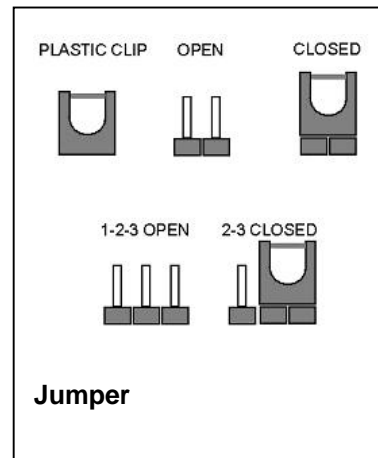

Before the KINO-690AM2 is installed in the system, the jumpers must be set in accordance with the desired configuration. The jumpers on the KINO-690AM2 are listed in **Table 5-1**.

Description	Label	Type
Clear CMOS	JP2	3-pin header
RS-232/485 Setup for COM3	J5	3-pin header
RS-422 termination	JP1	2-pin header

**Table 5-1: Jumpers**

#### 5.5.1 Clear CMOS Jumper

Jumper Label: JP2



<b>Jumper Type:</b>	3-pin header
<b>Jumper Settings:</b>	See Table 5-2
<b>Jumper Location:</b>	See Figure 5-5

If the KINO-690AM2 fails to boot due to improper BIOS settings, the clear CMOS jumper clears the CMOS data and resets the system BIOS information. To do this, use the jumper cap to close pins 2 and 3 for a few seconds then reinstall the jumper clip back to pins 1 and 2.

If the “CMOS Settings Wrong” message is displayed during the boot up process, the fault may be corrected by pressing the F1 to enter the CMOS Setup menu. Do one of the following:

- Enter the correct CMOS setting
- Load Optimal Defaults
- Load Failsafe Defaults.

After having done one of the above, save the changes and exit the CMOS Setup menu. The clear CMOS jumper settings are shown in **Table 5-2**.

Jumper Select	Description	
Short 1 - 2	Keep CMOS Setup	Default
Short 2 - 3	Clear CMOS Setup	

**Table 5-2: Clear CMOS Jumper Settings**

The location of the clear CMOS jumper is shown in **Figure 5-5** below.

## KINO-690AM2 Mini-ITX Motherboard

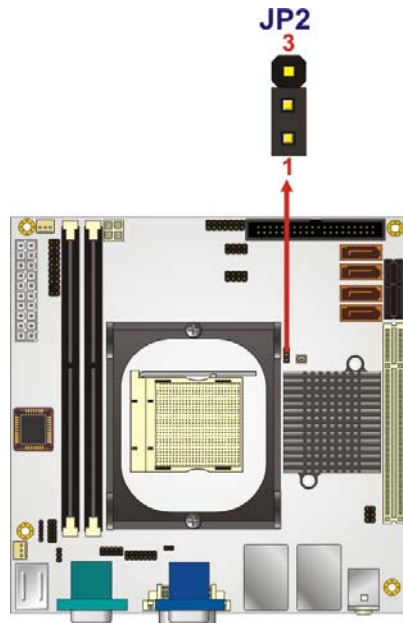


Figure 5-5: Clear CMOS Jumper

### 5.5.2 COM 3 Function Select Jumper


<b>Jumper Label:</b>	J5
<b>Jumper Type:</b>	3-pin header
<b>Jumper Settings:</b>	See Table 5-3
<b>Jumper Location:</b>	See Figure 5-6

The COM3 Function Select jumper sets the communication protocol used by the second serial communications port (COM3) as RS-232, RS-422 or RS-485. The COM3 Function Select settings are shown in **Table 5-3**.

COM 3 Function Select	Description	
Short 1-2	RS-232	Default
Short 2-3	RS-422/485	

Table 5-3: COM3 Function Select Jumper Settings

The COM3 Function Select jumper location is shown in **Figure 5-6**.

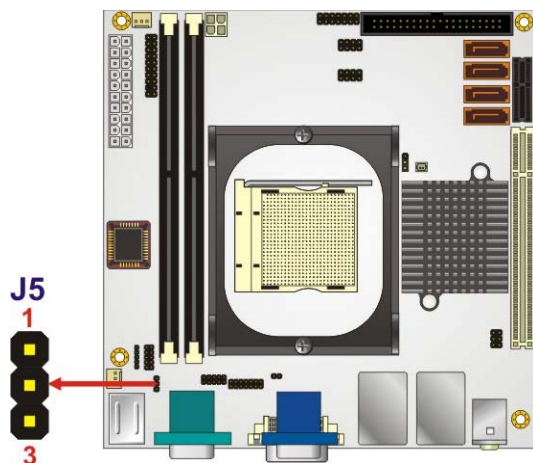

**Figure 5-6: COM3 Function Select Jumper Location**

### 5.5.3 RS-422 Termination Jumper

<b>Jumper Label:</b>	JP1
<b>Jumper Type:</b>	2-pin header
<b>Jumper Settings:</b>	See Table 5-4
<b>Jumper Location:</b>	See Figure 5-7

Use the RS-422 Termination jumper to terminate the RS-422 function. The RS-422 Termination settings are shown in **Table 5-3**.

RS-422 Termination	Description	
Open	Not connected	Default
Close	Connected	

**Table 5-4: RS-422 Termination Jumper Settings**

The RS-422 termination jumper location is shown in **Figure 5-6**.

## KINO-690AM2 Mini-ITX Motherboard

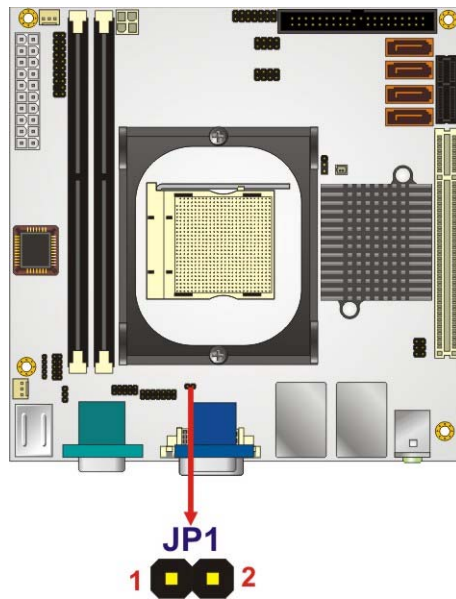


Figure 5-7: RS-422 Termination Jumper Location

## 5.6 Chassis Installation

### 5.6.1 Airflow



#### **WARNING:**

Airflow is critical to the cooling of the CPU and other onboard components. The chassis in which the KINO-690AM2 must have air vents to allow cool air to move into the system and hot air to move out.

The KINO-690AM2 must be installed in a chassis with ventilation holes on the sides allowing airflow to travel through the heat sink surface. In a system with an individual power supply unit, the cooling fan of a power supply can also help generate airflow through the board surface.



## 5.6.2 Motherboard Installation

To install the KINO-690AM2 motherboard into the chassis please refer to the reference material that came with the chassis.

## 5.7 Internal Peripheral Device Connections

### 5.7.1 Peripheral Device Cables

The cables listed in **Table 5-5** are shipped with the KINO-690AM2.

Quantity	Type
1	ATA 66/100 flat cable
1	I/O shield
1	Dual RS-232 cable
2	SATA drive cables
1	SATA drive power cables

**Table 5-5: IEI Provided Cables**

Separately purchased optional IEI items that can be installed are listed below:

- USB cables
- HDTV Cable Set
- RS-232/422/485 cable

For more details about the items listed above, please refer to **Chapter 3**. Installation of the accessories listed above are described in detail below.


### 5.7.2 ATA Flat Cable Connection

The ATA 66/100 flat cable connects to the KINO-690AM2 to one or two IDE devices. To connect an IDE HDD to the KINO-690AM2 please follow the instructions below.

**Step 1:** **Locate the IDE connector.** The location/s of the IDE device connector/s is/are

shown in **Chapter 3**.

**Step 2: Insert the connector.** Connect the IDE cable connector to the onboard connector. See **Figure 5-8**. A key on the front of the cable connector ensures it can only be inserted in one direction.

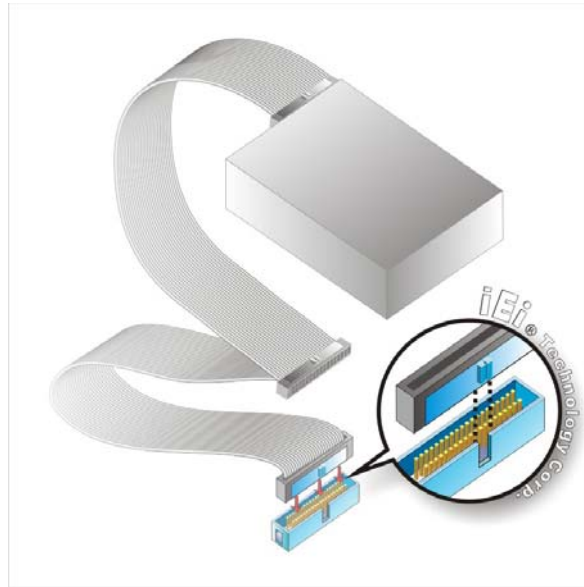

**Figure 5-8: IDE Cable Connection**


**Step 3: Connect the cable to an IDE device.** Connect the two connectors on the other side of the cable to one or two IDE devices. Make sure that pin 1 on the cable corresponds to pin 1 on the connector.

### 5.7.3 Dual RS-232 Cable Connection

The dual RS-232 cable consists of two connectors attached to two independent cables. Each cable is then attached to a D-sub 9 male connector that is mounted onto a bracket. To install the dual RS-232 cable, please follow the steps below.

**Step 1: Locate the connectors.** The locations of the RS-232 connectors are shown in **Chapter 3**.

**Step 2: Insert the cable connectors.** Insert one connector into each serial port box headers. See **Figure 5-9**. A key on the front of the cable connectors ensures the connector can only be installed in one direction.

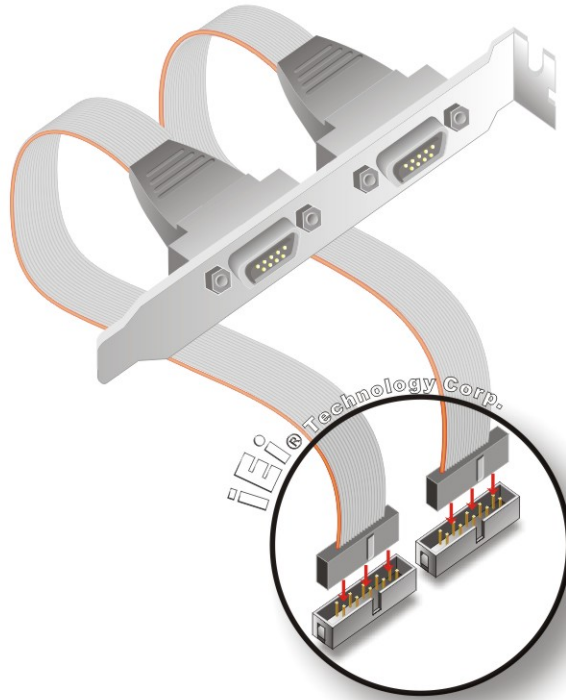

**Figure 5-9: Dual RS-232 Cable Installation**

**Step 3: Secure the bracket.** The dual RS-232 connector has two D-sub 9 male connectors secured on a bracket. To secure the bracket to the chassis please refer to the reference material that came with the chassis

#### 5.7.4 SATA Drive Connection


The KINO-690AM2 is shipped with two SATA drive cables and one SATA drive power cable. To connect the SATA drives to the connectors, please follow the steps below.

**Step 1: Locate the connectors.** The locations of the SATA drive connectors are shown in **Chapter 3**.

**Step 2: Insert the cable connector.** Press the clip on the connector at the end of the

## KINO-690AM2 Mini-ITX Motherboard

SATA cable and insert the cable connector into the onboard SATA drive connector. See **Figure 5-10**.

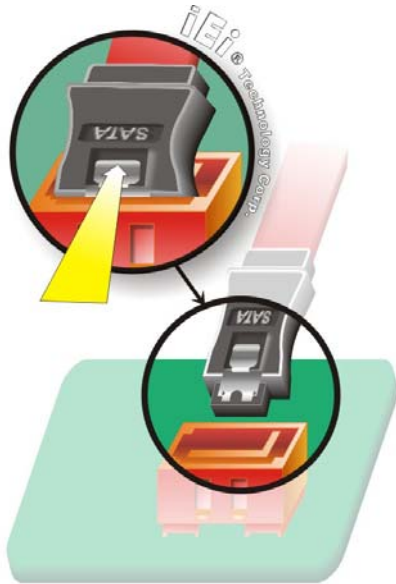

**Figure 5-10: SATA Drive Cable Connection**

**Step 3:** **Connect the cable to the SATA disk.** Connect the connector on the other end of the cable to the connector at the back of the SATA drive. See **Figure 5-11**.

**Step 4:** **Connect the SATA power cable.** Connect the SATA power connector to the back of the SATA drive. See **Figure 5-11**.





Figure 5-11: SATA Power Drive Connection

### 5.7.5 USB Cable (Dual Port)

The KINO-690AM2 is shipped with a dual port USB 2.0 cable. To connect the USB cable connector, please follow the steps below.

**Step 1: Locate the connectors.** The locations of the USB connectors are shown in Chapter 3.




#### **WARNING:**

If the USB pins are not properly aligned, the USB device can burn out.

**Step 2: Align the connectors.** The cable has two connectors. Correctly align pin 1 on each cable connector with pin 1 on the KINO-690AM2 USB connector.

**Step 3: Insert the cable connectors.** Once the cable connectors are properly aligned with the USB connectors on the KINO-690AM2, connect the cable connectors to the onboard connectors. See **Figure 5-12**.

## KINO-690AM2 Mini-ITX Motherboard

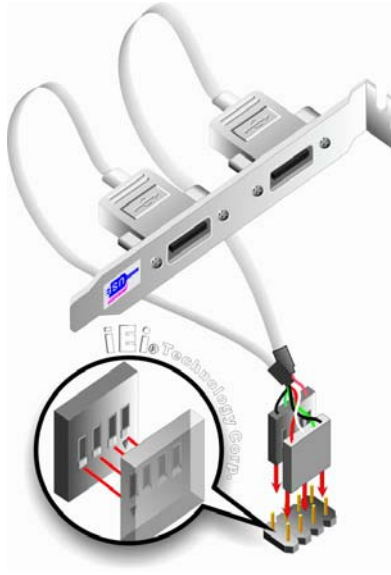

**Figure 5-12: Dual USB Cable Connection**

**Step 4:** **Attach the bracket to the chassis.** The USB 2.0 connectors are attached to a bracket. To secure the bracket to the chassis please refer to the installation instructions that came with the chassis.

### 5.7.6 USB Cable (Four Port)

Four port USB 2.0 cables can be separately purchased from IEI. To install a four port USB cable onto the KINO-690AM2, please follow the steps below.

**Step 1:** **Locate the connectors.** The locations of the USB connectors are shown in Chapter 4.




#### **WARNING:**

If the USB pins are not properly aligned, the USB device can burn out.

**Step 2:** **Align the connectors.** Each cable has two connectors. Correctly align pin 1 on each cable connector with pin 1 on the KINO-690AM2 USB connectors.

**Step 3:** Insert the cable connectors. Once the cable connectors are properly aligned with the USB connectors on the KINO-690AM2, connect the cable connectors to the onboard connectors. See **Figure 5-13**.

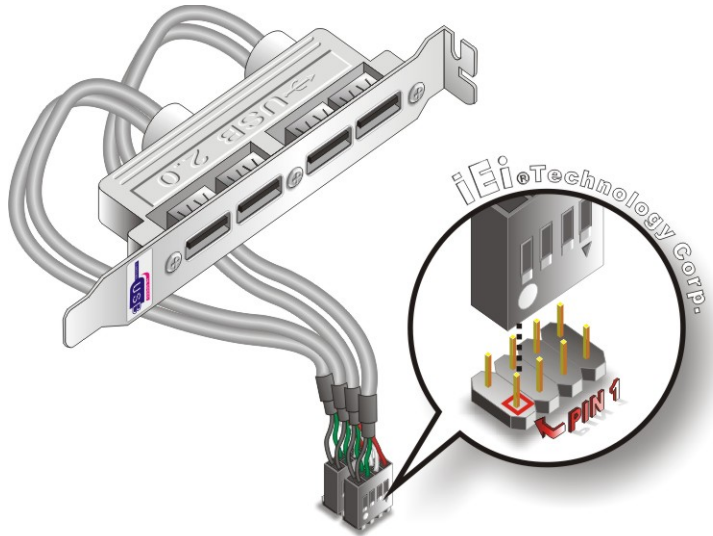

**Figure 5-13: Four Port USB Cable Connection**

**Step 4:** Attach the bracket to the chassis. The USB 2.0 connectors are attached to a bracket. To secure the bracket to the chassis please refer to the installation instructions that came with the chassis.

## 5.8 External Peripheral Interface Connection

The following external peripheral devices can be connected to the external peripheral interface connectors.

- Audio jacks
- DVI display
- PS/2 keyboard and mouse
- RJ-45 Ethernet cable connectors
- Serial ports
- USB ports
- VGA screen

## KINO-690AM2 Mini-ITX Motherboard

To install these devices, connect the corresponding cable connector from the actual device to the corresponding KINO-690AM2 external peripheral interface connector making sure the pins are properly aligned.

### 5.8.1 Audio Connection

Audio signals are interfaced through two phone jack connections. The red phone jack is for Mic In and green is for Speaker Out. Follow the steps below to connect audio devices to the KINO-690AM2.

**Step 1: Locate the audio phone jacks.** The location of the audio phone jacks are shown in **Chapter 3**.

**Step 2: Insert audio phone jack plugs.** Insert audio phone jack plugs into the audio phone jacks on the external peripheral interface. See **Figure 5-14**.

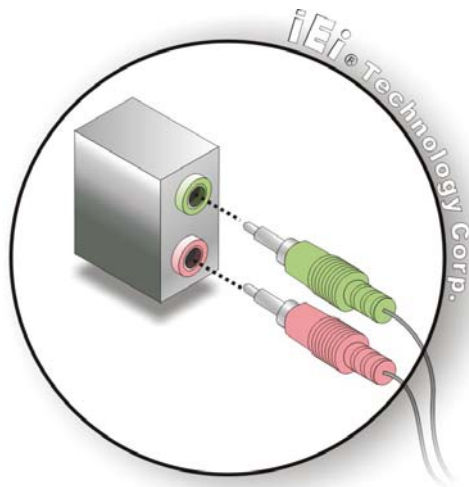


Figure 5-14: Audio Connectors

### 5.8.2 DVI Display Device Connection

The KINO-690AM2 has a single female DVI connector on the external peripheral interface panel. The DVI connector is connected to a digital display device. To connect a digital display device to the KINO-690AM2, please follow the instructions below.


**Step 1: Locate the DVI connector.** The location of the DVI connector is shown in



## Chapter 2.

**Step 2: Align the DVI connector.** Align the male DVI connector on the digital display device cable with the female DVI connector on the external peripheral interface.

**Step 3: Insert the DVI connector** Once the connectors are properly aligned with the male connector, insert the male connector from the digital display device into the female connector on the KINO-690AM2. See **Figure 5-15**.

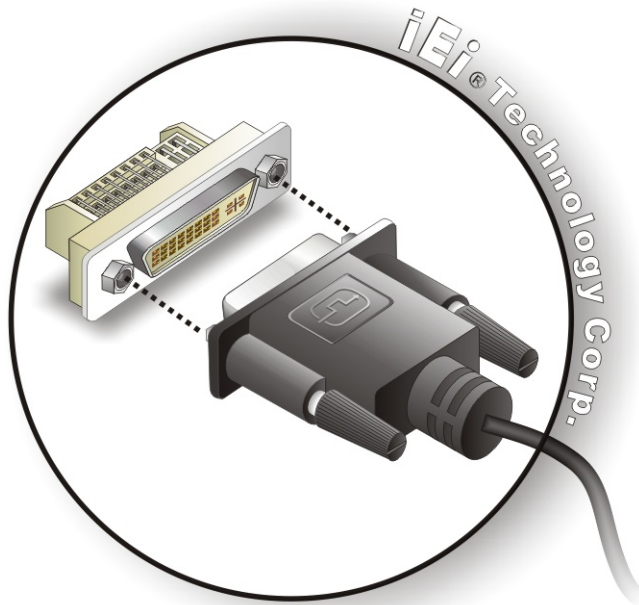

**Figure 5-15: DVI Connector**

**Step 4: Secure the connector.** Secure the DVI connector from the digital display device to the external interface by tightening the two retention screws on either side of the connector.

### 5.8.3 LAN Connection (Single Connector)

There are two external RJ-45 LAN connectors. The RJ-45 connectors enable connection to an external network. To connect a LAN cable with an RJ-45 connector, please follow the instructions below.

## KINO-690AM2 Mini-ITX Motherboard

**Step 1:** Locate the RJ-45 connectors. The locations of the USB connectors are shown in **Chapter 4**.

**Step 2:** Align the connectors. Align the RJ-45 connector on the LAN cable with one of the RJ-45 connectors on the KINO-690AM2. See **Figure 5-16**.

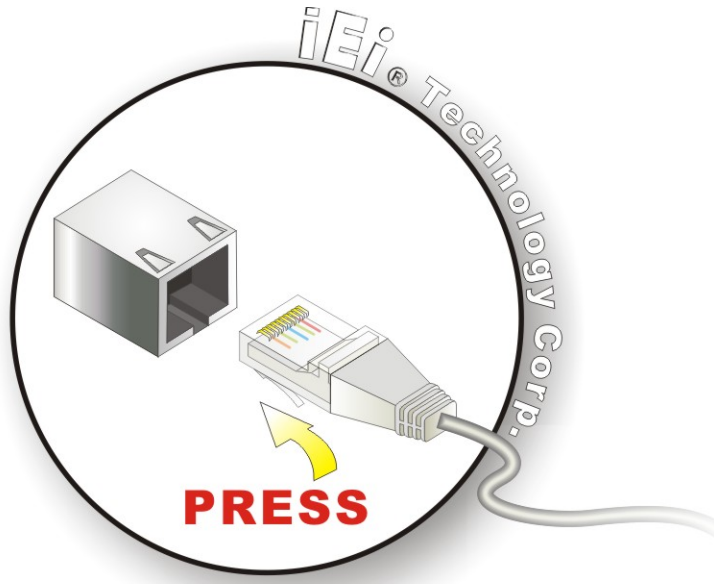


Figure 5-16: LAN Connection

**Step 3:** Insert the LAN cable RJ-45 connector. Once aligned, gently insert the LAN cable RJ-45 connector into the onboard RJ-45 connector.


### 5.8.4 PS/2 Keyboard and Mouse Connection

The KINO-690AM2 has a dual PS/2 connector on the external peripheral interface panel. The dual PS/2 connector is used to connect to a keyboard and mouse to the system. Follow the steps below to connect a keyboard and mouse to the KINO-690AM2.

**Step 1:** Locate the dual PS/2 connector. The location of the dual PS/2 connector is shown in **Chapter 3**.

**Step 2:** Insert the keyboard/mouse connector. Insert a PS/2 keyboard or mouse connector into the appropriate PS/2 connector on the external peripheral

interface connector. See **Figure 5-17**.

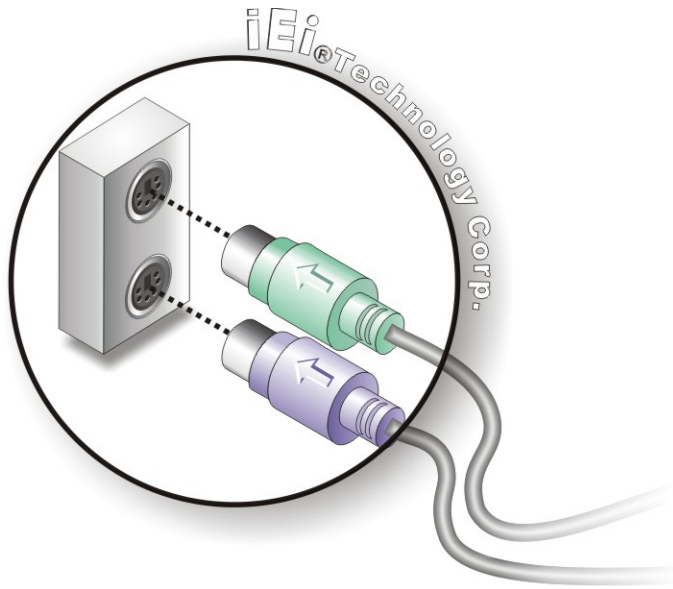

**Figure 5-17: PS/2 Keyboard/Mouse Connector**

### 5.8.5 Serial Device Connection

The KINO-690AM2 has a single female DB-9 connector on the external peripheral interface panel for a serial device. Follow the steps below to connect a serial device to the KINO-690AM2.

**Step 1:** **Locate the DB-9 connector.** The location of the DB-9 connector is shown in **Chapter 3**.

**Step 2:** **Insert the serial connector.** Insert the DB-9 connector of a serial device into the DB-9 connector on the external peripheral interface. See **Figure 5-18**.

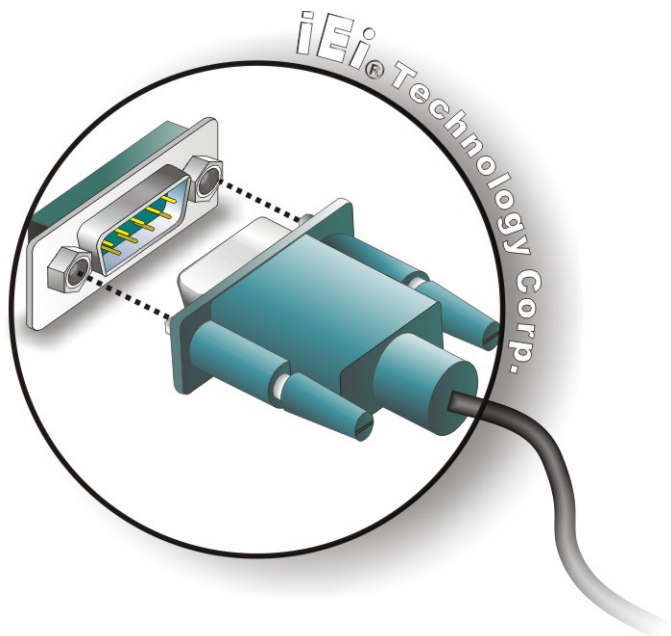


Figure 5-18: Serial Device Connector

**Step 3: Secure the connector.** Secure the serial device connector to the external interface by tightening the two retention screws on either side of the connector.

### 5.8.6 USB Connection (Dual Connector)

The external USB Series "A" receptacle connectors provide easier and quicker access to external USB devices. Follow the steps below to connect USB devices to the KINO-690AM2.

**Step 1: Locate the USB Series "A" receptacle connectors.** The location of the USB Series "A" receptacle connectors are shown in **Chapter 3**.

**Step 2: Insert a USB Series "A" plug.** Insert the USB Series "A" plug of a device into the USB Series "A" receptacle on the external peripheral interface. See Figure 5-19.



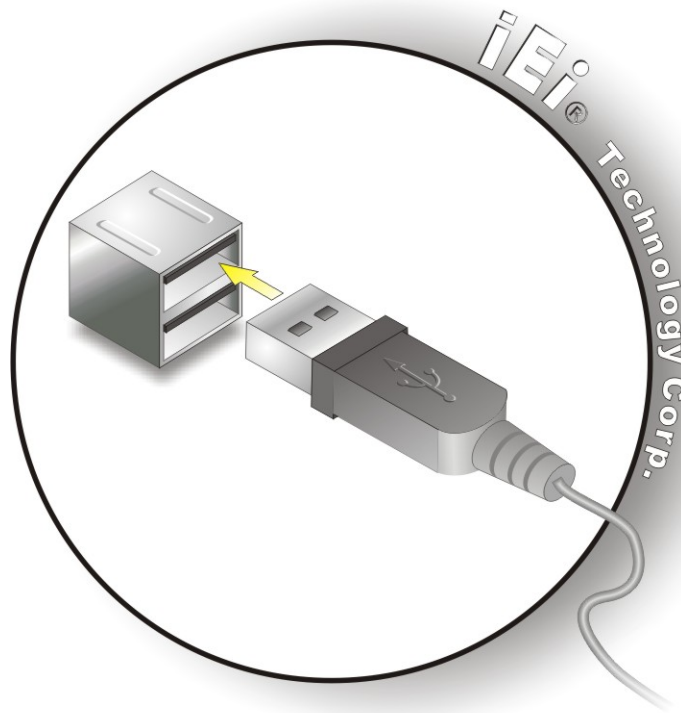


Figure 5-19: USB Connector

### 5.8.7 VGA Monitor Connection

The KINO-690AM2 has a single female DB-15 connector on the external peripheral interface panel. The DB-15 connector is connected to a CRT or VGA monitor. To connect a monitor to the KINO-690AM2, please follow the instructions below.

- Step 1:** **Locate the female DB-15 connector.** The location of the female DB-15 connector is shown in **Chapter 3**.
- Step 2:** **Align the VGA connector.** Align the male DB-15 connector on the VGA screen cable with the female DB-15 connector on the external peripheral interface.
- Step 3:** **Insert the VGA connector** Once the connectors are properly aligned with the insert the male connector from the VGA screen into the female connector on the KINO-690AM2. See **Figure 5-20**.

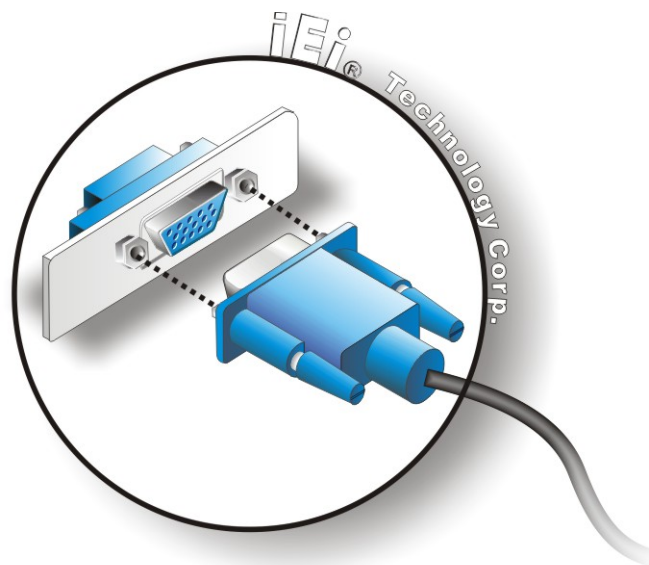


Figure 5-20: VGA Connector

**Step 4: Secure the connector.** Secure the DB-15 VGA connector from the VGA monitor to the external interface by tightening the two retention screws on either side of the connector.



**THIS PAGE IS INTENTIONALLY LEFT BLANK**

Chapter

6

# BIOS Screens

---



## 6.1 Introduction

A licensed copy of AMI BIOS is preprogrammed into the ROM BIOS. The BIOS setup program allows users to modify the basic system configuration. This chapter describes how to access the BIOS setup program and the configuration options that may be changed.

### 6.1.1 Starting Setup

The AMI BIOS is activated when the computer is turned on. The setup program can be activated in one of two ways.

1. Press the **DELETE** key as soon as the system is turned on or
2. Press the **DELETE** key when the “**Press Del to enter SETUP**” message appears on the screen.

If the message disappears before the **DELETE** key is pressed, restart the computer and try again.

### 6.1.2 Using Setup

Use the arrow keys to highlight items, press **ENTER** to select, use the PageUp and PageDown keys to change entries, press **F1** for help and press **Esc** to quit. Navigation keys are shown in.

Key	Function
Up arrow	Move to previous item
Down arrow	Move to next item
Left arrow	Move to the item on the left hand side
Right arrow	Move to the item on the right hand side
Esc key	Main Menu – Quit and not save changes into CMOS Status Page Setup Menu and Option Page Setup Menu -- Exit current page and return to Main Menu
Page Up key	Increase the numeric value or make changes
Page Dn key	Decrease the numeric value or make changes

## KINO-690AM2 Mini-ITX Motherboard

F1 key	General help, only for Status Page Setup Menu and Option Page Setup Menu
F2 /F3 key	Change color from total 16 colors. F2 to select color forward.
F10 key	Save all the CMOS changes, only for Main Menu

Table 6-1: BIOS Navigation Keys

### 6.1.3 Getting Help

When **F1** is pressed a small help window describing the appropriate keys to use and the possible selections for the highlighted item appears. To exit the Help Window press **Esc** or the **F1** key again.

### 6.1.4 Unable to Reboot After Configuration Changes

If the computer cannot boot after changes to the system configuration is made, CMOS defaults. Use the jumper described in **Chapter 5**.

### 6.1.5 BIOS Menu Bar

The **menu bar** on top of the BIOS screen has the following main items:


- **Main** Changes the basic system configuration.
- **Advanced** Changes the advanced system settings.
- **PCIPnP** Changes the advanced PCI/PnP Settings
- **Boot** Changes the system boot configuration.
- **Security** Sets User and Supervisor Passwords.
- **Chipset** Changes the chipset settings.
- **Power** Changes power management settings.
- **Exit** Selects exit options and loads default settings

The following sections completely describe the configuration options found in the menu items at the top of the BIOS screen and listed above.

## 6.2 Main

The **Main** BIOS menu (**BIOS Menu 1**) appears when the **BIOS Setup** program is entered.

The **Main** menu gives an overview of the basic system information.

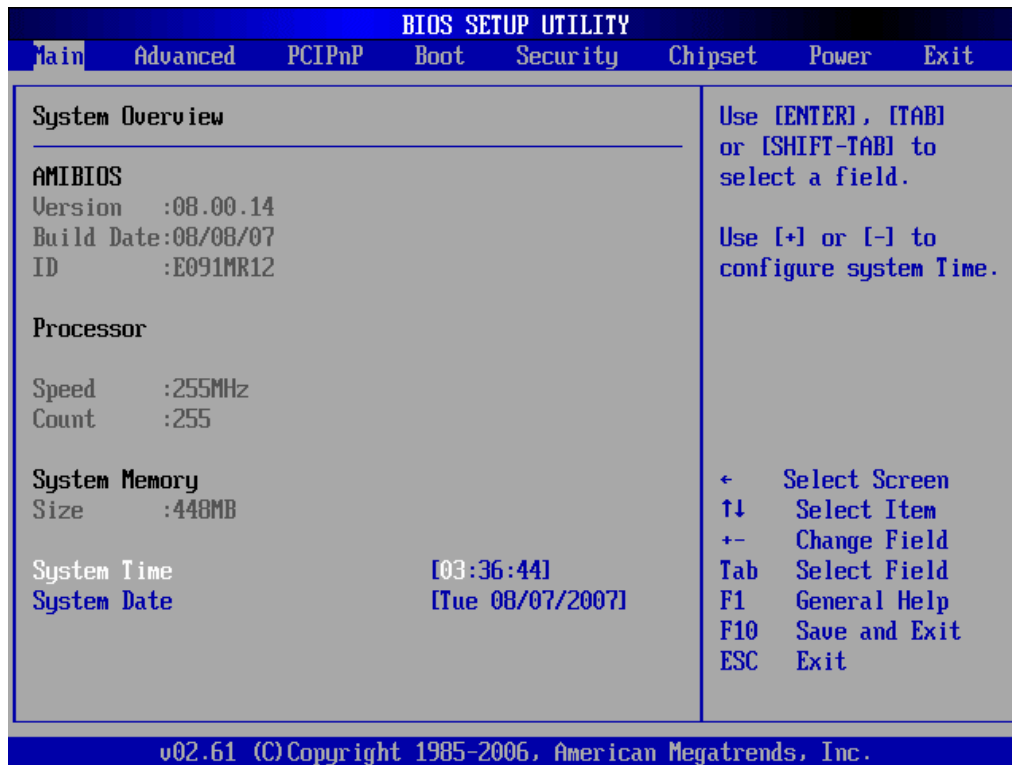

**BIOS Menu 1: Main**

### → System Overview

The **System Overview** lists a brief summary of different system components. The fields in

**System Overview** cannot be changed. The items shown in the system overview include:

- **AMI BIOS:** Displays auto-detected BIOS information
  - **Version:** Current BIOS version
  - **Build Date:** Date the current BIOS version was made
  - **ID:** Installed BIOS ID
- **Processor:** Displays auto-detected CPU specifications
  - **Type:** Names the currently installed processor
  - **Speed:** Lists the processor speed

## KINO-690AM2 Mini-ITX Motherboard

- **Count:** The number of CPUs on the motherboard
- **System Memory:** Displays the auto-detected system memory.
  - **Size:** Lists memory size

The **System Overview** field also has two user configurable fields:

➔ **System Time [xx:xx:xx]**

Use the **System Time** option to set the system time. Manually enter the hours, minutes and seconds.

➔ **System Date [xx/xx/xx]**

Use the **System Date** option to set the system date. Manually enter the day, month and year.

## 6.3 Advanced

Use the **Advanced** menu (**BIOS Menu 2**) to configure the CPU and peripheral devices through the following sub-menus:




### WARNING:

Setting the wrong values in the sections below may cause the system to malfunction. Make sure that the settings made are compatible with the hardware.

---

- **CPU Configuration** (see **Section 6.3.1**)
- **IDE Configuration** (see **Section 6.3.2**)
- **SuperIO Configuration** (see **Section 6.3.3**)
- **Hardware Health Configuration** (see **Section 6.3.4**)
- **ACPI Configuration** (see **Section 6.3.5**)
- **Trusted Computing** (see **Section 6.3.6**)
- **Remote Access Configuration** (see **Section 6.3.7**)
- **USB Configuration** (see **Section 6.3.8**)



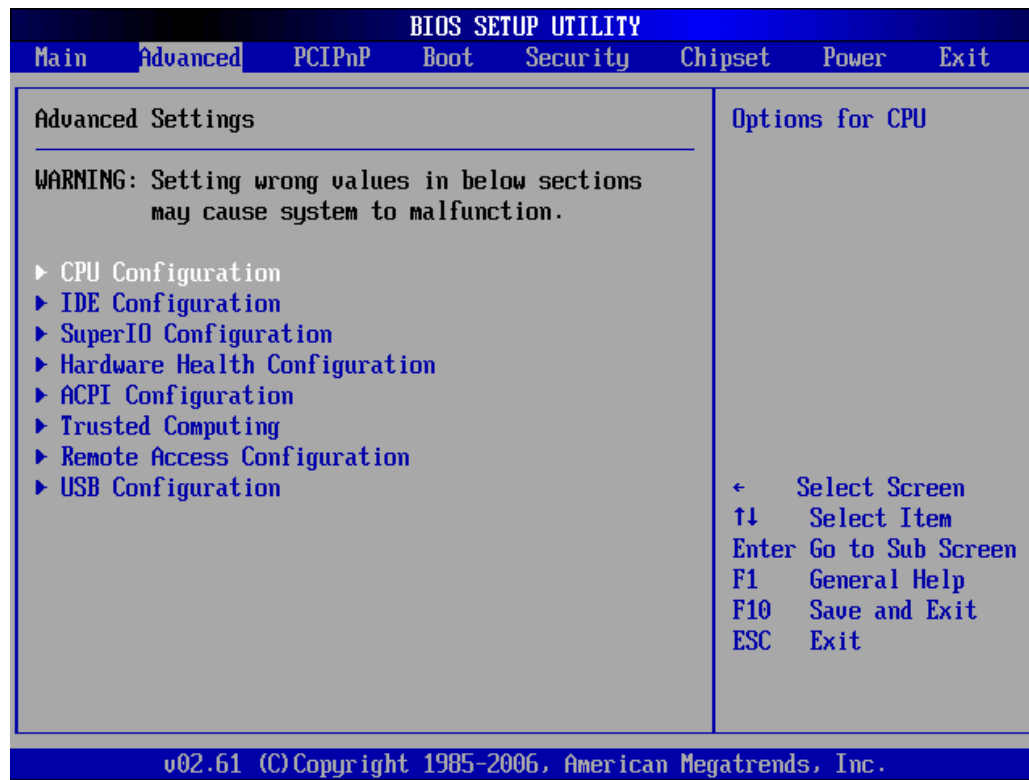


## BIOS Menu 2: Advanced

### 6.3.1 CPU Configuration

Use the **CPU Configuration** menu (**BIOS Menu 3**) to view detailed CPU specifications and configure the CPU.

## KINO-690AM2 Mini-ITX Motherboard

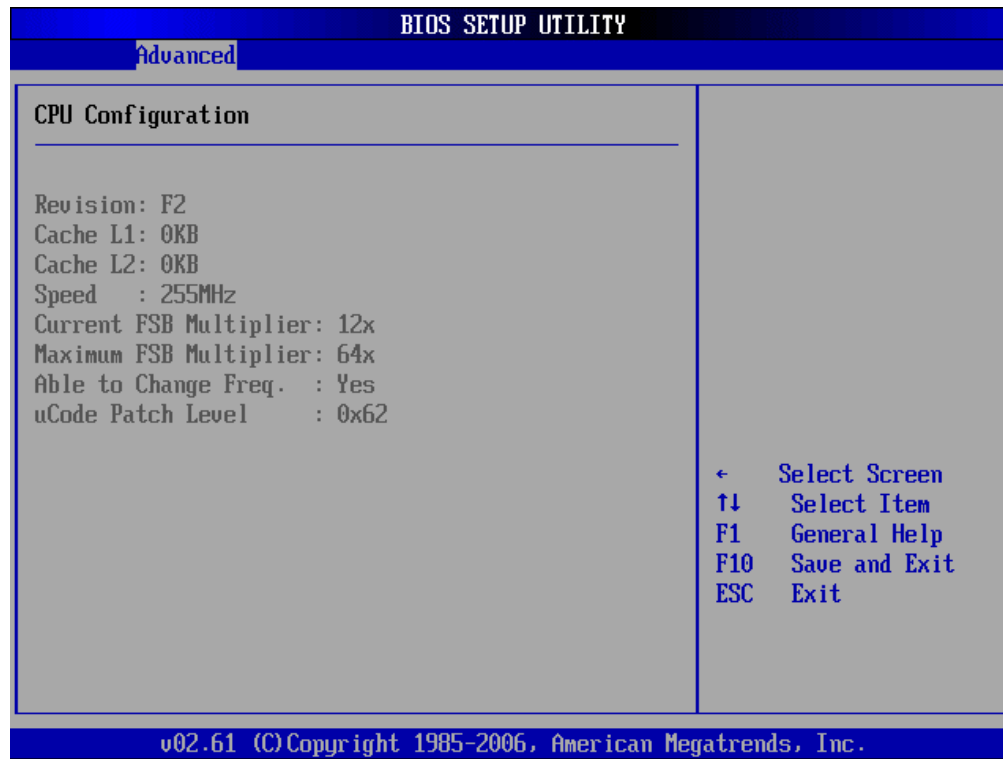
**BIOS Menu 3: CPU Configuration**

The CPU Configuration menu (BIOS Menu 3) lists the following CPU details:

- **Revision:** Lists the CPU revision number
- **Cache L1:** Lists the CPU L1 cache size
- **Cache L2:** Lists the CPU L2 cache size
- **Speed:** Lists the CPU processing speed
- **Current FSB Multiplier:** Specifies how much the FSB is increased by
- **Maximum FSB Multiplier:** Specifies the maximum the FSB can be increased
- **Able to Change Freq:** Specifies the CPU frequency cannot be changed.
- **uCode Patch Level**

### 6.3.2 IDE Configuration

Use the **IDE Configuration** menu (**BIOS Menu 4**) to change and/or set the configuration of the IDE devices installed in the system.

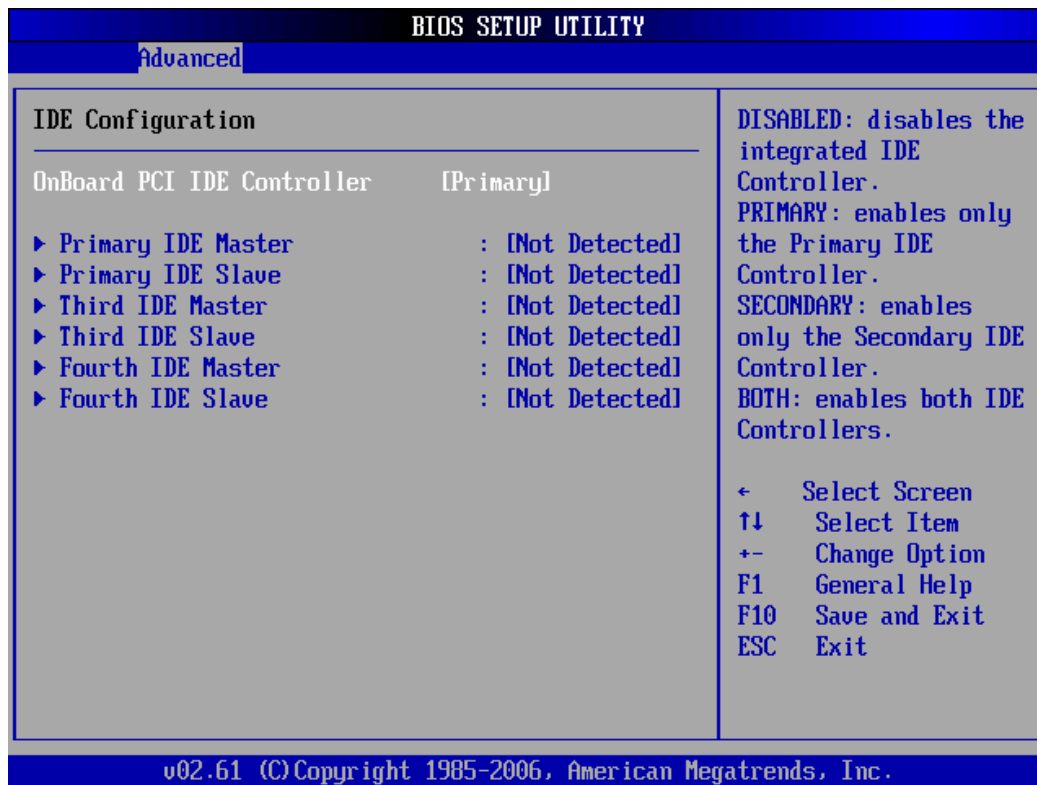

#### BIOS Menu 4: IDE Configuration

##### ➔ OnBoard PCI IDE Controller [Primary]

The **OnBoard PCI IDE Controller** BIOS option specifies the IDE channels used by the onboard PCI IDE controller. The following configuration options are available.

- ➔ **Disabled** Prevents the system from using the onboard IDE controller
- ➔ **Primary** **DEFAULT** Only allows the system to detect the Primary IDE channel, including both the Primary Master and Primary

Slave)

### → IDE Master and IDE Slave

When entering setup, BIOS auto detects the presence of IDE devices. BIOS displays the status of the auto detected IDE devices. The following IDE devices are detected and are shown in the **IDE Configuration** menu:


- Primary IDE Master
- Primary IDE Slave
- Secondary IDE Master
- Secondary IDE Slave

The **IDE Configuration** menu (**BIOS Menu 4**) allows changes to the configurations for the IDE devices installed in the system. If an IDE device is detected, and one of the above listed four BIOS configuration options are selected, the IDE configuration options shown in **Section 6.3.2.1** appear.

### 6.3.2.1 IDE Master, IDE Slave

Use the **IDE Master** and **IDE Slave** configuration menu to view both primary and secondary IDE device details and configure the IDE devices connected to the system.



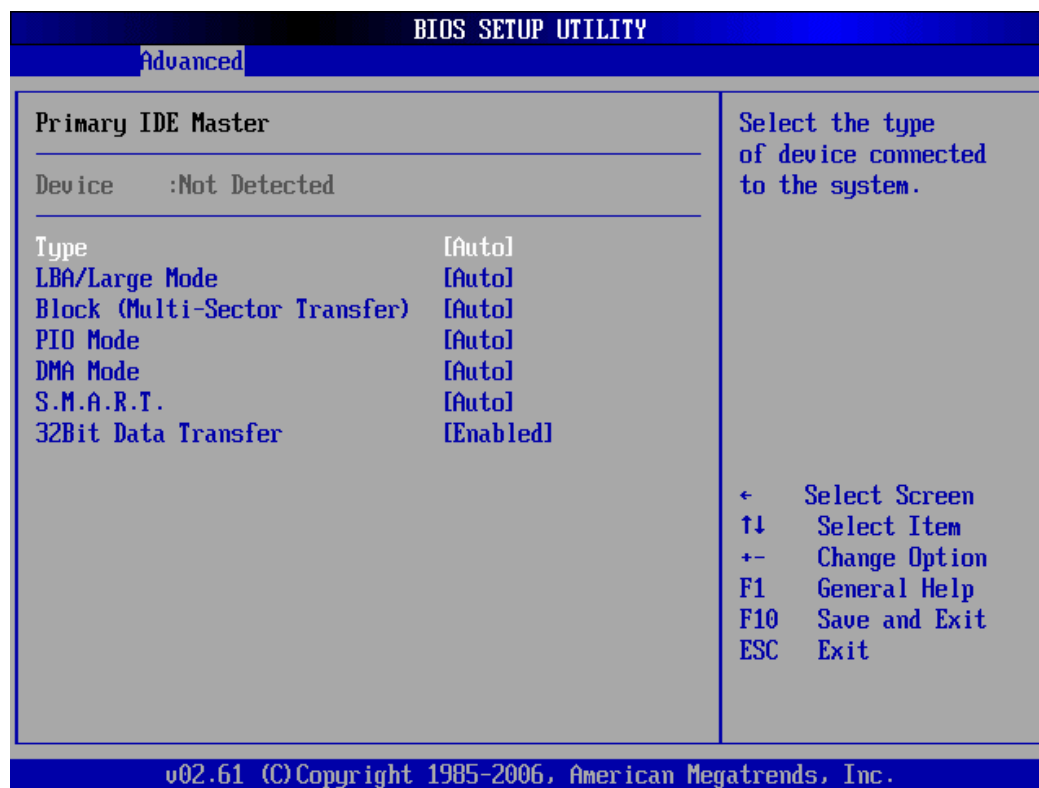

#### BIOS Menu 5: IDE Master and IDE Slave Configuration

##### ➔ Auto-Detected Drive Parameters

The "grayed-out" items in the left frame are IDE disk drive parameters automatically detected from the firmware of the selected IDE disk drive. The drive parameters are listed as follows:

- **Device:** Lists the device type (e.g. hard disk, CD-ROM etc.)
- **Type:** Indicates the type of devices a user can manually select
- **Vendor:** Lists the device manufacturer
- **Size:** List the storage capacity of the device.
- **LBA Mode:** Indicates whether the LBA (Logical Block Addressing) is a method of addressing data on a disk drive is supported or not.
- **Block Mode:** Block mode boosts IDE drive performance by increasing the amount of data transferred. Only 512 bytes of data can be transferred per interrupt if block mode is not used. Block mode allows transfers of up to 64 KB per interrupt.

## KINO-690AM2 Mini-ITX Motherboard

- **PIO Mode:** Indicates the PIO mode of the installed device.
- **Async DMA:** Indicates the highest Asynchronous DMA Mode that is supported.
- **Ultra DMA:** Indicates the highest Synchronous DMA Mode that is supported.
- **S.M.A.R.T.:** Indicates whether or not the Self-Monitoring Analysis and Reporting Technology protocol is supported.
- **32Bit Data Transfer:** Enables 32-bit data transfer.

### → Type [Auto]

Use the **Type** BIOS option select the type of device the AMIBIOS attempts to boot from after the Power-On Self-Test (POST) is complete.

- |   |                            |   |
|---|----------------------------|---|
| → | <b>Not Installed</b>       | BIOS is prevented from searching for an IDE disk drive on the specified channel.  |
| → | <b>Auto</b> <b>DEFAULT</b> | The BIOS auto detects the IDE disk drive type attached to the specified channel. This setting should be used if an IDE hard disk drive is attached to the specified channel.                    |
| → | <b>CD/DVD</b>              | The CD/DVD option specifies that an IDE CD-ROM drive is attached to the specified IDE channel. The BIOS does not attempt to search for other types of IDE disk drives on the specified channel. |
| → | <b>ARMD</b>                | This option specifies an ATAPI Removable Media Device. These include, but are not limited to:   |

→ **ZIP**

→ **LS-120**

➔ **LBA/Large Mode [Auto]**

Use the **LBA/Large Mode** option to disable or enable BIOS to auto detects LBA (Logical Block Addressing). LBA is a method of addressing data on a disk drive. In LBA mode, the maximum drive capacity is 137 GB.

- ➔ **Disabled** BIOS is prevented from using the LBA mode control on the specified channel.
- ➔ **Auto** **DEFAULT** BIOS auto detects the LBA mode control on the specified channel.

➔ **Block (Multi Sector Transfer) [Auto]**

Use the **Block (Multi Sector Transfer)** to disable or enable BIOS to auto detect if the device supports multi-sector transfers.

- ➔ **Disabled** BIOS is prevented from using Multi-Sector Transfer on the specified channel. The data to and from the device occurs one sector at a time.
- ➔ **Auto** **DEFAULT** BIOS auto detects Multi-Sector Transfer support on the drive on the specified channel. If supported the data transfer to and from the device occurs multiple sectors at a time.

➔ **PIO Mode [Auto]**

Use the **PIO Mode** option to select the IDE PIO (Programmable I/O) mode program timing cycles between the IDE drive and the programmable IDE controller. As the PIO mode increases, the cycle time decreases.

- ➔ **Auto** **DEFAULT** BIOS auto detects the PIO mode. Use this value if the IDE disk drive support cannot be determined.

## KINO-690AM2 Mini-ITX Motherboard

- ➔ 0 PIO mode 0 selected with a maximum transfer rate of 3.3MBps
  - ➔ 1 PIO mode 1 selected with a maximum transfer rate of 5.2MBps
  - ➔ 2 PIO mode 2 selected with a maximum transfer rate of 8.3MBps
  - ➔ 3 PIO mode 3 selected with a maximum transfer rate of 11.1MBps
  - ➔ 4 PIO mode 4 selected with a maximum transfer rate of 16.6MBps
- (This setting generally works with all hard disk drives manufactured after 1999. For other disk drives, such as IDE CD-ROM drives, check the specifications of the drive.)

### ➔ DMA Mode [Auto]

Use the **DMA Mode** BIOS selection to adjust the DMA mode options.

- ➔ **Auto**      **DEFAULT**      BIOS auto detects the DMA mode. Use this value if the IDE disk drive support cannot be determined.
- ➔ **SWDMA0**      Single Word DMA mode 0 selected with a maximum data transfer rate of 2.1MBps
- ➔ **SWDMA1**      Single Word DMA mode 1 selected with a maximum data transfer rate of 4.2MBps
- ➔ **SWDMA2**      Single Word DMA mode 2 selected with a maximum data transfer rate of 8.3MBps
- ➔ **MWDMA0**      Multi Word DMA mode 0 selected with a maximum data transfer rate of 4.2MBps
- ➔ **MWDMA1**      Multi Word DMA mode 1 selected with a maximum data transfer rate of 13.3MBps
- ➔ **MWDMA2**      Multi Word DMA mode 2 selected with a maximum data transfer rate of 16.6MBps



## KINO-690AM2 Mini-ITX Motherboard

- ➔ **UDMA1** Ultra DMA mode 0 selected with a maximum data transfer rate of 16.6MBps
- ➔ **UDMA1** Ultra DMA mode 1 selected with a maximum data transfer rate of 25MBps
- ➔ **UDMA2** Ultra DMA mode 2 selected with a maximum data transfer rate of 33.3MBps
- ➔ **UDMA3** Ultra DMA mode 3 selected with a maximum data transfer rate of 44MBps (To use this mode, it is required that an 80-conductor ATA cable is used.)
- ➔ **UDMA4** Ultra DMA mode 4 selected with a maximum data transfer rate of 66.6MBps (To use this mode, it is required that an 80-conductor ATA cable is used.)
- ➔ **UDMA5** Ultra DMA mode 5 selected with a maximum data transfer rate of 99.9MBps (To use this mode, it is required that an 80-conductor ATA cable is used.)

➔ **S.M.A.R.T [Auto]**

Use the **S.M.A.R.T** option to auto-detect, disable or enable Self-Monitoring Analysis and Reporting Technology (SMART) on the drive on the specified channel. **S.M.A.R.T** predicts impending drive failures. The **S.M.A.R.T** BIOS option enables or disables this function.

- ➔ **Auto**      **DEFAULT**      BIOS auto detects HDD SMART support.
- ➔ **Disabled**      Prevents BIOS from using the HDD SMART feature.
- ➔ **Enabled**      Allows BIOS to use the HDD SMART feature

➔ **32Bit Data Transfer [Enabled]**


Use the **32Bit Data Transfer** BIOS option to enables or disable 32-bit data transfers.

## KINO-690AM2 Mini-ITX Motherboard

- ➔ **Disabled** Prevents the BIOS from using 32-bit data transfers.
- ➔ **Enabled** **DEFAULT** Allows BIOS to use 32-bit data transfers on supported hard disk drives.

### 6.3.3 Super IO Configuration

Use the **Super IO Configuration** menu (**BIOS Menu 6**) to set or change the configurations for the FDD controllers, parallel ports and serial ports.

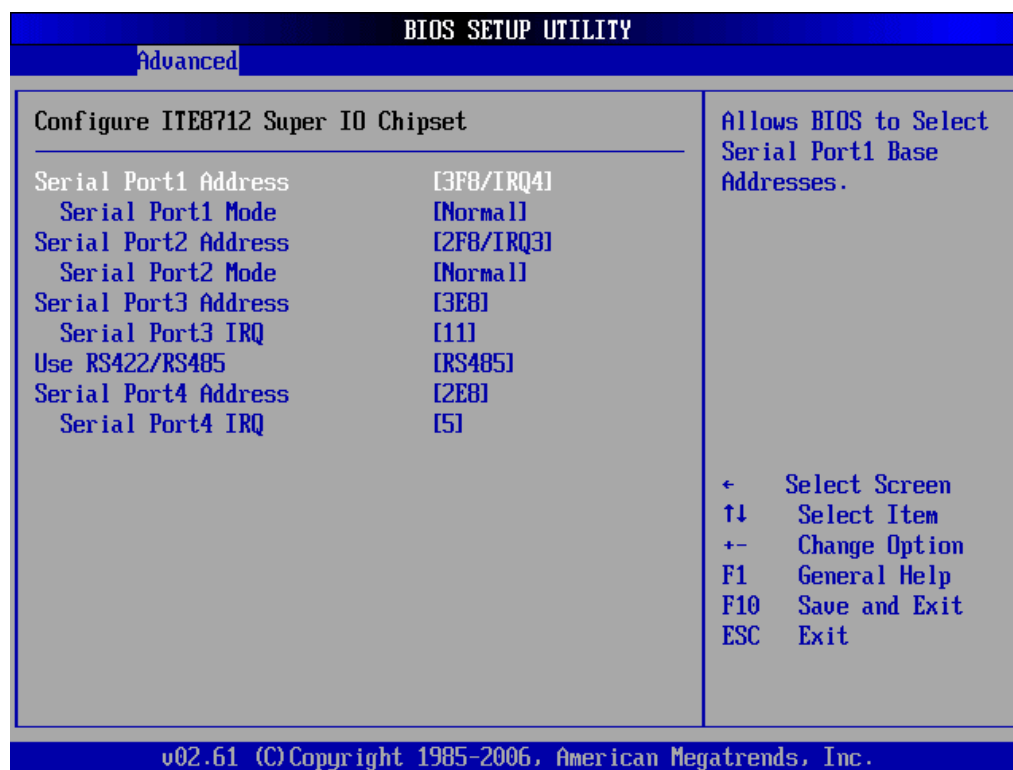

#### BIOS Menu 6: Super IO Configuration

- ➔ **Serial Port1 Address [3F8/IRQ4]**

Use the **Serial Port1 Address** option to select the Serial Port 1 base address.

- ➔ **Disabled** No base address is assigned to Serial Port 1
- ➔ **3F8/IRQ4** **DEFAULT** Serial Port 1 I/O port address is 3F8 and the interrupt

- **3E8/IRQ4**      address is IRQ4  
Serial Port 1 I/O port address is 3E8 and the interrupt address is IRQ4
- **2E8/IRQ3**      Serial Port 1 I/O port address is 2E8 and the interrupt address is IRQ3

→ **Serial Port1 Mode [Normal]**

Use the **Serial Port1 Mode** option to select the transmitting and receiving mode for the first serial port.

- **Normal**      **DEFAULT**      Serial Port 1 mode is normal
- **IrDA**      Serial Port 1 mode is IrDA
- **ASK IR**      Serial Port 1 mode is ASK IR

→ **Serial Port2 Address [2F8/IRQ3]**

Use the **Serial Port2 Address** option to select the Serial Port 2 base address.

- **Disabled**      No base address is assigned to Serial Port 2
- **2F8/IRQ3**      **DEFAULT**      Serial Port 2 I/O port address is 3F8 and the interrupt address is IRQ3
- **3E8/IRQ4**      Serial Port 2 I/O port address is 3E8 and the interrupt address is IRQ4
- **2E8/IRQ3**      Serial Port 2 I/O port address is 2E8 and the interrupt address is IRQ3

→ **Serial Port2 Mode [Normal]**

Use the **Serial Port2 Mode** option to select the Serial Port2 operational mode.

## KINO-690AM2 Mini-ITX Motherboard

- ➔ **Normal**      **DEFAULT**      Serial Port 2 mode is normal
- ➔ **IrDA**                      Serial Port 2 mode is IrDA
- ➔ **ASK IR**                      Serial Port 2 mode is ASK IR

➔ **Serial Port3 Address [3E8]**

Use the **Serial Port3 Address** option to select the base addresses for serial port 3

- ➔ **Disabled**                      No base address is assigned to serial port 3
- ➔ **3E8**      **DEFAULT**      Serial port 3 I/O port address is 3E8
- ➔ **2E8**                      Serial port 3 I/O port address is 2E8
- ➔ **338**                      Serial port 3 I/O port address is 338
- ➔ **238**                      Serial port 3 I/O port address is 238

➔ **Serial Port3 IRQ [11]**

Use the **Serial Port3 IRQ** option to select the interrupt address for serial port 3.

- ➔ **5**                      Serial port 3 IRQ address is 5
- ➔ **11**      **DEFAULT**      Serial port 3 IRQ address is 11

➔ **Use RS422/RS485 [RS485] RS422**

Use the **Use RS422/RS485** option to set the serial port 3 as RS-422 or RS-485.

- ➔ **RS422**                      Serial port 3 is set to RS-422
- ➔ **RS485**      **DEFAULT**      Serial port 3 is set to RS-485

➔ **Serial Port4 Address [2E8]**

Use the **Serial Port4 IRQ** option to select the interrupt address for serial port 4.



- ➔ **Disabled**                      No base address is assigned to serial port 3
- ➔ **3E8**                              Serial port 4 I/O port address is 3E8
- ➔ **2E8**                      **DEFAULT**      Serial port 4 I/O port address is 2E8
- ➔ **338**                              Serial port 3 I/O port address is 338
- ➔ **238**                              Serial port 3 I/O port address is 238

➔ **Serial Port4 IRQ [5]**


Use the **Serial Port4 IRQ** option to select the interrupt address for serial port 4.

- ➔ **5**                      **DEFAULT**      Serial port 4 IRQ address is 5
- ➔ **11**                              Serial port 4 IRQ address is 11

### 6.3.4 Hardware Health Configuration

The **Hardware Health Configuration** menu (**BIOS Menu 7**) shows the operating temperature, fan speeds and system voltages.

## KINO-690AM2 Mini-ITX Motherboard

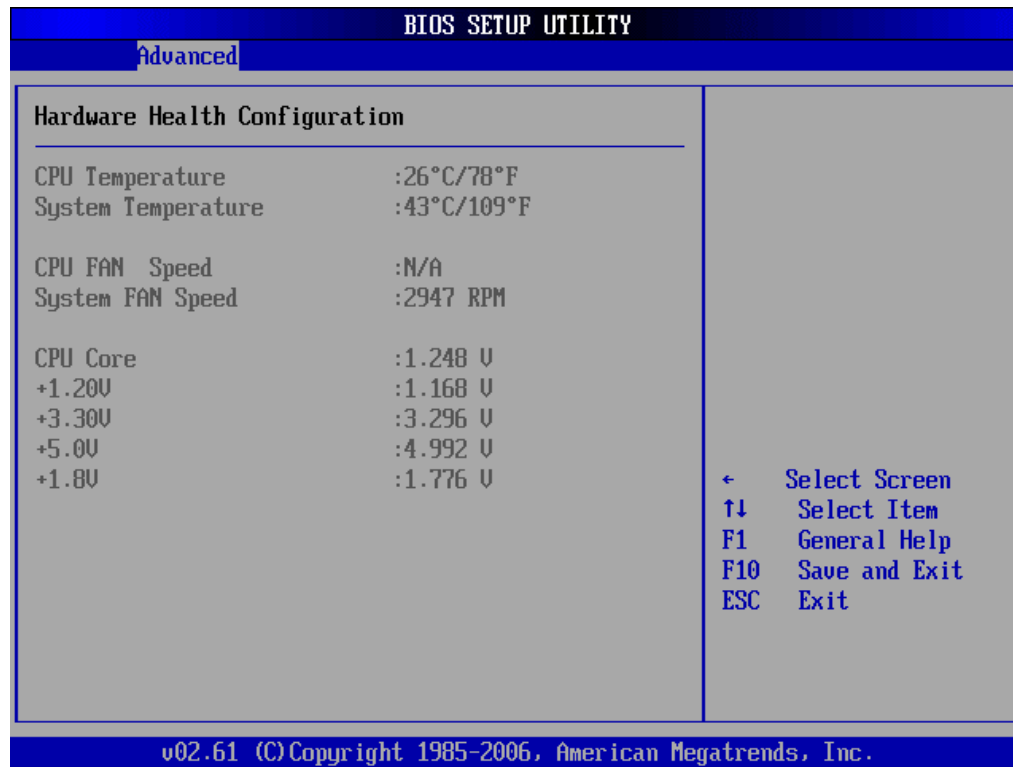


## BIOS Menu 7: Hardware Health Configuration

The following system parameters and values are shown. The system parameters that are monitored are:

- **System Temperatures:** The following system temperatures are monitored
  - CPU Temperature
  - System Temperature
- **Fan Speeds:** The CPU cooling fan speed is monitored.
  - CPU Fan Speed
  - System Fan Speed
- **Voltages:** The following system voltages are monitored
  - CPU Core
  - +1.20V
  - +3.30V
  - +5.0V
  - +1.8V

### 6.3.5 ACPI Configuration

The **ACPI Configuration** menu (**BIOS Menu 8**) configures the Advanced Configuration and Power Interface (ACPI) and Power Management (APM) options.

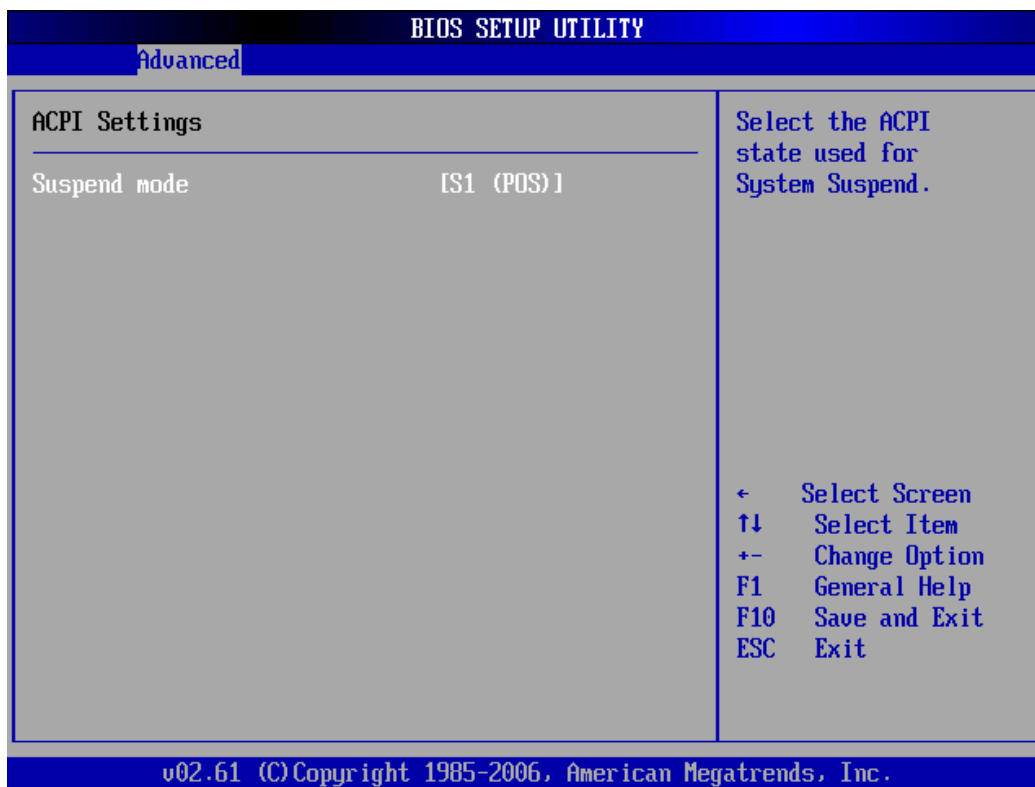

#### BIOS Menu 8: ACPI Configuration

##### ➔ Suspend Mode [S1 (POS)]

The **Suspend Mode** BIOS option specifies the sleep state your system will enter when it is not being used.


- ➔ **S1 (POS)    DEFAULT**    System appears off. The CPU is stopped; RAM is refreshed; the system is running in a low power mode.
- ➔ **S3 (STR)**    System appears off. The CPU has no power; RAM is in slow refresh; the power supply is in a reduced power mode.

## KINO-690AM2 Mini-ITX Motherboard

- ➔ **Auto**                      The system automatically determines the system sleep state.

### 6.3.6 Trusted Computing

Use the **Trusted Computing** menu (**BIOS Menu 9**) to configure settings related to the Trusted Computing Group (TCG) Trusted Platform Module (TPM).

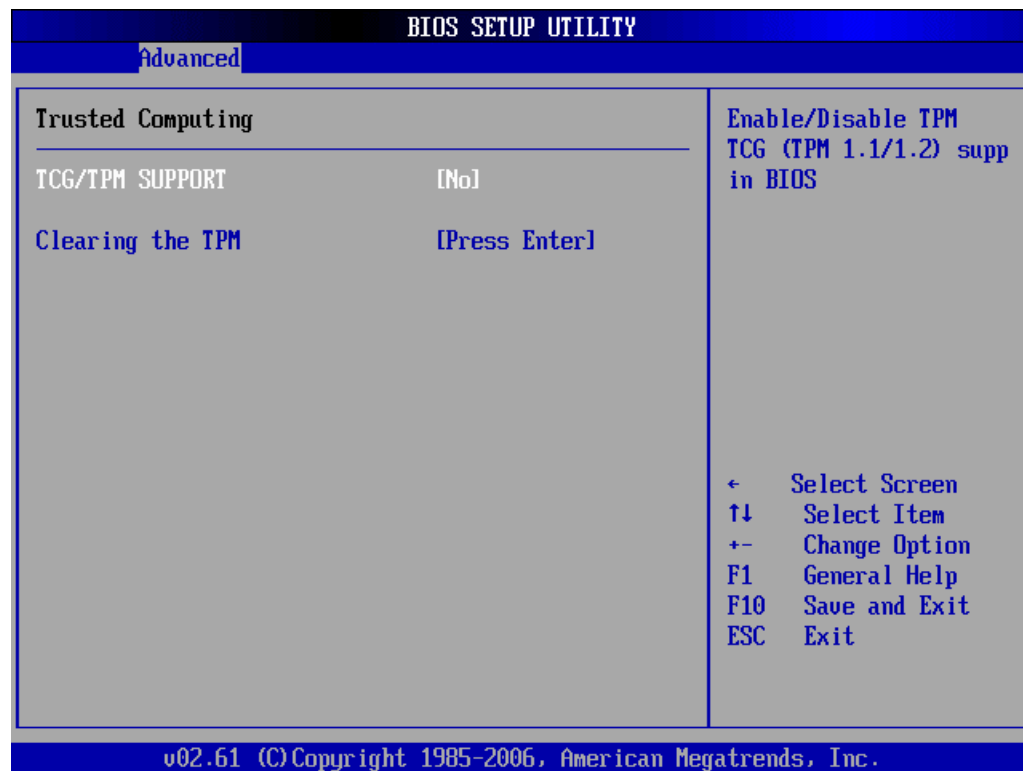

#### BIOS Menu 9: Trusted Computing

- ➔ **TCG/TPM Support [No]**

Use the **TCG/TPM Support** option to configure support for the TPM.

- ➔ **No    DEFAULT**    TPM support is disabled.
- ➔ **Yes**                      TPM support is enabled.


- ➔ **Clearing the TPM [Press Enter]**



Use the **Clearing the TPM** option to clear the information stored in the TPM.

### 6.3.7 Remote Access Configuration

Use the **Remote Access Configuration** menu (**BIOS Menu 10**) to configure remote access parameters. The **Remote Access Configuration** is an AMIBIOS feature and allows a remote host running a terminal program to display and configure the BIOS settings.

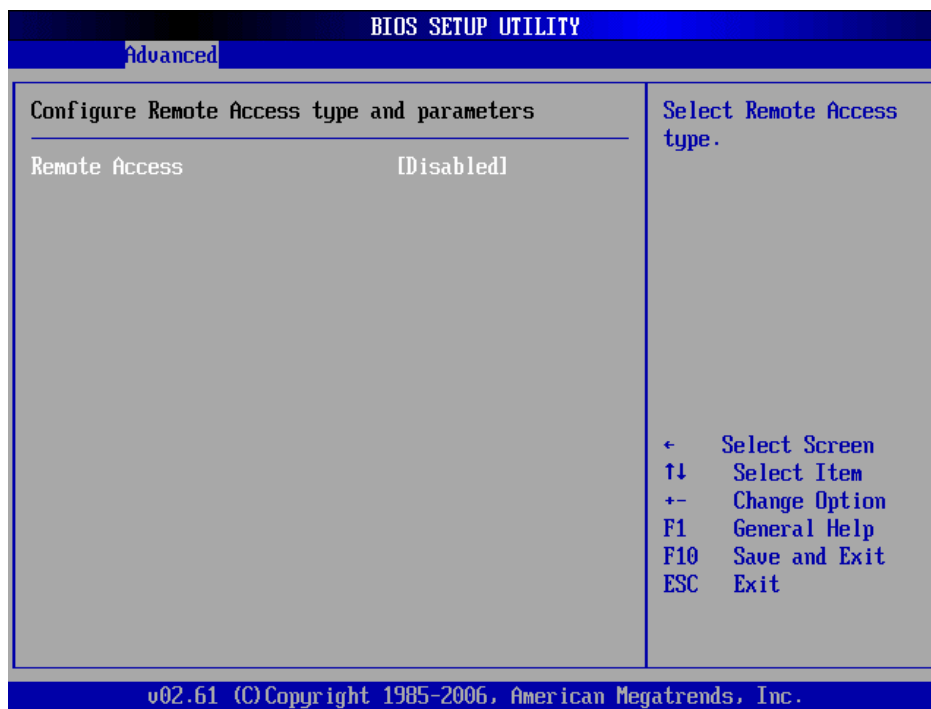

#### BIOS Menu 10: Remote Access Configuration [Advanced]

##### ➔ Remote Access [Disabled]

Use the **Remote Access** option to enable or disable access to the remote functionalities of the system.

- ➔ **Disabled**      **DEFAULT**      Remote access is disabled.
- ➔ **Enabled**      Remote access configuration options shown below appear:

- Serial Port Number
- Serial Port Mode
- Flow Control
- Redirection after BIOS POST
- Terminal Type
- VT-UTF8 Combo Key Support
- Sredir Memory Display Delay

These configuration options are discussed below.

→ **Serial Port Number [COM1]**

Use the **Serial Port Number** option allows to select the serial port used for remote access.

- **COM1**     **DEFAULT**     System is remotely accessed through COM1
- **COM2**                     System is remotely accessed through COM2
- **COM3**                     System is remotely accessed through COM3
- **COM4**                     System is remotely accessed through COM4

**NOTE:** Make sure the selected COM port is enabled through the Super I/O configuration menu.

→ **Base Address, IRQ [3F8h,4]**

The **Base Address, IRQ** option cannot be configured and only shows the interrupt address of the serial port listed above.

→ **Serial Port Mode [115200 8,n,1]**

Use the **Serial Port Mode** option to select baud rate through which the console redirection is made. The following configuration options are available

- 115200 8,n,1 **DEFAULT**
- 57600 8,n,1
- 38400 8,n,1
- 19200 8,n,1
- 09600 8,n,1


**NOTE:**

Identical baud rate setting must be set on the host (a management computer running a terminal software) and the slave

**→ Flow Control [None]**

Use the **Flow Control** option to report the flow control method for the console redirection application.

- |          |                 |                |  |
|----------|-----------------|----------------|--|
| <b>→</b> | <b>None</b>     | <b>DEFAULT</b> | No control flow,                           |
| <b>→</b> | <b>Hardware</b> |                | Hardware is set as the console redirection |
| <b>→</b> | <b>Software</b> |                | Software is set as the console redirection |

**→ Redirection After BIOS POST [Always]**

Use the **Redirection After BIOS POST** option to specify when console redirection should occur.

- |          |                    |                |  |
|----------|--------------------|----------------|--|
| <b>→</b> | <b>Disabled</b>    |                | The console is not redirected after POST                 |
| <b>→</b> | <b>Boot Loader</b> |                | Redirection is active during POST and during Boot Loader |
| <b>→</b> | <b>Always</b>      | <b>DEFAULT</b> | Redirection is always active (Some Oses may not          |

## KINO-690AM2 Mini-ITX Motherboard

work if set to Always)

### → Terminal Type [ANSI]

Use the **Terminal Type** BIOS option to specify the remote terminal type.

- **ANSI**      **DEFAULT**      The target terminal type is ANSI
- **VT100**      The target terminal type is VT100
- **VT-UTF8**      The target terminal type is VT-UTF8

### → VT-UTF8 Combo Key Support [Enabled]

Use the **VT-UFT8 Combo Key Support** option to enable additional keys that are not provided by VT100 for the PC 101 keyboard.

The VT100 Terminal Definition is the standard convention used to configure and conduct emergency management tasks with UNIX-based servers. VT100 does not support all keys on the standard PC 101-key layout, however. The VT-UTF8 convention makes available additional keys that are not provided by VT100 for the PC 101 keyboard.

- **Disabled**      Disables the VT-UTF8 terminal keys
- **Enabled**      **DEFAULT**      Enables the VT-UTF8 combination key. Support for ANSI/VT100 terminals


### → Sredir Memory Display Delay [No Delay]

Use the **Sredir Memory Display Delay** option to select the delay before memory information is displayed. Configuration options are listed below

- No Delay      **DEFAULT**
- Delay 1 sec
- Delay 2 sec
- Delay 4 sec

### 6.3.8 USB Configuration

Use the **USB Configuration** menu (**BIOS Menu 11**) to read USB configuration information and configure the USB settings.

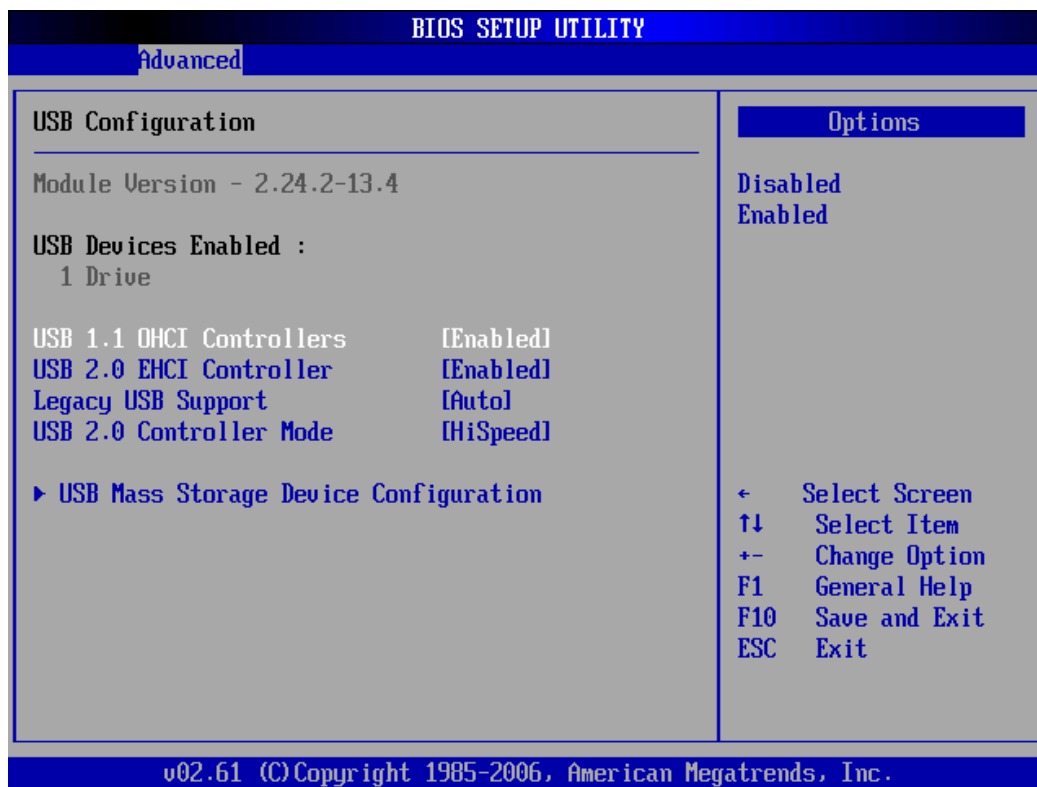

#### BIOS Menu 11: USB Configuration

##### ➔ USB 1.1 OHCI Controller [Enabled]

The **USB 1.1 OHCI Controller** BIOS option enables or disables the USB 1.1 controller

➔ **Disabled**                      USB 1.1 function disabled

➔ **Enabled**            **DEFAULT**            USB 1.1 function enabled

##### ➔ USB 2.0 EHCI Controller [Enabled]

The **USB 2.0 EHCI Controller** BIOS option enables or disables the USB 2.0 controller



## KINO-690AM2 Mini-ITX Motherboard

➔ **Disabled** USB EHCI function disabled

➔ **Enabled** **DEFAULT** USB function enabled

➔ **Legacy USB Support [Auto]**

Use the **Legacy USB Support** BIOS option to enable USB mouse and USB keyboard support.

Normally if this option is not enabled, any attached USB mouse or USB keyboard does not become available until a USB compatible operating system is fully booted with all USB drivers loaded. When this option is enabled, any attached USB mouse or USB keyboard can control the system even when there is no USB driver loaded onto the system.

➔ **Disabled** Legacy USB support disabled

➔ **Enabled** Legacy USB support enabled

➔ **Auto** **DEFAULT** Legacy USB support disabled if no USB devices are connected

➔ **USB2.0 Controller Mode [HiSpeed]**

Use the **USB2.0 Controller Mode** option to set the speed of the USB2.0 controller.

➔ **FullSpeed** The controller is capable of operating at 12Mb/s

➔ **HiSpeed** **DEFAULT** The controller is capable of operating at 480Mb/s


## 6.4 PCI/PnP

Use the PCI/PnP menu (**BIOS Menu 12**) to configure advanced PCI and PnP settings.




### **WARNING:**

Setting wrong values for the BIOS selections in the PCIPnP BIOS menu may cause the system to malfunction.

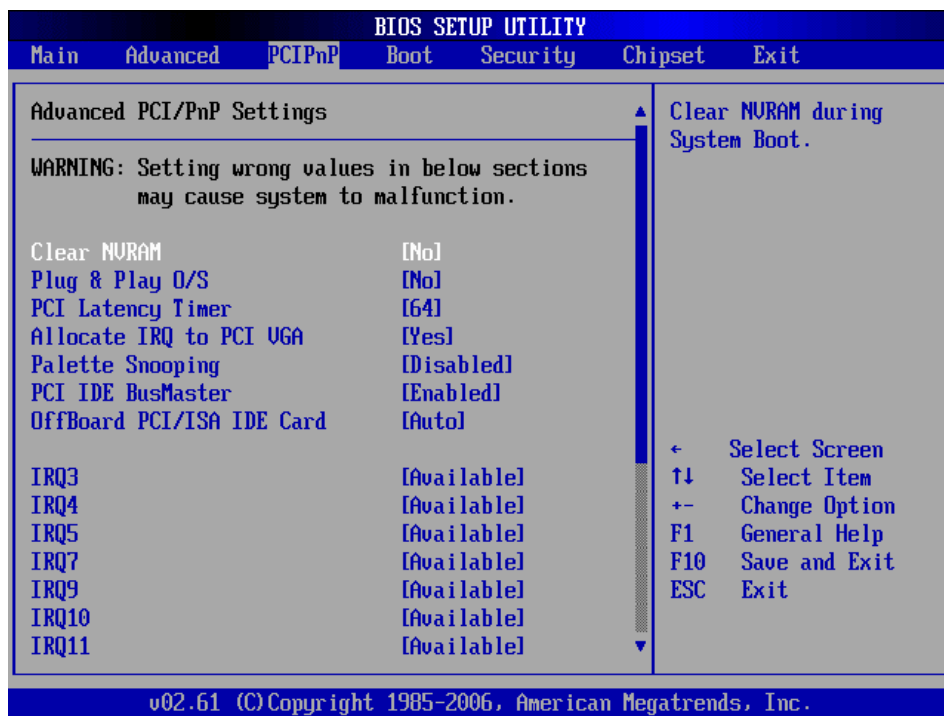

## KINO-690AM2 Mini-ITX Motherboard

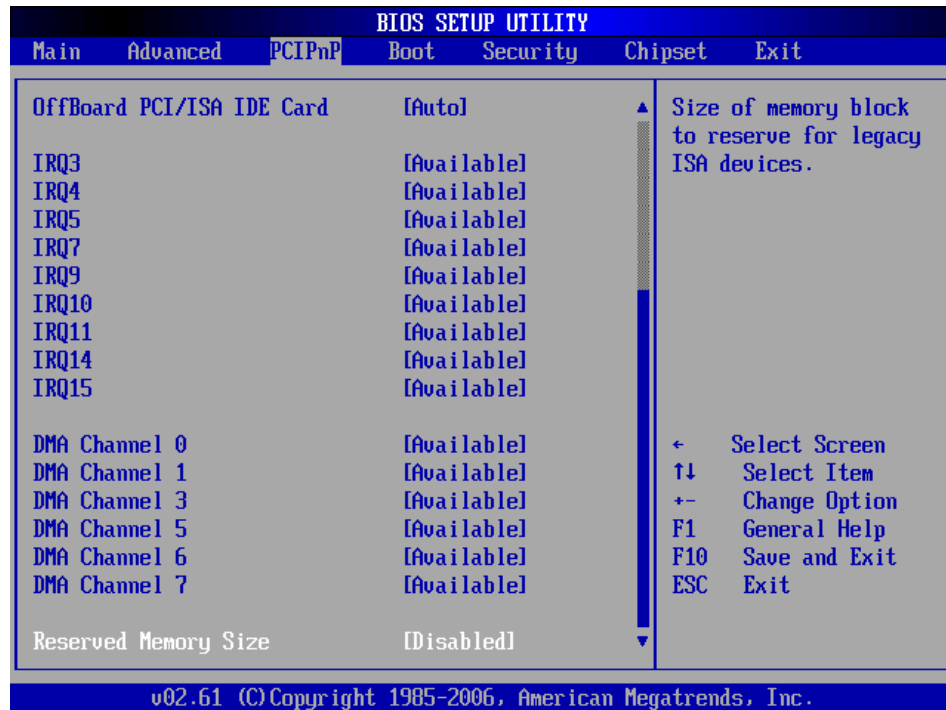

### BIOS Menu 12: PCI/PnP Configuration

#### → Clear NVRAM [No]

Use the **Clear NVRAM** option to specify if the NVRAM (Non-Volatile RAM) is cleared when the power is turned off.

→ **No**      **DEFAULT**      System does not clear NVRAM during system boot

→ **Yes**                      System clears NVRAM during system boot

#### → Plug & Play O/S [No]

Use the **Plug & Play O/S** BIOS option to specify whether system plug and play devices are configured by the operating system or the BIOS.

→ **No**      **DEFAULT**      If the operating system does not meet the Plug and Play specifications, this option allows the BIOS to configure all the devices in the system.

- ➔ **Yes** This setting allows the operating system to change the interrupt, I/O, and DMA settings. Set this option if the system is running Plug and Play aware operating systems.

➔ **PCI Latency Timer [64]**

Use the **PCI Latency Timer** option to specify the PCI latency time. The latency time is measured in units of PCI clock cycles for the PCI device latency timer register. Configuration options are:

- 32
- 64 **DEFAULT**
- 96
- 128
- 160
- 192
- 224
- 248

➔ **Allocate IRQ to PCI VGA [Yes]**

Use the **Allocate IRQ to PCI VGA** option to restrict the system from giving the VGA adapter card an interrupt address.

- ➔ **Yes** **DEFAULT** Assigns an IRQ to a PCI VGA card if card requests IRQ
- ➔ **No** Does not assign IRQ to a PCI VGA card even if the card requests an IRQ

➔ **Palette Snooping [Disabled]**

Use the **Palette Snooping** option to enable or disable the palette snooping function.

- ➔ **Disabled** **DEFAULT** Unless the VGA card manufacturer requires palette snooping to be enabled, this option should be disabled.

## KINO-690AM2 Mini-ITX Motherboard

- ➔ **Enabled** PCI devices are informed that an ISA based Graphics device is installed in the system so the ISA based Graphics card functions correctly. This does not necessarily indicate a physical ISA adapter card. The graphics chipset can be mounted on a PCI card. Always check with the adapter card manual first, before modifying the default settings in the BIOS.

### ➔ **PCI IDE BusMaster [Enabled]**

Use the **PCI IDE BusMaster** BIOS option to enable or prevent PCI IDE busmastering.

- ➔ **Disabled** Busmastering is prevented
- ➔ **Enabled** **DEFAULT** IDE controller on the PCI local bus has mastering capabilities

### ➔ **OffBoard PCI/ISA IDE Card [Auto]**

Use the OffBoard PCI/ISA IDE Card BIOS option to select the OffBoard PCI/ISA IDE Card.

- ➔ **Auto** **DEFAULT** The location of the Off Board PCI IDE adapter card is automatically detected by the AMIBIOS.
- ➔ **PCI Slot 1** PCI Slot 1 is selected as the location of the OffBoard PCI IDE adapter card. Only select this slot if the adapter card is installed in PCI Slot 1.
- ➔ **PCI Slot 2** PCI Slot 2 is selected as the location of the OffBoard PCI IDE adapter card. Only select this slot if the adapter card is installed in PCI Slot 2.



- ➔ **PCI Slot 3**      PCI Slot 3 is selected as the location of the OffBoard PCI IDE adapter card. Only select this slot if the adapter card is installed in PCI Slot 3.
- ➔ **PCI Slot 4**      PCI Slot 4 is selected as the location of the OffBoard PCI IDE adapter card. Only select this slot if the adapter card is installed in PCI Slot 4.
- ➔ **PCI Slot 5**      PCI Slot 5 is selected as the location of the OffBoard PCI IDE adapter card. Only select this slot if the adapter card is installed in PCI Slot 5.
- ➔ **PCI Slot 6**      PCI Slot 6 is selected as the location of the OffBoard PCI IDE adapter card. Only select this slot if the adapter card is installed in PCI Slot 6.

➔ **IRQ# [Available]**

Use the **IRQ#** address to specify what IRQs can be assigned to a particular peripheral device.

- ➔ **Available      DEFAULT**      The specified IRQ is available to be used by PCI/PnP devices
- ➔ **Reserved**      The specified IRQ is reserved for use by Legacy ISA devices

Available IRQ addresses are:

- IRQ3
- IRQ4
- IRQ5
- IRQ7
- IRQ9
- IRQ10

## KINO-690AM2 Mini-ITX Motherboard

- IRQ 11
- IRQ 14
- IRQ 15

### → DMA Channel# [Available]

Use the **DMA Channel#** option to assign a specific DMA channel to a particular PCI/PnP device.

- |   |                  |                |  |
|---|------------------|----------------|--|
| → | <b>Available</b> | <b>DEFAULT</b> | The specified DMA is available to be used by PCI/PnP devices |
| → | <b>Reserved</b>  |                | The specified DMA is reserved for use by Legacy ISA devices  |

Available DMA Channels are:

- DM Channel 0
- DM Channel 1
- DM Channel 3
- DM Channel 5
- DM Channel 6
- DM Channel 7


### → Reserved Memory Size [Disabled]

Use the **Reserved Memory Size** BIOS option to specify the amount of memory that should be reserved for legacy ISA devices.

- |   |                 |                |   |
|---|-----------------|----------------|---|
| → | <b>Disabled</b> | <b>DEFAULT</b> | No memory block reserved for legacy ISA devices |
| → | <b>16K</b>      |                | 16KB reserved for legacy ISA devices            |
| → | <b>32K</b>      |                | 32KB reserved for legacy ISA devices            |
| → | <b>64K</b>      |                | 54KB reserved for legacy ISA devices            |

## 6.5 Boot

Use the Boot menu (**BIOS Menu 13**) to configure system boot options.

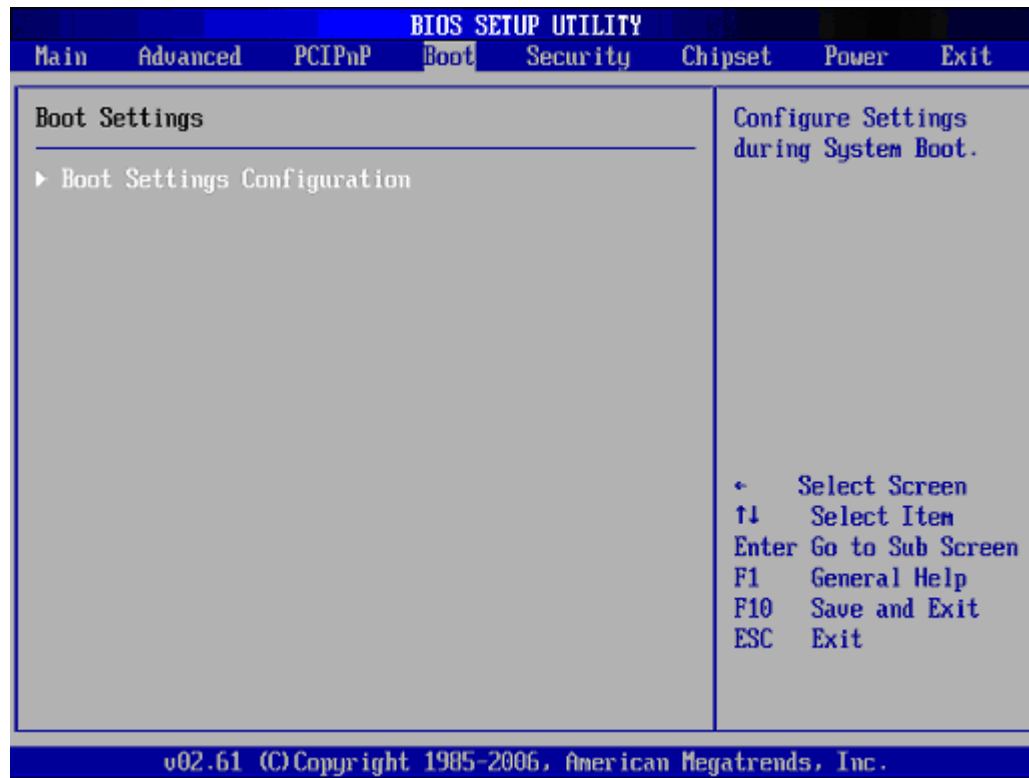


**BIOS Menu 13: Boot**

### 6.5.1 Boot Settings Configuration

Use the Boot Settings Configuration menu (**BIOS Menu 14**) to configure advanced system boot options.

## KINO-690AM2 Mini-ITX Motherboard

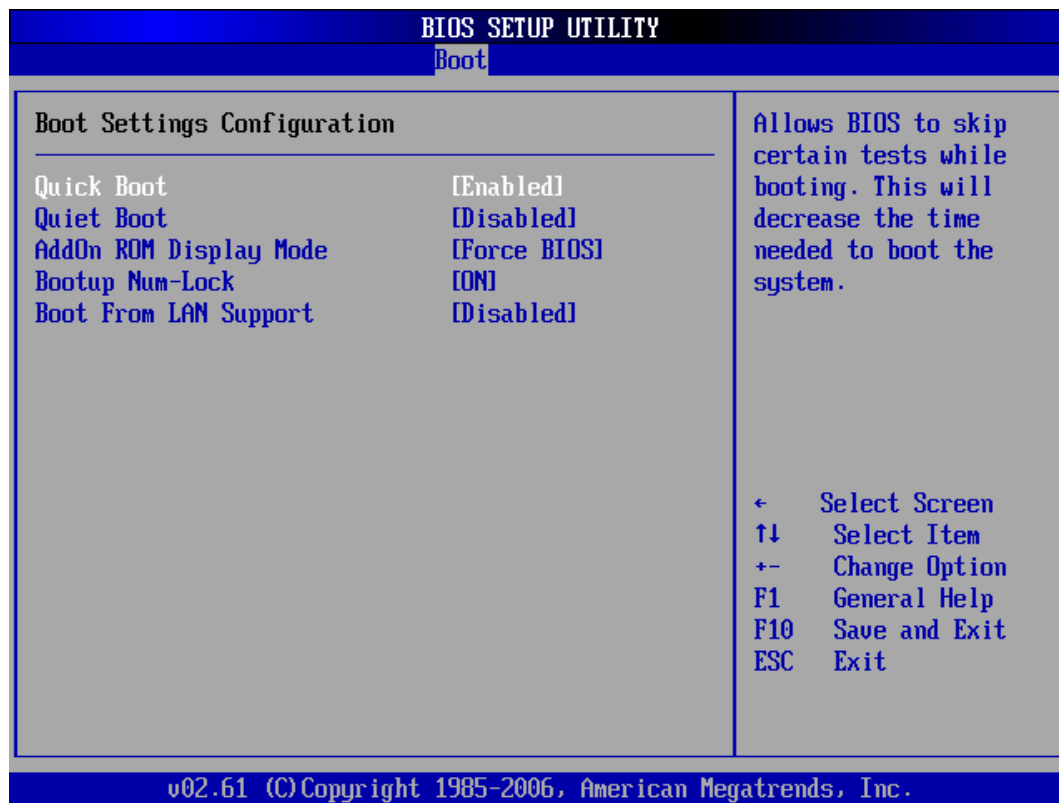

### BIOS Menu 14: Boot Settings Configuration

#### → Quick Boot [Enabled]

Use the **Quick Boot** BIOS option to make the computer speed up the boot process.

- **Disabled** No POST procedures are skipped
- **Enabled** **DEFAULT** Some POST procedures are skipped to decrease the system boot time

#### → Quiet Boot [Disabled]

Use the **Quiet Boot** BIOS option to select the screen display when the system boots.

- **Disabled** **DEFAULT** Normal POST messages displayed
- **Enabled** OEM Logo displayed instead of POST messages

➔ **AddOn ROM Display Mode [Force BIOS]**

Use the **AddOn ROM Display Mode** option to allow add-on ROM (read-only memory) messages to be displayed.

- ➔ **Force BIOS**      **DEFAULT**      The system forces third party BIOS to display during system boot.
- ➔ **Keep Current**      The system displays normal information during system boot.

➔ **Bootup Num-Lock [On]**

Use the **Bootup Num-Lock** BIOS option to specify if the number lock setting must be modified during boot up.

- ➔ **Off**      Does not enable the keyboard Number Lock automatically. To use the 10-keys on the keyboard, press the Number Lock key located on the upper left-hand corner of the 10-key pad. The Number Lock LED on the keyboard lights up when the Number Lock is engaged.
- ➔ **On**      **DEFAULT**      Allows the Number Lock on the keyboard to be enabled automatically when the computer system boots up. This allows the immediate use of the 10-key numeric keypad located on the right side of the keyboard. To confirm this, the Number Lock LED light on the keyboard is lit.

➔ **Boot From LAN Support [Disabled]**

Use the **BOOT From LAN Support** option to enable the system to be booted from a remote system.

- ➔ **Disabled**      **DEFAULT**      Cannot be booted from a remote system through the




## KINO-690AM2 Mini-ITX Motherboard

	LAN
➔ Enabled	Can be booted from a remote system through the LAN

### 6.6 Security

Use the Security menu (**BIOS Menu 15**) to set system and user passwords.

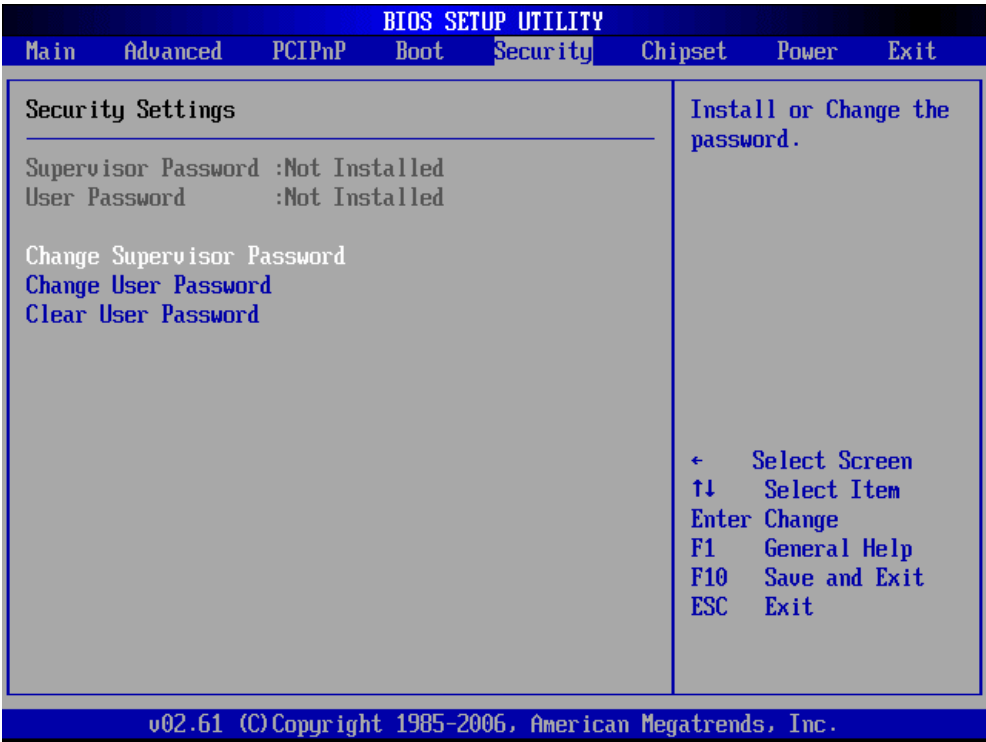

#### BIOS Menu 15: Security

##### ➔ Change Supervisor Password

Use the **Change Supervisor Password** to set or change a supervisor password. The default for this option is **Not Installed**. If a supervisor password must be installed, select this field and enter the password. After the password has been added, **Install** appears next to **Change Supervisor Password**.

→ **Change User Password**

Use the **Change User Password** to set or change a user password. The default for this option is **Not Installed**. If a user password must be installed, select this field and enter the password. After the password has been added, **Install** appears next to **Change User Password**.

## 6.7 Chipset

Use the **Chipset** menu (**BIOS Menu 16**) to access the NorthBridge and SouthBridge configuration menus




### **WARNING!**

Setting the wrong values for the Chipset BIOS selections in the Chipset BIOS menu may cause the system to malfunction.

---


## KINO-690AM2 Mini-ITX Motherboard

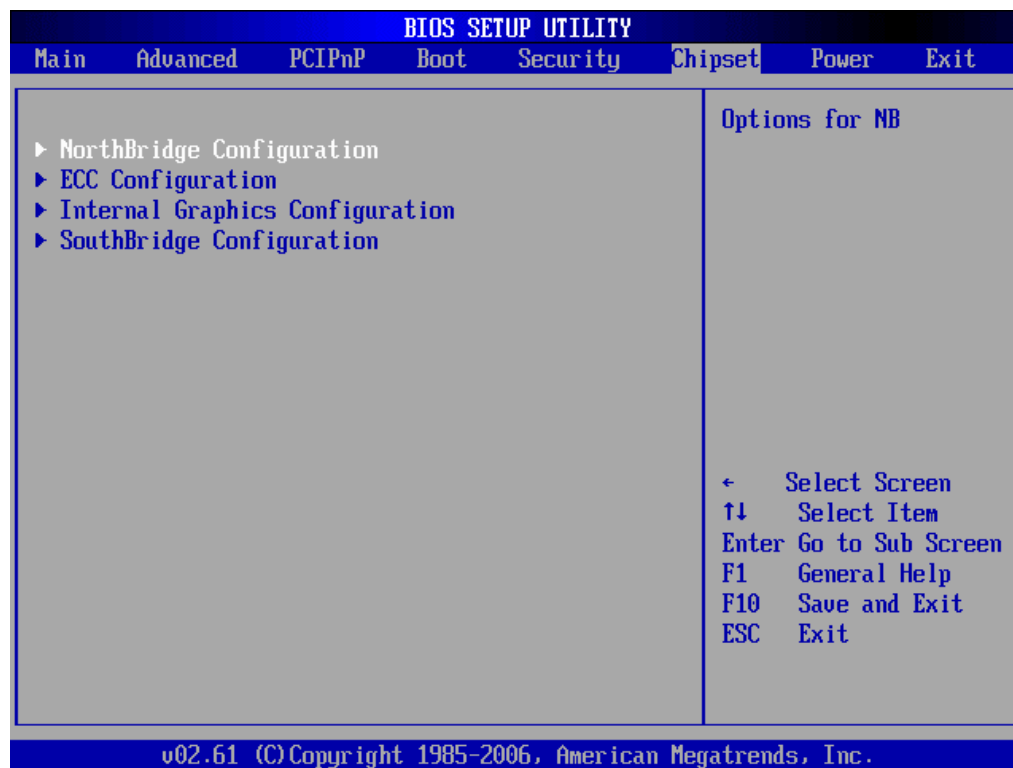

BIOS Menu 16: Chipset

### 6.7.1 NorthBridge Chipset Configuration

Use the NorthBridge Chipset Configuration menu (**BIOS Menu 16**) to check the Northbridge chipset settings.

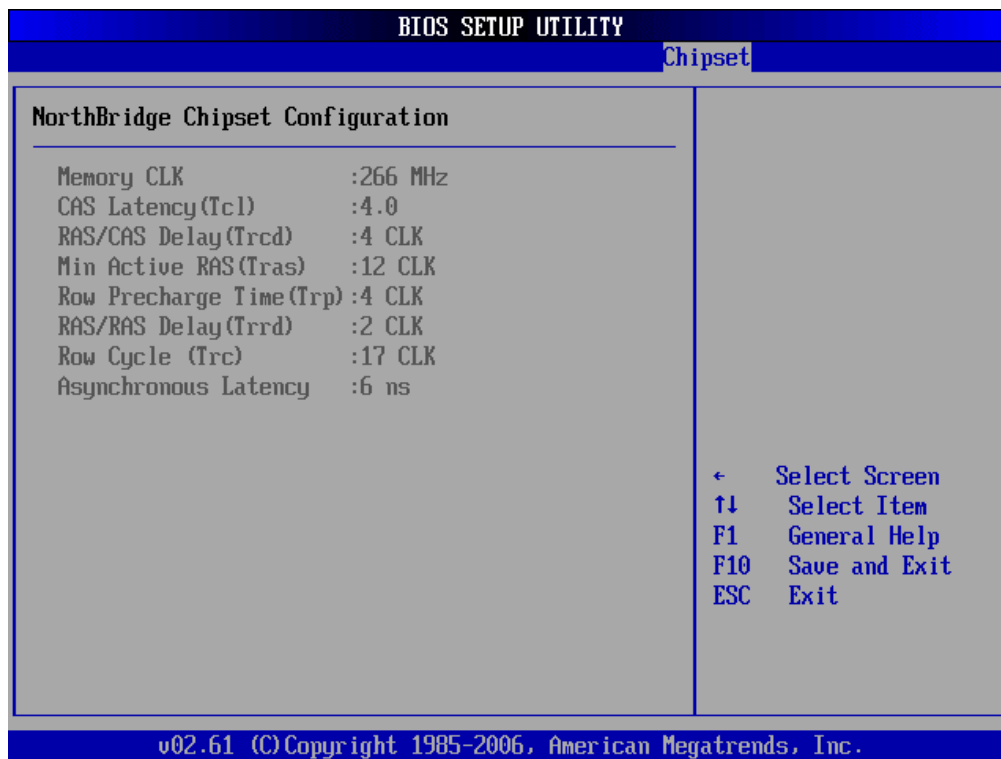

#### BIOS Menu 17:NorthBridge Chipset Configuration


The NorthBridge Chipset configuration menu has no configurable options. The NorthBridge Chipset configuration menu shows the following Northbridge chipset settings:

- **Memory CLK:** Shows the speed of the memory controller
- **CAS (Latency):** Specifies the Column Address Strobe (CAS) delay time
- **RAS/CAS Delay(Trcd):** Specifies the number of clock cycles that must elapse between sending a RAS (row address strobe) signal and the CAS (column address strobe) signal.
- **Min Active RAS (Tras):** Specifies the speed at which the RAM terminates the access of one row and start accessing another.
- **Row Precharge Time(Trp):** Specifies the length of the delay between the activation and precharge commands for the RAS signal.
- **RAS/RAS Delay(Trrd)**
- **Row Cycle (Trc)**
- **Asynchronous Latency**

## KINO-690AM2 Mini-ITX Motherboard

### 6.7.2 ECC Configuration

Use the **ECC Configuration** menu (**BIOS Menu 18**) to set the ECC parameters.

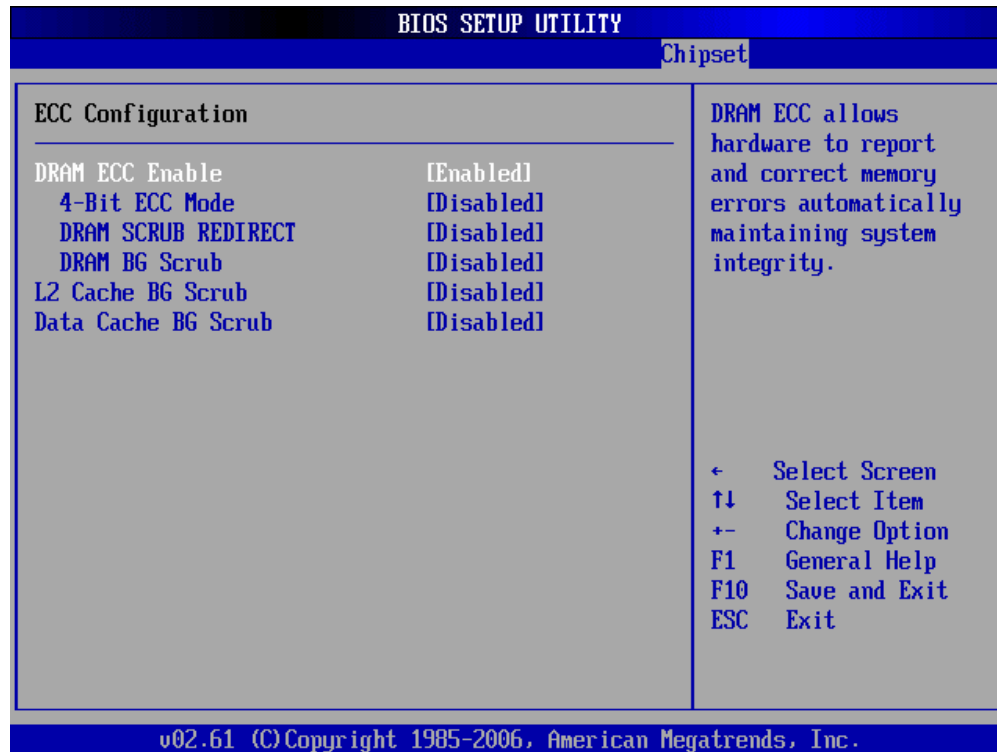

#### BIOS Menu 18: ECC Configuration Chipset Configuration

##### → DRAM ECC Enable [Enabled]

Use the **DRAM ECC Enable** option to enable the hardware to report and correct memory errors and thereby automatically maintain the system.

→ **Disabled** System cannot report and correct memory errors

→ **Enabled** **DEFAULT** System can report and correct memory errors

##### → 4-Bit ECC Mode [Disabled]

Use the **4-Bit ECC Mode** to enable or disable the 4-Bit ECC mode (a.k.a. CHIPKILL ECC MODE)



- ➔ **Disabled** 4-Bit ECC mode disabled
- ➔ **Enabled** **DEFAULT** 4-Bit ECC mode enabled

➔ **DRAM SCRUB REDIRECT [Disabled]**

Use the **DRAM SCRUB REDIRECT** option to enable the system to immediately correct DRAM ECC errors when they occur, even when background scrubbing is on.

- ➔ **Disabled** **DEFAULT** System cannot immediately correct DRAM ECC errors
- ➔ **Enabled** System cannot immediately correct DRAM ECC errors

➔ **DRAM BG Scrub [Disabled]**

Use the **DRAM BG Scrub** option to enable the system to immediately correct memory errors so later reads are correct. Doing this while memory is not being used improves performance.



**NOTE:**

When the AMD node interleave feature is enabled, BIOS will force DRAM scrub off.

- ➔ **Disabled** **DEFAULT** System cannot immediately correct memory errors
- ➔ **Enabled** System cannot immediately correct memory errors

➔ **L2 Cache BG Scrub [Disabled]**

Use the **L2 Cache BG Scrub** option to enable the system to correct the L2 Data cache when idle.

- ➔ **Disabled** **DEFAULT** L2 cache can be corrected when the system is idle.

## KINO-690AM2 Mini-ITX Motherboard

➔ **Enabled** L2 cache cannot be corrected when the system is idle.

➔ **L1 Cache BG Scrub [Disabled]**


Use the **L1 Cache BG Scrub** option to enable the system to correct the L1 Data cache when idle.

➔ **Disabled** **DEFAULT** L1 cache can be corrected when the system is idle.

➔ **Enabled** L1 cache cannot be corrected when the system is idle.

### 6.7.3 Internal Graphics Configuration

Use the **Internal Graphics Configuration (BIOS Menu 19)** menu to set the integrated graphics.

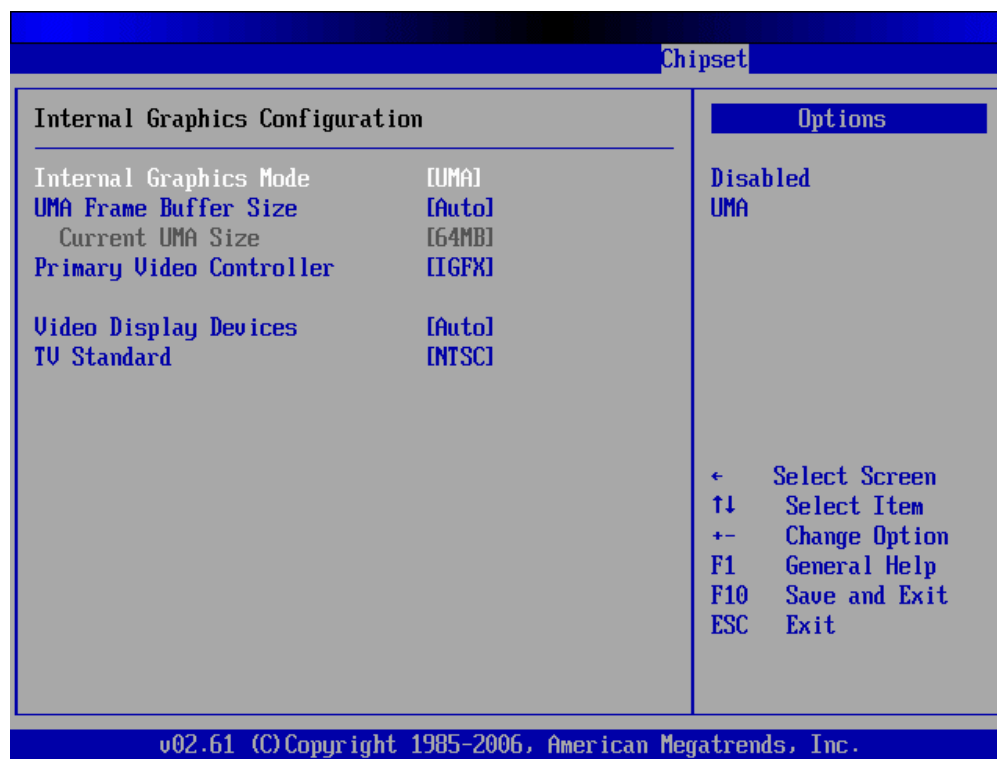

#### BIOS Menu 19: Internal Graphics Configuration

➔ **Internal Graphics Mode [UMA]**

➔	<b>Disabled</b>		The internal graphics mode is disabled.
➔	<b>SIDEPORT</b>		The integrated graphics core treats the SidePort memory as its local memory
➔	<b>UMA</b>	<b>DEFAULT</b>	The integrated graphics can only access a dynamically allocated partition of system memory.
➔	<b>UMA + SIDEPORT</b>		The integrated graphics core first uses SidePort memory and then system memory. If more memory is needed, the driver allocates memory dynamically through the system memory.

Use the **UMA Frame Buffer Size** option to specify the memory to be reserved for the integrated graphics. The following configuration options are available:

- Auto **DEFAULT**
- 32MB
- 64MB
- 128MB
- 256MB
- 512MB
- 1024MB

The current UMA Buffer Size field specifies the amount of memory that is allocated to the integrated graphics.

## Page 142

## KINO-690AM2 Mini-ITX Motherboard

Use the **Primary Video Controller** option to select the primary video graphics controller the system uses. The following options are available:

- PCIE
- PCI
- IGFX


### → TV Standard

Use the **TV Standard** option to specify the TV type connected to the system.

- |   |       |         |                         |
|---|-------|---------|-------------------------|
| → | NTSC  | DEFAULT | TV type is set to NTSC  |
| → | PAL   |         | TV type is set to PAL   |
| → | PAL-M |         | TV type is set to PAL-M |
| → | PAL-N |         | TV type is set to PAL-N |

## 6.7.4 SouthBridge Configuration

The **SouthBridge Configuration** menu (**BIOS Menu 20**) the Southbridge chipset to be configured.

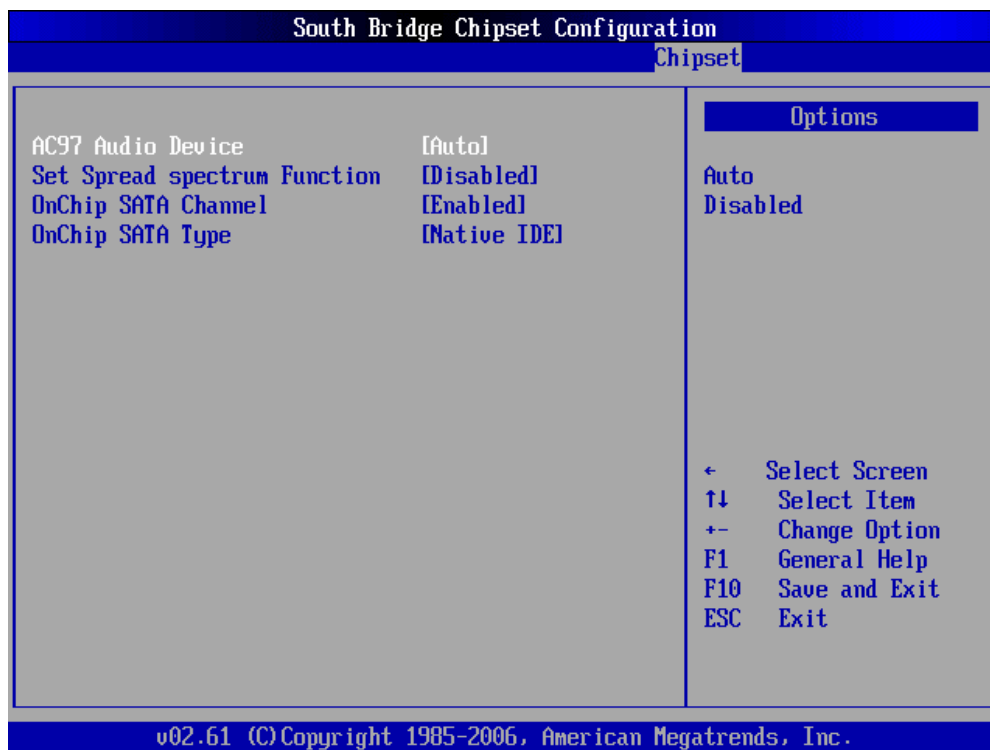

#### BIOS Menu 20:SouthBridge Chipset Configuration

##### → AC97 Audio Device [Auto]

Use the **AC97 Audio Device** option to enable or disable the AC'97 CODEC.

- **Disabled**                      The onboard AC'97 is disabled
- **Auto**                      **DEFAULT**      The onboard AC'97 automatically detected and enabled

##### → Set Spread Spectrum Function [Disabled]

Use the **Set Spread Spectrum** BIOS option to improve CPU EMI issues.

- **Disabled**                      **DEFAULT**      The clock spread spectrum is disabled
- **Enabled**                      The clock spread spectrum is enabled

##### → OnChip SATA Channel [Enabled]



## KINO-690AM2 Mini-ITX Motherboard

Use the **OnChip SATA Channel** option to enable or disable the SATA controller on the Southbridge.

- ➔ **Disabled** Disables the Southbridge SATA controller.
- ➔ **Enabled** **DEFAULT** Enables the Southbridge SATA controller.


### ➔ **OnChip SATA Type [Native IDE]**

Use the **OnChip SATA Type** option to specify the drive type that is installed in the system/  
The following options are available:

- Native IDE **DEFAULT**
- RAID
- AHCI
- Legacy IDE
- IDE → AHCI

## 6.8 Power

The **Power** menu (**BIOS Menu 21**) allows the advanced power management options to be configured.

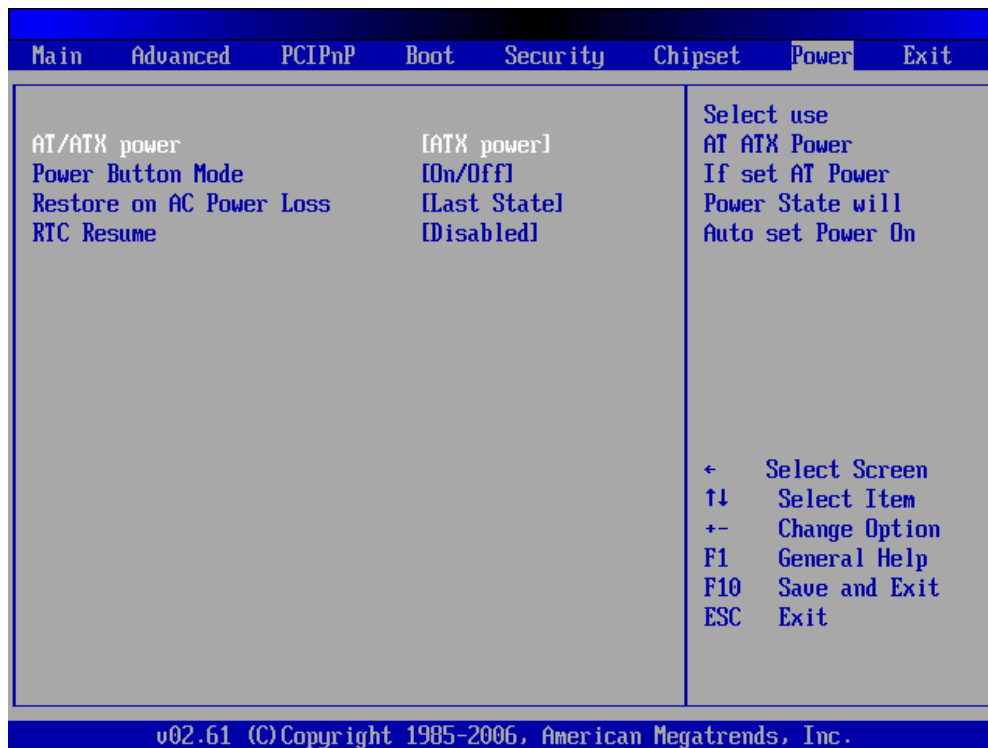

**BIOS Menu 21: Power**

### ➔ AT/ATX Power [ATX power]

Use the **AT/ATX Power** BIOS option to select the power supply that is connected to the system.

➔ **AT power**                      An AT power supply is connected to the system

➔ **ATX power**    **DEFAULT**      An ATX power supply is connected to the system

### ➔ Power Button Mode [On/Off]

Use the **Power Button Mode** BIOS to specify how the power button functions.

## KINO-690AM2 Mini-ITX Motherboard

- ➔ **On/Off**      **DEFAULT**      When the power button is pressed the system is either turned on or off
- ➔ **Suspend**      When the power button is pressed the system goes into suspend mode

### ➔ **Restore on AC Power Loss [Last State]**

The Restore on AC Power Loss BIOS option specifies what state the system returns to if there is a sudden loss of power to the system.

- ➔ **Power Off**      The system remains turned off
- ➔ **Power On**      The system turns on
- ➔ **Last State**      **DEFAULT**      The system returns to its previous state. If it was on, it turns itself on. If it was off, it remains off.

### ➔ **RTC Resume [Disabled]**

Use the **RTC Resume** option to specify the time the system should be roused from a suspended state.

- ➔ **Disabled**      **DEFAULT**      The real time clock (RTC) cannot generate a wake event
- ➔ **Enabled**      If selected, the following appears with values that can be selected:


#### ➔ **RTC Alarm Date (Days)**

#### ➔ **RTC Alarm Time (HH:MM:SS)**

After setting the alarm, the computer turns itself on from a suspend state when the alarm goes off.

## 6.9 Exit

Use the **Exit** menu (**BIOS Menu 22**) to load default BIOS values, optimal failsafe values and to save configuration changes.

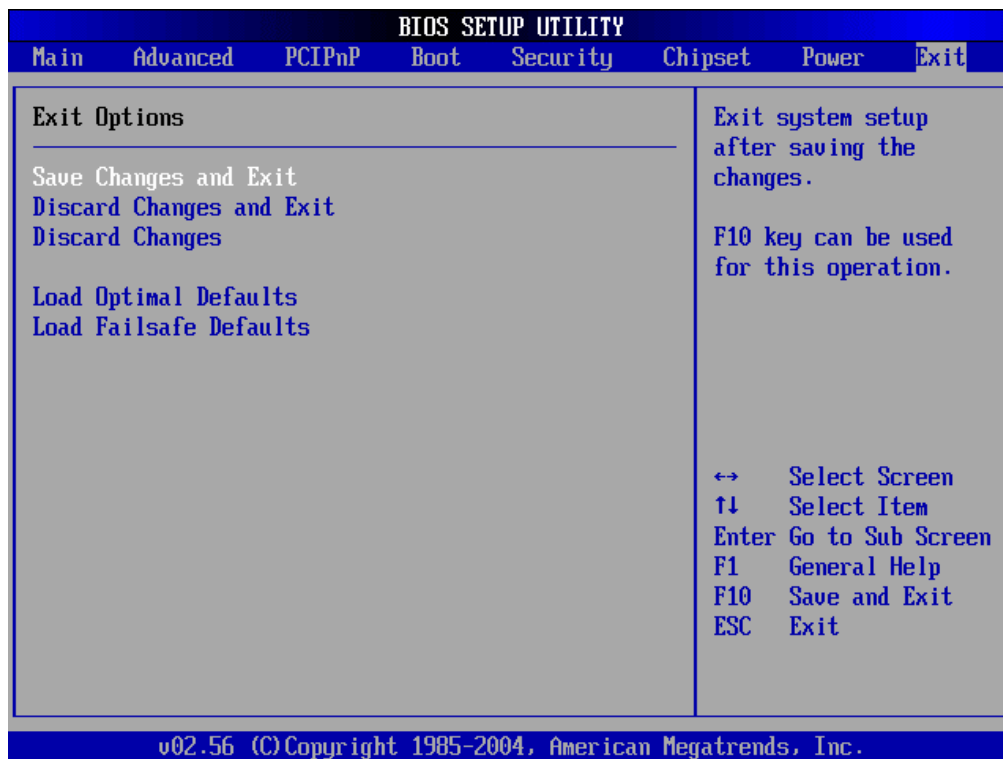

### BIOS Menu 22:Exit

#### ➔ Save Changes and Exit

Use the **Save Changes and Exit** option to save the changes made to the BIOS options and to exit the BIOS configuration setup program.

#### ➔ Discard Changes and Exit

Use the **Discard Changes and Exit** option to exit the BIOS configuration setup program without saving the changes made to the system.

#### ➔ Discard Changes

## KINO-690AM2 Mini-ITX Motherboard

Use the **Discard Changes** option to discard the changes and remain in the BIOS configuration setup program.

### ➔ Load Optimal Defaults

Use the **Load Optimal Defaults** option to load the optimal default values for each of the parameters on the Setup menus. **F9 key can be used for this operation.**

### ➔ Load Failsafe Defaults

Use the **Load Failsafe Defaults** option to load failsafe default values for each of the parameters on the Setup menus. **F8 key can be used for this operation.**





**THIS PAGE IS INTENTIONALLY LEFT BLANK**

Chapter

7

# Software Drivers

---

## 7.1 Available Software Drivers

---



### NOTE:

The content of the CD may vary throughout the life cycle of the product and is subject to change without prior notice. Visit the IEI website or contact technical support for the latest updates.

---

The following drivers can be installed on the system:

- AMD chipset driver
- LAN driver
- Audio driver

Installation instructions are given below.

## 7.2 Driver CD Auto-run

All the drivers for the KINO-690AM2 are on the CD that came with the system. To install the drivers, please follow the steps below.

**Step 1:** Insert the CD into a CD drive connected to the system.

---



### NOTE:

If the system does not initiate the "autorun" program when the CD is inserted, click the **Start** button, select **Run**, then type **X:\autorun.exe** (where **X:\** is the system CD drive) to access the IEI Driver CD main menu.

---

**Step 2:** The driver main menu appears (**Figure 7-1**).

## KINO-690AM2 Mini-ITX Motherboard



Figure 7-1: Introduction Screen

**Step 3:** Click KINO-690AM2.

**Step 4:** A new screen with a list of available drivers appears (**Figure 7-2**).

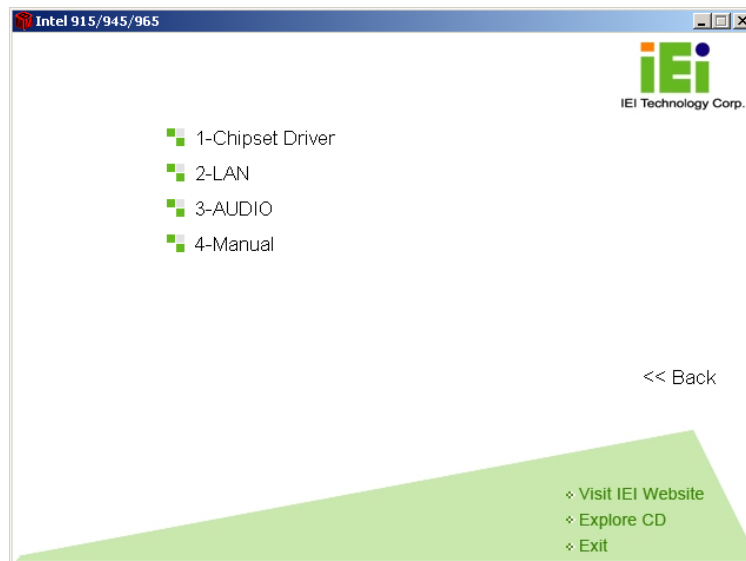


Figure 7-2: Available Drivers

**Step 5:** Select the driver to install from the list in **Figure 7-2**. Detailed driver installation instructions follow below.

## 7.3 AMD 690G Chipset Driver Installation

To install the chipset driver, please follow the steps below.




### NOTE:

The chipset driver control center requires Microsoft .NET Framework prior to installation. The driver control center is an application that allows a user to control the configuration of the AMD product. To verify .NET Framework, check the Add/Remove Programs list in the Control Panel. If the .NET Framework is not listed, please download, and install it.

**Step 1:** Select **Chipset** from the list in **Figure 7-2**.

**Step 2:** A new window opens (**Figure 7-3**).

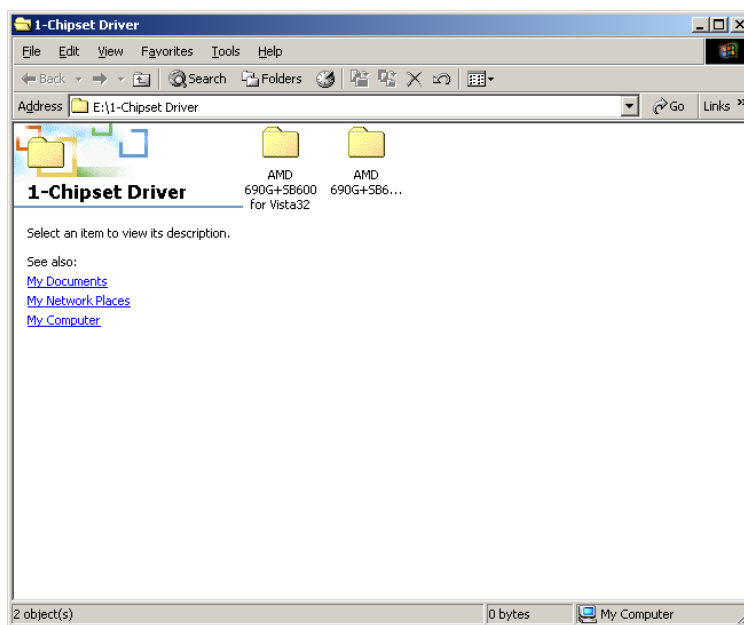


**Figure 7-3: Chipset Driver Installation Program**

**Step 3:** Double-click the directory icon for the operating system that is running on the system.




## KINO-690AM2 Mini-ITX Motherboard

**Step 4:** The screen in **Figure 7-4** appears.

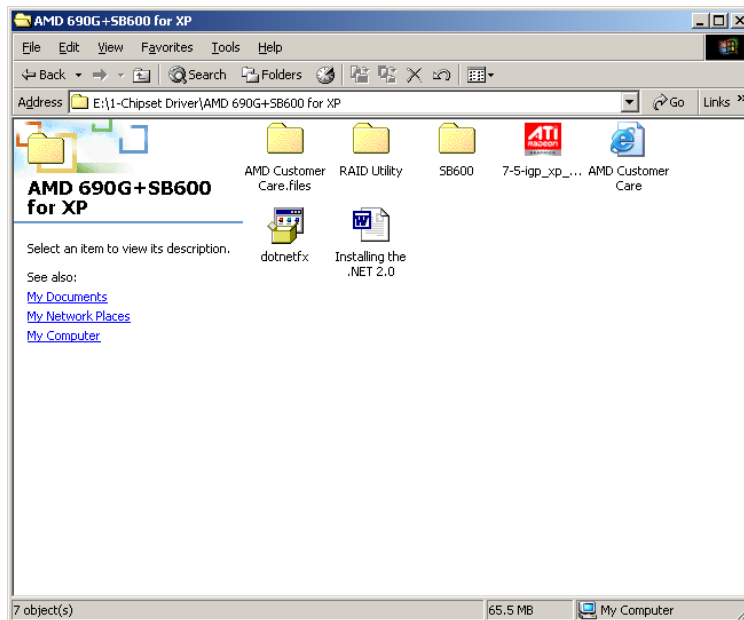


**Figure 7-4: Chipset Driver Installation Welcome Screen**

**Step 5:** Open the **SB600** directory. The screen in **Figure 7-5** appears.

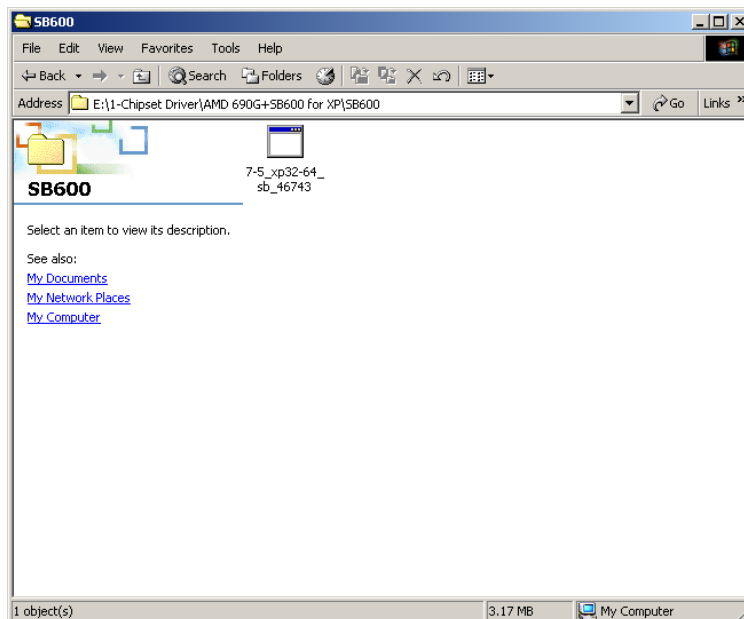

**Figure 7-5: Chipset Driver Installation License Agreement**


**Step 6:** The screen in **Figure 7-6** appears. Select the destination folder.

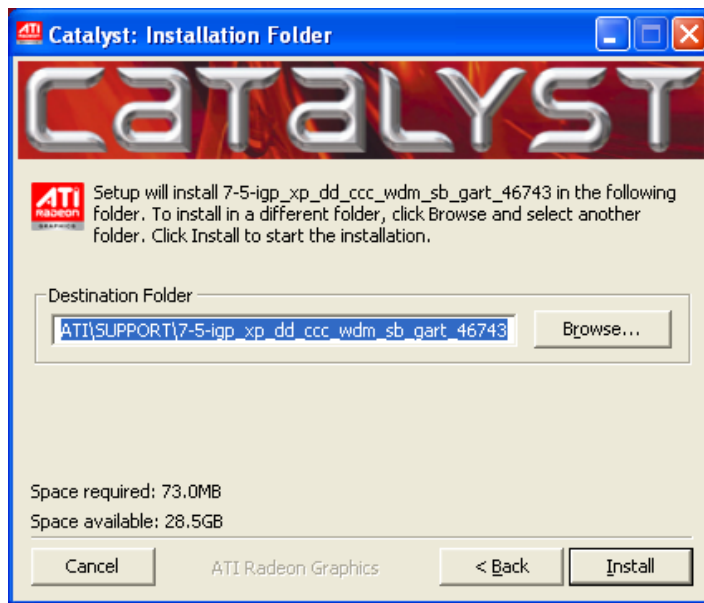

**Figure 7-6: Select Destination Folder**

**Step 7:** Click install to continue.

**Step 8:** The screen in **Figure 7-7** appears as the driver starts to install.

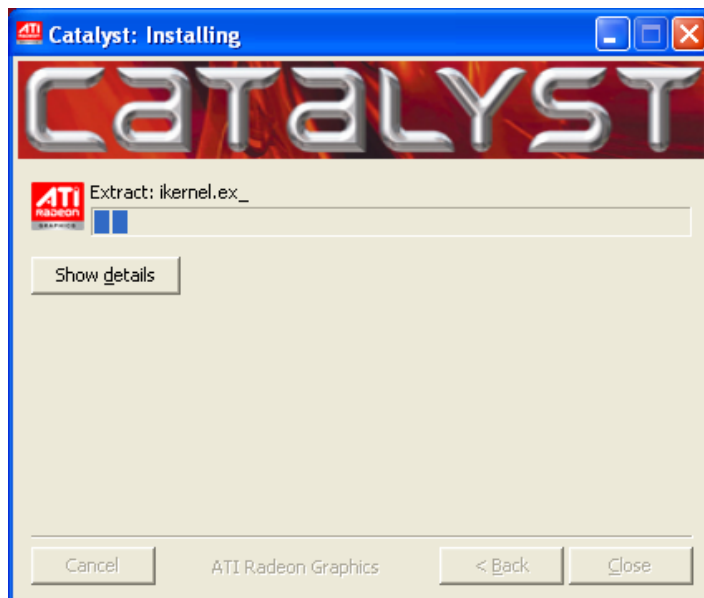

**Figure 7-7: Chipset Driver Installing Screen**

**Step 9:** The welcome screen shown in **Figure 7-8** appears.

## KINO-690AM2 Mini-ITX Motherboard

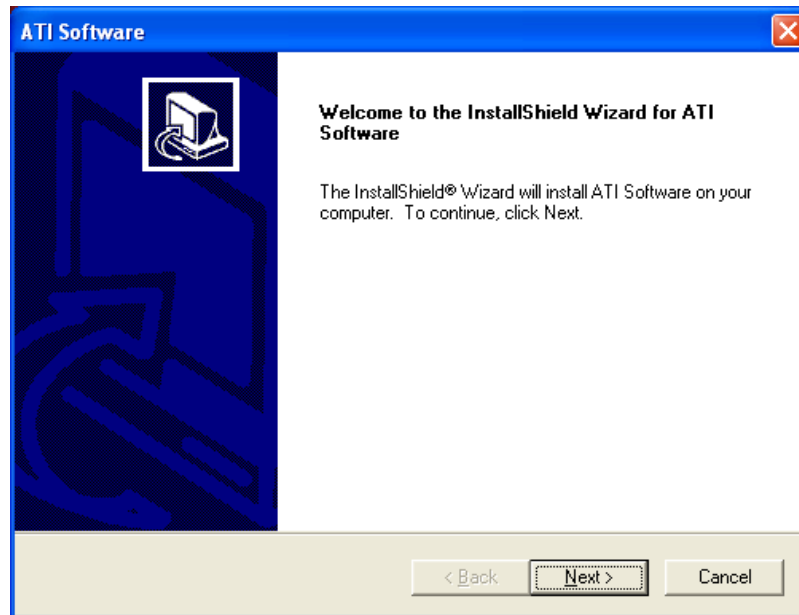


Figure 7-8: Welcome Screen

**Step 10:** Click **YES** to continue.

**Step 11:** The License agreement file in Figure 7-9 appears.


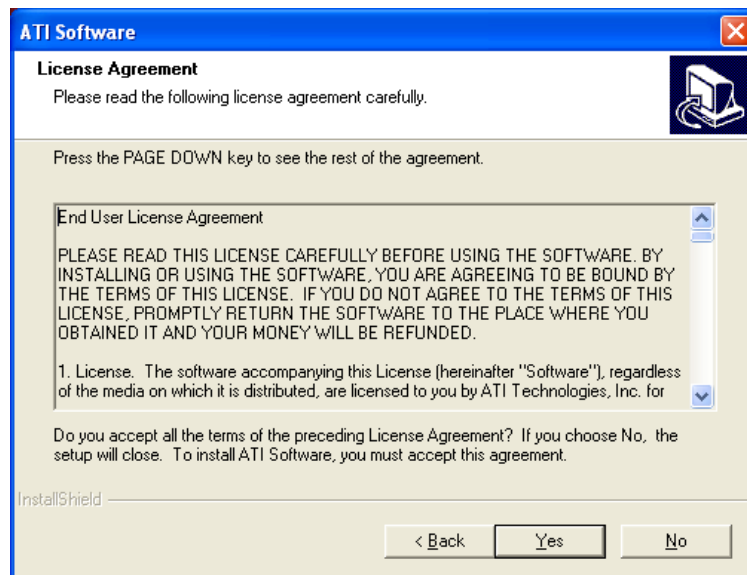


Figure 7-9: Chipset Driver Readme File Information

**Step 12:** Click **YES** to continue.

**Step 13:** The screen in **Figure 7-10** appears.

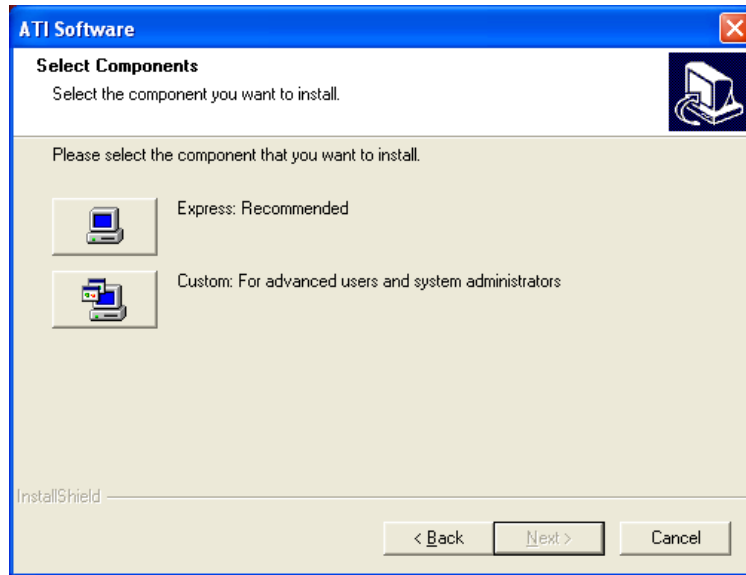

**Figure 7-10: Chipset Driver Installation Complete**

**Step 14:** Select the installation type (Express or Custom) then click Next to continue.

**Step 15:** The installer starts to load the display driver.

**Step 16:** Next the WDM Capture drivers load (for VIVO or All-In-Wonder)

**Step 17:** The Catalyst Control Center setup starts shortly after.

**Step 18:** A dialog box indicates the install progress.

**Step 19:** When the installation is complete the **Setup Complete** screen in **Figure 7-11** appears.

## KINO-690AM2 Mini-ITX Motherboard

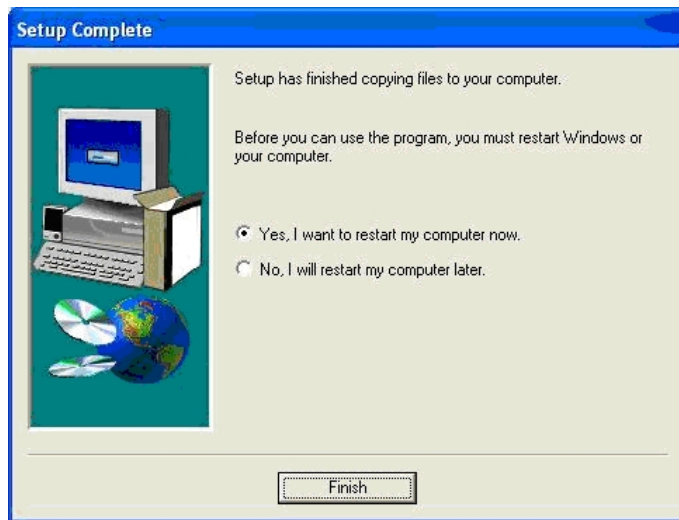


Figure 7-11: Setup Complete


**Step 20:** To complete the installation, click **Finish**.

### 7.4 Broadcom LAN Driver (for GbE LAN) Installation

To install the Broadcom LAN driver, please follow the steps below.

**Step 1:** Open **Windows Control Panel** (Figure 7-12).




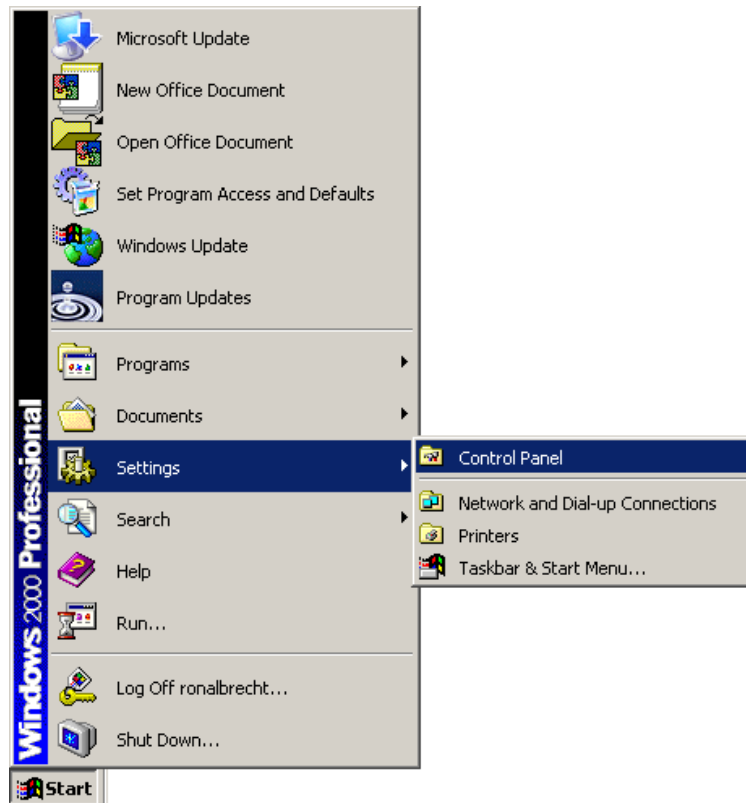

**Figure 7-12: Windows Control Panel**


**Step 2:** Double-click the **System** icon.

## KINO-690AM2 Mini-ITX Motherboard

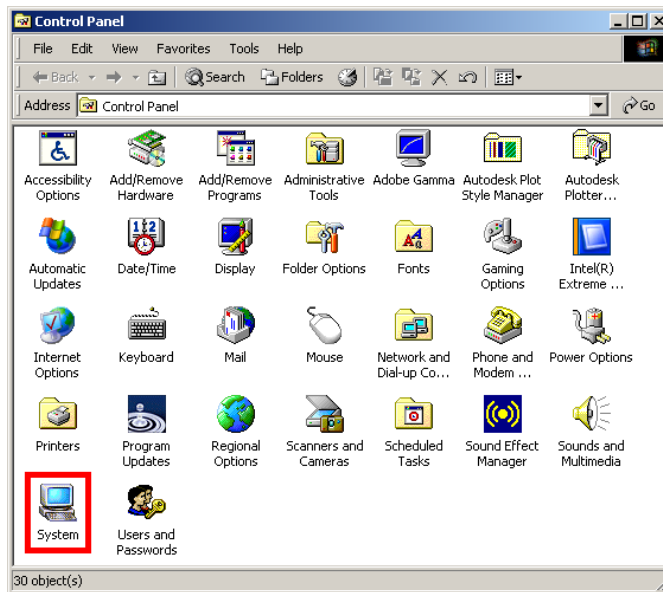


**Figure 7-13: System Icon**

**Step 3:** Click the **Device Manager** tab (Figure 7-14).

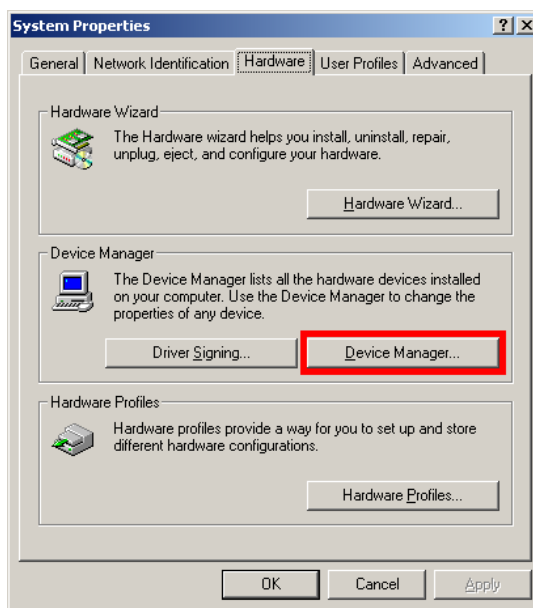

**Figure 7-14: Device Manager Tab**

**Step 4:** A list of system hardware devices appears (Figure 7-15).

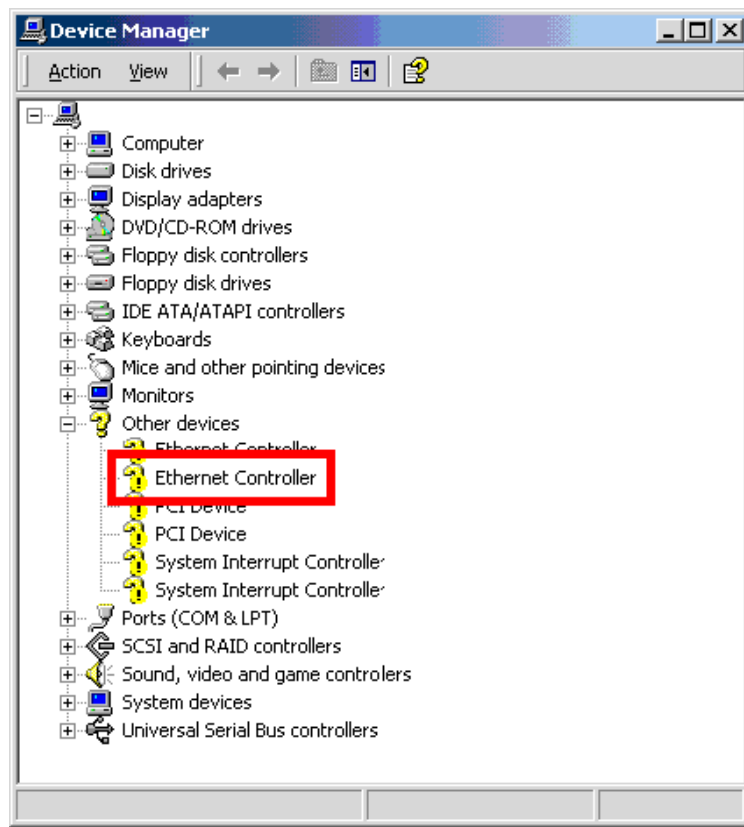

**Figure 7-15: Device Manager List**

**Step 5:** Double-click the listed device that has question marks next to it (this means Windows does not recognize the device).

**Step 6:** The **Device Driver Wizard** appears (**Figure 7-16**).

## KINO-690AM2 Mini-ITX Motherboard



Figure 7-16: Search for Suitable Driver

**Step 7:** Select “**Search for a suitable driver for my device (recommended),**” and click **NEXT** to continue.

**Step 8:** Select “**Specify a Location**” in the **Locate Driver Files** window (Figure 7-18).

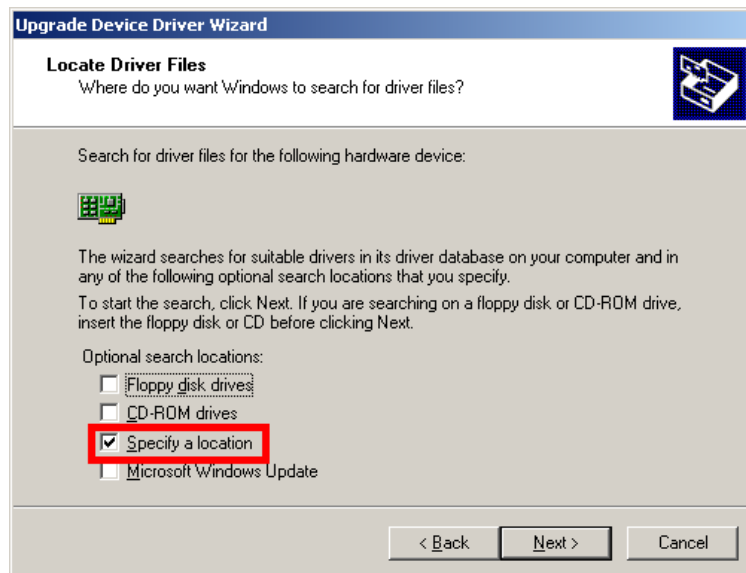


Figure 7-17: Locate Driver Files

**Step 9:** Click **NEXT** to continue.

**Step 10:** The **Locate File** window appears (Figure 7-18).



**Figure 7-18: Location Browsing Window**

**Step 11:** Select the proper OS folder under the “**X:\3-LAN\BROADCOM BCM57xx Drivers**” directory in the **Locate File** window, where “**X:\**” is the system CD drive.

**Step 12:** Click **OPEN** and the driver is installed.

## 7.5 Realtek AC`97 Audio Driver (ALC655) Installation

To install the Realtek AC `97 audio driver, please follow the steps below.

### 7.5.1 BIOS Setup

**Step 1:** Enter the BIOS setup. To do this, reboot the system and press **DEL** during POST.

**Step 2:** Go to the Southbridge Configuration menu. Set the **Audio Controller** option to [AC`97].

**Step 3:** Press **F10** to save the changes and exit the BIOS setup. The system reboots.

### 7.5.2 Driver Installation


To install the audio driver please follow the steps below.

**Step 1:** Select **AUDIO** from the list in **Figure 7-2**.

**Step 2:** A new window opens (Figure 7-19).




## KINO-690AM2 Mini-ITX Motherboard

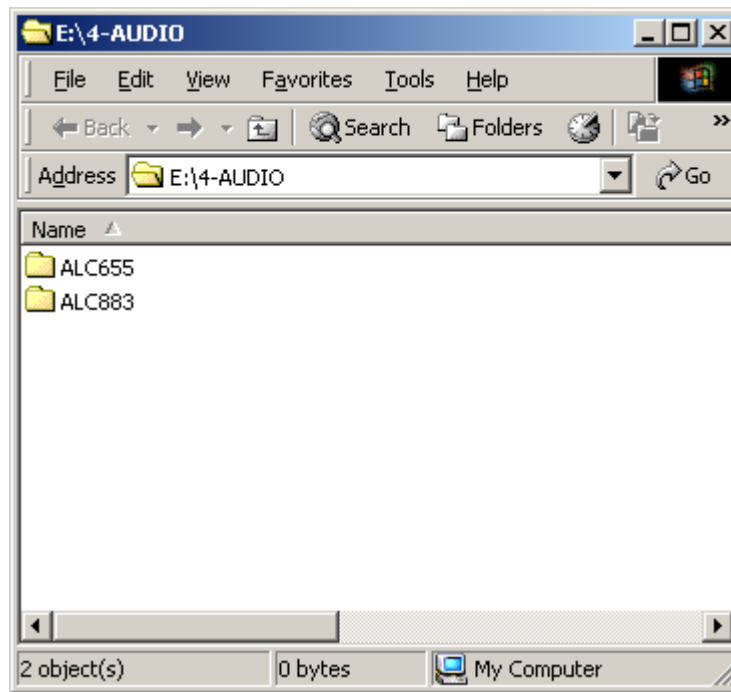

**Figure 7-19: Select the Audio CODEC**


**Step 3:** Double-click the ALC655 folder.

**Step 4:** Double-click the **Setup.exe** program icon in Figure 7-20.

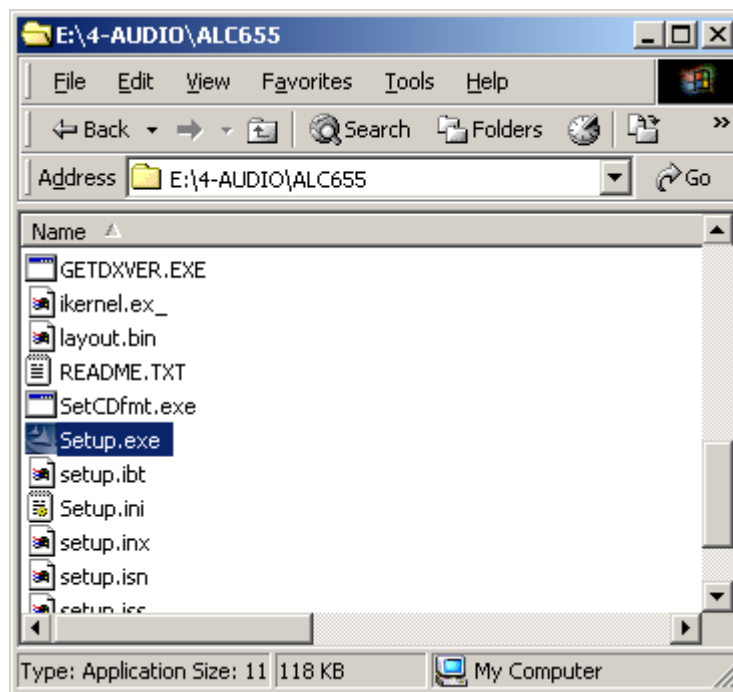

**Figure 7-20: Locate the Setup Program Icon**

**Step 5:** The **InstallShield Wizard** is prepared to guide the user through the rest of the process (Figure 7-21).

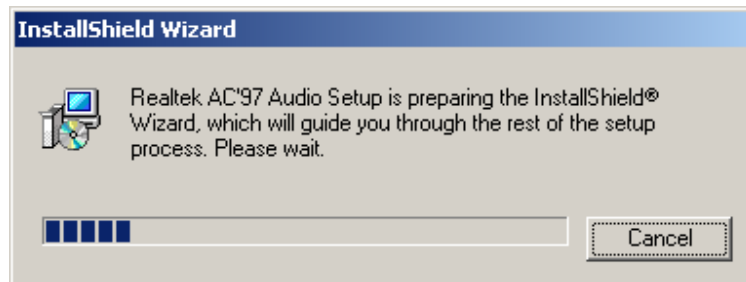

**Figure 7-21: Preparing Setup Screen**

**Step 6:** Once initialized, the **InstallShield Wizard** welcome screen appears (Figure 7-22).

## KINO-690AM2 Mini-ITX Motherboard

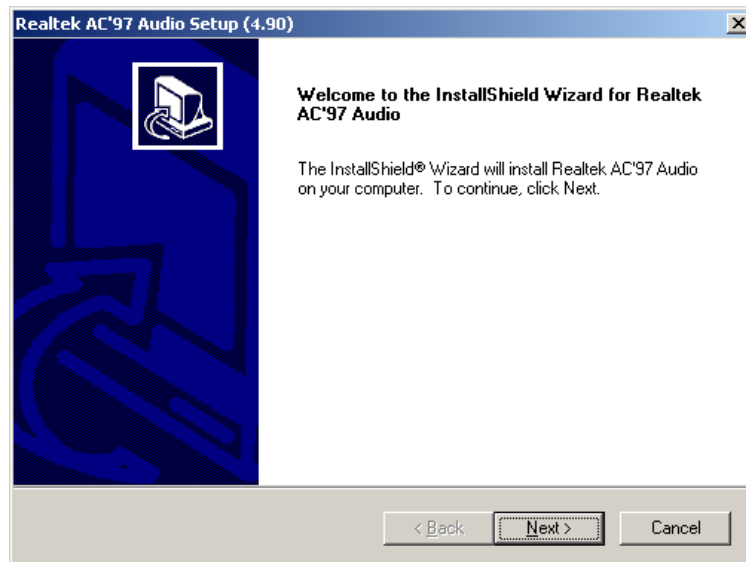


Figure 7-22: InstallShield Wizard Welcome Screen

**Step 7:** Click **NEXT** to continue the installation.

**Step 8:** InstallShield starts to install the new software as shown in Figure 7-23.


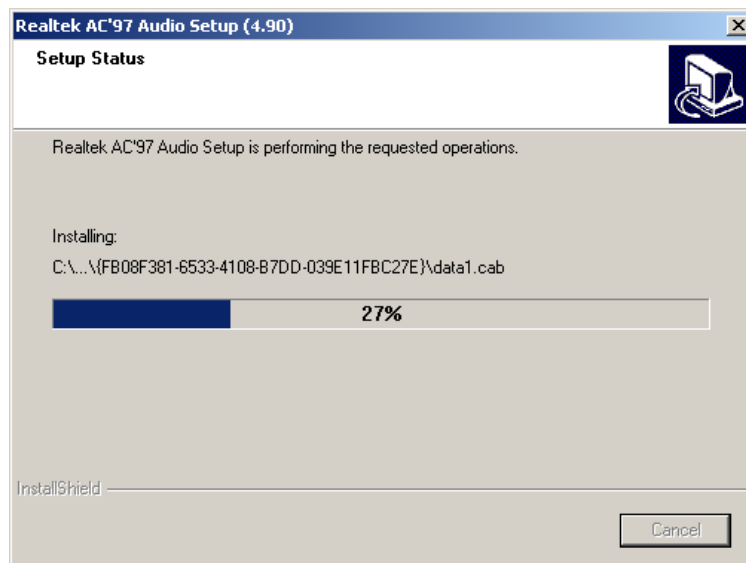



Figure 7-23: Audio Driver Software Configuration

**Step 9:** At this stage the **Digital Signal Not Found** screen shown in Figure 7-24 appears.

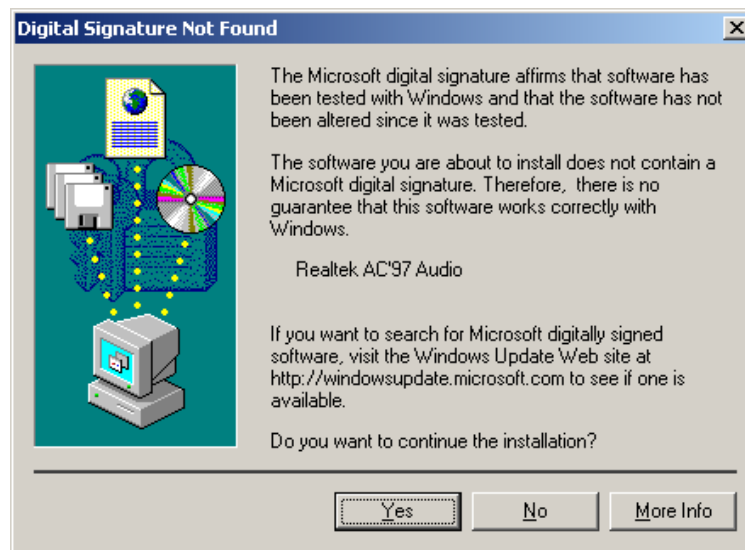

**Figure 7-24: Audio Driver Digital Signal**

**Step 10:** Click **YES** and the driver installation begins (Figure 7-25).

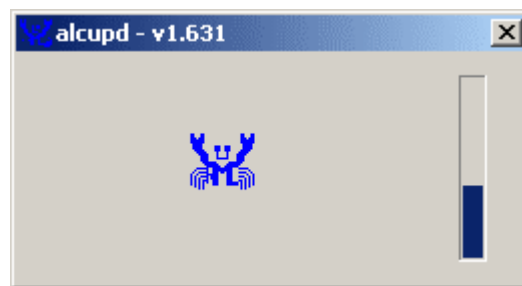

**Figure 7-25: Audio Driver Installation**

**Step 11:** After the driver installation process is complete, a confirmation screen appears (Figure 7-26).

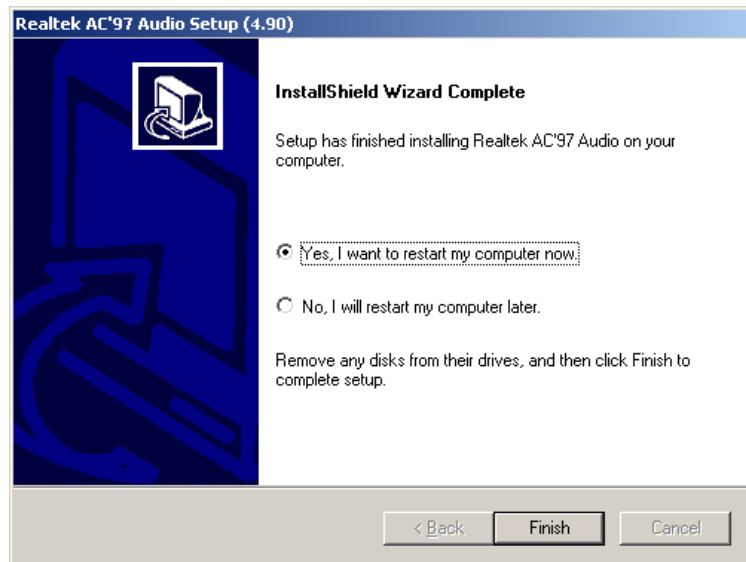


Figure 7-26: Restart the Computer

**Step 12:** The confirmation screen offers the option of restarting the computer now or later.

For the settings to take effect, the computer must be restarted. Click **FINISH** to restart the computer.


## 7.6 WebPAM RAID Utility Driver Installation

To install the AMD® Matrix Storage Manager driver, please follow the steps below:

**Step 1:** Select **Chipset** from the list in **Figure 7-2**.

**Step 2:** A new window opens (**Figure 7-27**).




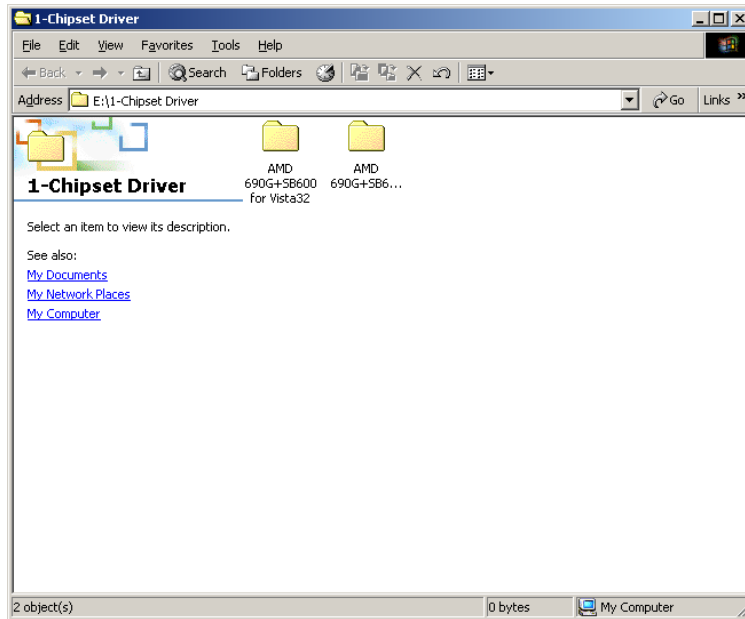

**Figure 7-27: Chipset Driver Installation Program**

**Step 3:** Double-click the directory icon for the operating system that is running on the system.

**Step 4:** The screen in **Figure 7-28** appears.

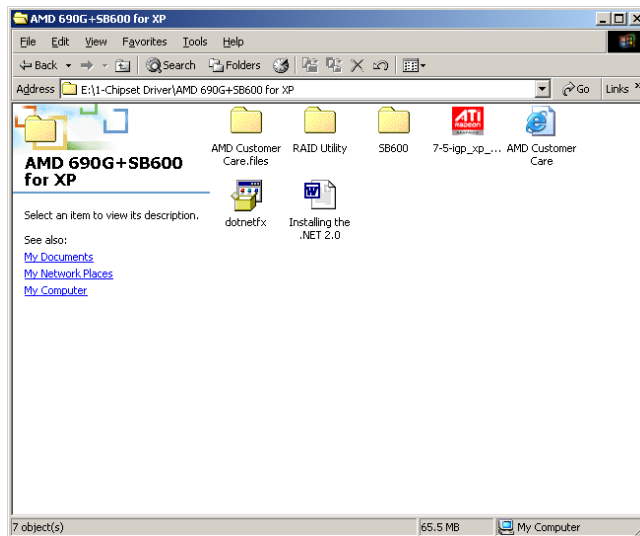


**Figure 7-28: Chipset Drivers**

**Step 5:** Open the **RAID Utility** from directory in **Figure 7-28**.

## KINO-690AM2 Mini-ITX Motherboard


**Step 6:** A new window opens (Figure 7-29).

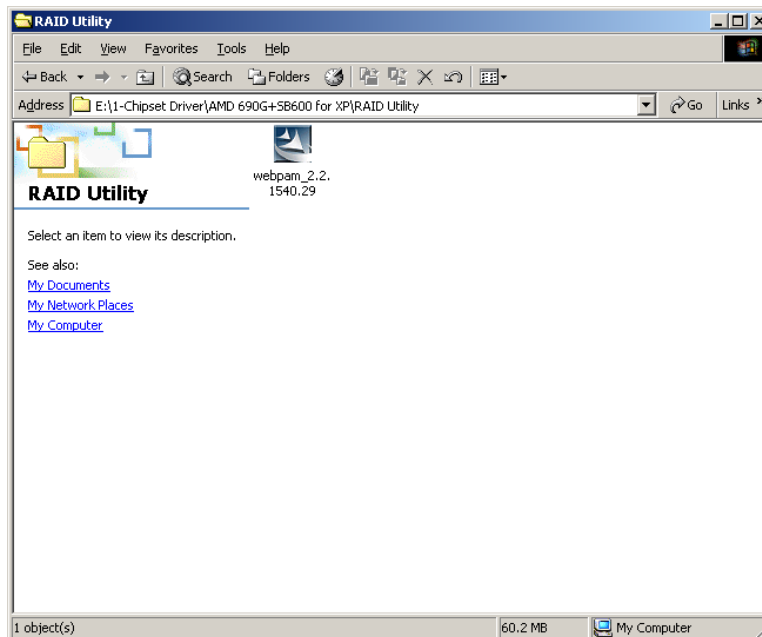

**Figure 7-29: RAID Utility Icon**


**Step 7:** Double-click the Icon Figure 7-29.

**Step 8:** The RAID Utility installation procedure is initiated as shown in Figure 7-30.

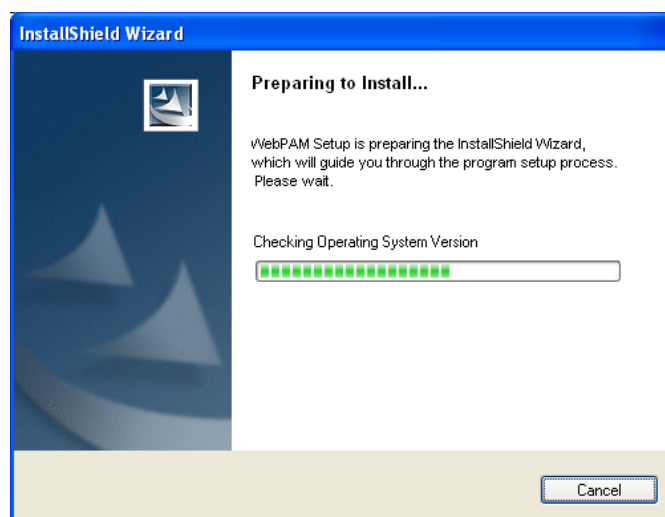

**Figure 7-30: SATA RAID Setup Program Icon**


**Step 9:** The welcome screen in Figure 7-31 appears.

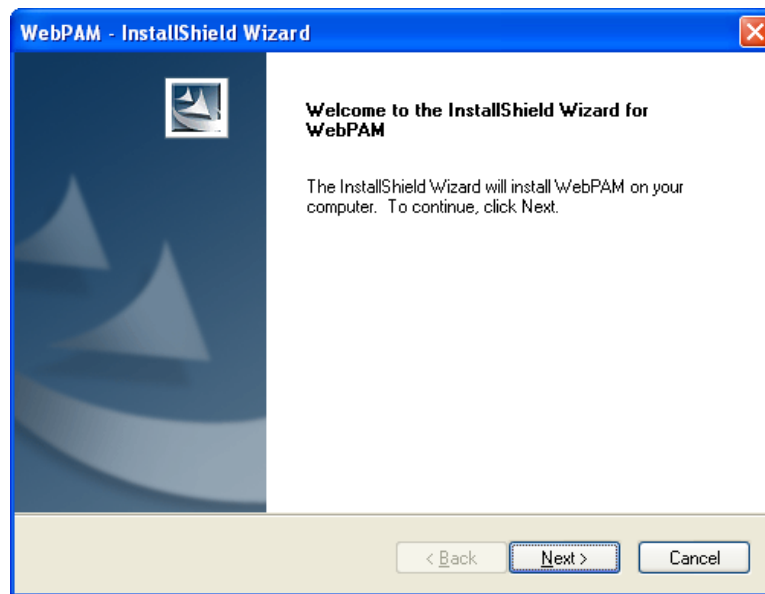

**Figure 7-31: Welcome Screen**

**Step 10:** Click **Next** to continue.

**Step 11:** The license agreement shown in **Figure 7-32** appears.

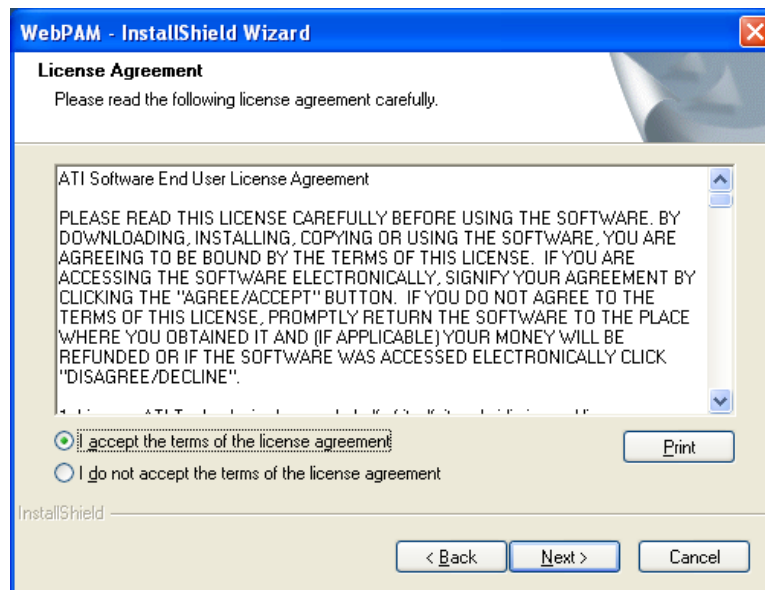


**Figure 7-32: WebPAM License Agreement**

**Step 12:** Click **Next** to continue.

## KINO-690AM2 Mini-ITX Motherboard


**Step 13:** The screen in **Figure 7-33** appears.

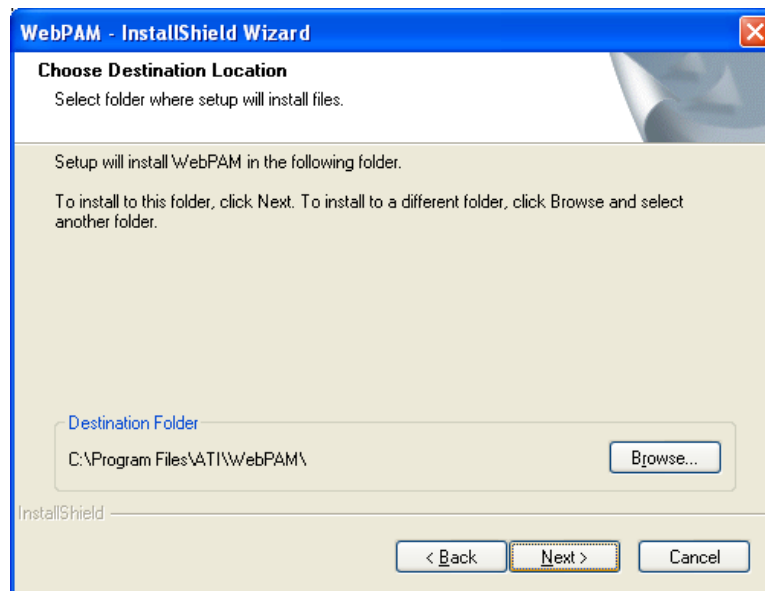

**Figure 7-33: Select WebPAM Installation Destination**

**Step 14:** Select the destination for the WebPAM. Click **NEXT** to continue.


**Step 15:** The Ready to Install Program screen in **Figure 7-34** appears.

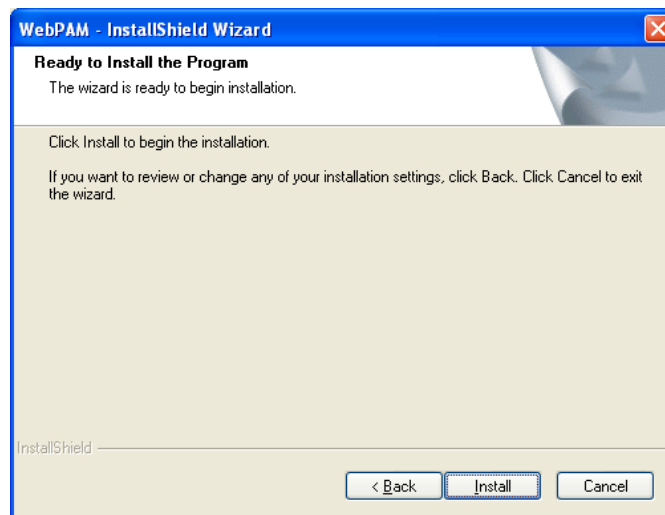

**Figure 7-34: WebPAM Ready to Install**


**Step 16:** Click **Install**.

**Step 17:** The WebPAM program begins to install as shown in **Figure 7-35**.

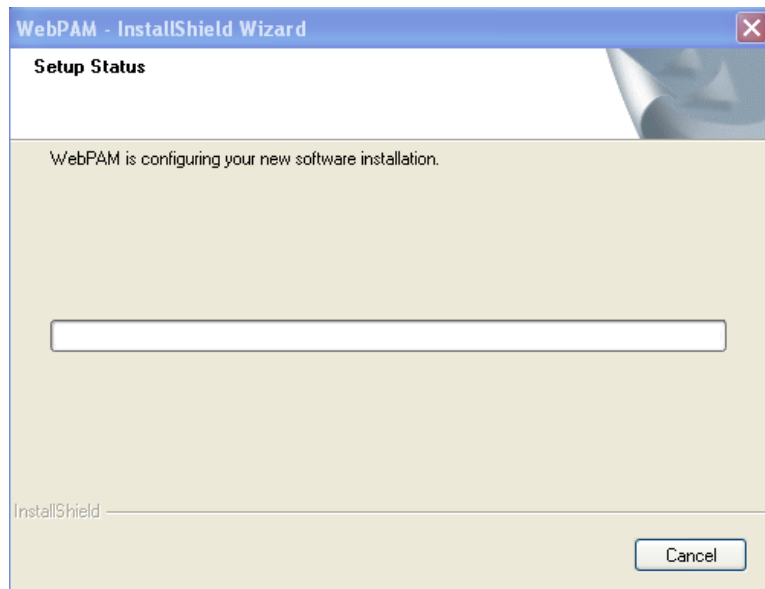

**Figure 7-35: WebPAM Installation**

**Step 18:** The Installation complete screen in **Figure 7-36** appears.

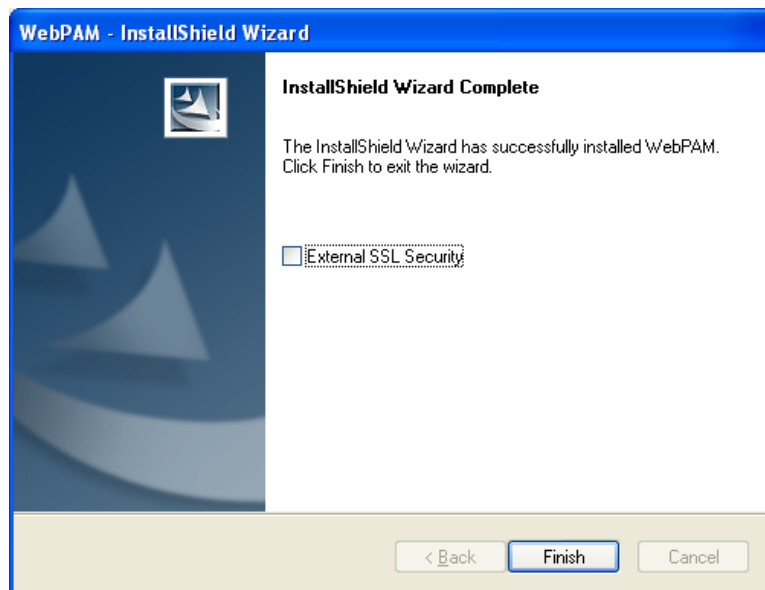

**Figure 7-36: WebPAM Installation Complete**

**Step 19:** Click **Finish** to complete WebPAM installation.



Appendix

A

# BIOS Options

---

System Overview .....	102
System Time [xx:xx:xx] .....	103
System Date [xx/xx/xx] .....	103
OnBoard PCI IDE Controller [Primary].....	106
DE Master and IDE Slave.....	107
Auto-Detected Drive Parameters.....	108
Type [Auto] .....	109
ZIP .....	109
LS-120.....	109
LBA/Large Mode [Auto].....	110
Block (Multi Sector Transfer) [Auto] .....	110
PIO Mode [Auto] .....	110
DMA Mode [Auto] .....	111
S.M.A.R.T [Auto].....	112
32Bit Data Transfer [Enabled].....	112
Serial Port1 Address [3F8/IRQ4].....	113
Serial Port1 Mode [Normal].....	114
Serial Port2 Address [2F8/IRQ3].....	114
Serial Port2 Mode [Normal].....	114
Serial Port3 Address [3E8].....	115
Serial Port3 IRQ [11] .....	115
Use RS422/RS485 [RS485] RS422 .....	115
Serial Port4 Address [2E8].....	115
Serial Port4 IRQ [5] .....	116
Suspend Mode [S1 (POS)].....	118
TCG/TPM Support [No] .....	119
Clearing the TPM [Press Enter] .....	120
Remote Access [Disabled] .....	120
Serial Port Number.....	121
Serial Port Mode.....	121
Flow Control .....	121

## KINO-690AM2 Mini-ITX Motherboard

Redirection after BIOS POST .....	121
Terminal Type .....	121
VT-UTF8 Combo Key Support .....	121
Sredir Memory Display Delay .....	121
Serial Port Number [COM1] .....	121
Base Address, IRQ [3F8h,4] .....	121
Serial Port Mode [115200 8,n,1] .....	121
Flow Control [None] .....	122
Redirection After BIOS POST [Always] .....	122
Terminal Type [ANSI] .....	123
VT-UTF8 Combo Key Support [Enabled] .....	123
Sredir Memory Display Delay [No Delay] .....	123
USB 1.1 OHCI Controller [Enabled] .....	124
USB 2.0 EHCI Controller [Enabled] .....	124
Legacy USB Support [Auto] .....	125
USB2.0 Controller Mode [HiSpeed] .....	125
Clear NVRAM [No] .....	127
Plug & Play O/S [No] .....	127
PCI Latency Timer [64] .....	128
Allocate IRQ to PCI VGA [Yes] .....	128
Palette Snooping [Disabled] .....	128
PCI IDE BusMaster [Enabled] .....	129
OffBoard PCI/ISA IDE Card [Auto] .....	129
IRQ# [Available] .....	130
DMA Channel# [Available] .....	131
Reserved Memory Size [Disabled] .....	131
Quick Boot [Enabled] .....	133
Quiet Boot [Disabled] .....	133
AddOn ROM Display Mode [Force BIOS] .....	134
Bootup Num-Lock [On] .....	134
Boot From LAN Support [Disabled] .....	134

Change Supervisor Password .....	135
Change User Password .....	136
DRAM ECC Enable [Enabled] .....	139
4-Bit ECC Mode [Disabled] .....	139
DRAM SCRUB REDIRECT [Disabled] .....	140
DRAM BG Scrub [Disabled] .....	140
L2 Cache BG Scrub [Disabled] .....	140
L1 Cache BG Scrub [Disabled] .....	141
Internal Graphics Mode [UMA] .....	141
UMA Frame Buffer Size [Auto] .....	142
Current UMA Buffer Size [128MB] .....	142
Primary Video Controller [IGFX] .....	142
TV Standard .....	143
AC97 Audio Device [Auto] .....	144
Set Spread Spectrum Function [Disabled] .....	144
OnChip SATA Channel [Enabled] .....	144
OnChip SATA Type [Native IDE] .....	145
AT/ATX Power [ATX power] .....	146
Power Button Mode [On/Off] .....	146
Restore on AC Power Loss [Last State] .....	147
RTC Resume [Disabled] .....	147
RTC Alarm Date (Days) .....	147
RTC Alarm Time (HH:MM:SS) .....	147
Save Changes and Exit .....	148
Discard Changes and Exit .....	148
Discard Changes .....	148
Load Optimal Defaults .....	149
Load Failsafe Defaults .....	149

Appendix

**B**

# DIO Interface

---



## B.1 DIO Interface Introduction

The DIO connector on the KINO-690AM2 is interfaced to GIO ports on the iTE Super I/O chipset. The DIO has both 4-bit digital inputs and 4-bit digital outputs. The digital inputs and digital outputs are generally control signals that control the on/off circuit of external devices or TTL devices. Data can be read or written to the selected address to enable the DIO functions.



### **NOTE:**

For further information, please refer to the datasheet for the iTE Super I/O chipset.

## B.2 DIO Connector Pinouts

The following table describes how the DIO connector pins are connected to the Super I/O GPIO port 1.

Pin	Description	Super I/O Pin	Super I/O Pin Description
1	Ground	N/A	N/A
2	VCC	N/A	N/A
3	XIN0	27 (GP20)	General purpose I/O port 2 bit 0.
4	XOUT0	23 (GP24)	General purpose I/O port 2 bit 4.
5	XIN1	26 (GP21)	General purpose I/O port 2 bit 1.
6	XOUT1	22 (GP25)	General purpose I/O port 2 bit 5.
7	XIN2	25 (GP22)	General purpose I/O port 2 bit 3.
8	XOUT2	21 (GP26)	General purpose I/O port 2 bit 2.
9	XIN3	24 (GP23)	General purpose I/O port 2 bit 6.
10	XOUT3	20 (GP27)	General purpose I/O port 2 bit 7.

## KINO-690AM2 Mini-ITX Motherboard

### B.3 Assembly Language Samples

#### B.3.1 Enable the DIO Input Function

The BIOS interrupt call INT 15H controls the digital I/O. An assembly program to enable digital I/O input functions is listed below.

MOV	AX, 6F08H	Sets the digital port as input
INT	15H	Initiates the INT 15H BIOS call

#### B.3.2 Enable the DIO Output Function

The BIOS interrupt call INT 15H controls the digital I/O. An assembly program to enable digital I/O output functions is listed below.

MOV	AX, 6F09H	Sets the digital port as output
MOV	BL, 09H	
INT	15H	Initiates the INT 15H BIOS call



**THIS PAGE IS INTENTIONALLY LEFT BLANK**

Appendix

C

# Watchdog Timer

---


**NOTE:**

The following discussion applies to DOS environment. IEI support is contacted or the IEI website visited for specific drivers for more sophisticated operating systems, e.g., Windows and Linux.

The Watchdog Timer is provided to ensure that standalone systems can always recover from catastrophic conditions that cause the CPU to crash. This condition may have occurred by external EMI or a software bug. When the CPU stops working correctly, Watchdog Timer either performs a hardware reset (cold boot) or a Non-Maskable Interrupt (NMI) to bring the system back to a known state.

A BIOS function call (INT 15H) is used to control the Watchdog Timer:

**INT 15H:**

<b>AH – 6FH Sub-function:</b>	
AL – 2:	Sets the Watchdog Timer's period.
BL:	Time-out value (Its unit-second is dependent on the item "Watchdog Timer unit select" in CMOS setup).

**Table C-1: AH-6FH Sub-function**

Call sub-function 2 to set the time-out period of Watchdog Timer first. If the time-out value is not zero, the Watchdog Timer starts counting down. While the timer value reaches zero, the system resets. To ensure that this reset condition does not occur, calling sub-function 2 must periodically refresh the Watchdog Timer. However, the Watchdog timer is disabled if the time-out value is set to zero.

A tolerance of at least 10% must be maintained to avoid unknown routines within the operating system (DOS), such as disk I/O that can be very time-consuming.



**NOTE:**

When exiting a program it is necessary to disable the Watchdog Timer, otherwise the system resets.

**Example program:**

**; INITIAL TIMER PERIOD COUNTER**

;

W\_LOOP:

```
MOV    AX, 6F02H    ;setting the time-out value
MOV    BL, 30        ;time-out value is 48 seconds
INT     15H
```

;

**; ADD THE APPLICATION PROGRAM HERE**

;

```
CMP     EXIT_AP, 1    ;is the application over?
JNE     W_LOOP        ;No, restart the application
```

```
MOV     AX, 6F02H     ;disable Watchdog Timer
MOV     BL, 0         ;
INT     15H
```

;

**; EXIT ;**

**THIS PAGE IS INTENTIONALLY LEFT BLANK**

Appendix

**D**

# Address Mapping

---

## D.1 Address Map

I/O address Range	Description
000-01F	DMA Controller
020-021	Interrupt Controller
040-043	System time
060-06F	Keyboard Controller
070-07F	System CMOS/Real time Clock
080-09F	DMA Controller
0A0-0A1	Interrupt Controller
0C0-0DF	DMA Controller
0F0-0FF	Numeric data processor
1F0-1F7	Primary IDE Channel
2F8-2FF	Serial Port 2 (COM2)
378-37F	Parallel Printer Port 1 (LPT1)
3B0-3BB	AMD Graphics Controller
3C0-3DF	AMD Graphics Controller
3F6-3F6	Primary IDE Channel
3F7-3F7	Standard floppy disk controller
3F8-3FF	Serial Port 1 (COM1)

**Table D-1: IO Address Map**

## D.2 1st MB Memory Address Map

Memory address	Description
00000-9FFFF	System memory
A0000-BFFFF	VGA buffer
F0000-FFFFF	System BIOS
1000000-	Extend BIOS

**Table D-2: 1<sup>st</sup> MB Memory Address Map**

### D.3 IRQ Mapping Table

IRQ0	System Timer	IRQ8	RTC clock
IRQ1	Keyboard	IRQ9	ACPI
IRQ2	Available	IRQ10	LAN
IRQ3	COM2	IRQ11	LAN/USB2.0/SATA
IRQ4	COM1	IRQ12	PS/2 mouse
IRQ5	SMBus Controller	IRQ13	FPU
IRQ6	FDC	IRQ14	Primary IDE
IRQ7	Available	IRQ15	Secondary IDE

Table D-3: IRQ Mapping Table

### D.4 DMA Channel Assignments

Channel	Function
0	Available
1	Available
2	Floppy disk (8-bit transfer)
3	Available
4	Cascade for DMA controller 1
5	Available
6	Available
7	Available

Table D-4: IRQ Mapping Table





**THIS PAGE IS INTENTIONALLY LEFT BLANK**

Appendix

**E**

# Hazardous Materials Disclosure

---

## **E.1 Hazardous Material Disclosure Table for IPB Products Certified as RoHS Compliant Under 2002/95/EC Without Mercury**

The details provided in this appendix are to ensure that the product is compliant with the Peoples Republic of China (China) RoHS standards. The table below acknowledges the presences of small quantities of certain materials in the product, and is applicable to China RoHS only.

A label will be placed on each product to indicate the estimated “Environmentally Friendly Use Period” (EFUP). This is an estimate of the number of years that these substances would “not leak out or undergo abrupt change.” This product may contain replaceable sub-assemblies/components which have a shorter EFUP such as batteries and lamps. These components will be separately marked.

Please refer to the table on the next page.

## KINO-690AM2 Mini-ITX Motherboard

Part Name	Toxic or Hazardous Substances and Elements					
	Lead (Pb)	Mercury (Hg)	Cadmium (Cd)	Hexavalent Chromium (CR(VI))	Polybrominated Biphenyls (PBB)	Polybrominated Diphenyl Ethers (PBDE)
Housing	x	O	O	O	O	x
Display	X	O	O	O	O	X
Printed Circuit Board	X	O	O	O	O	X
Metal Fasteners	X	O	O	O	O	O
Cable Assembly	X	O	O	O	O	X
Fan Assembly	X	O	O	O	O	X
Power Supply Assemblies	X	O	O	O	O	X
Battery	O	O	O	O	O	O
<p>O: This toxic or hazardous substance is contained in all of the homogeneous materials for the part is below the limit requirement in SJ/T11363-2006</p> <p>X: This toxic or hazardous substance is contained in at least one of the homogeneous materials for this part is above the limit requirement in SJ/T11363-2006</p>						

此附件旨在确保本产品符合中国 RoHS 标准。以下表格标示此产品中某有毒物质的含量符合中国 RoHS 标准规定的限量要求。

本产品上会附有“环境友好使用期限”的标签，此期限是估算这些物质“不会有泄漏或突变”的年限。本产品可能包含有较短的环境友好使用期限的可替换元件，像是电池或灯管，这些元件将会单独标示出来。

部件名称	有毒有害物质或元素					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (CR(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
壳体	X	O	O	O	O	X
显示	X	O	O	O	O	X
印刷电路板	X	O	O	O	O	X
金属螺帽	X	O	O	O	O	O
电缆组装	X	O	O	O	O	X
风扇组装	X	O	O	O	O	X
电力供应组装	X	O	O	O	O	X
电池	O	O	O	O	O	O
<p>O: 表示该有毒有害物质在该部件所有物质材料中的含量均在 SJ/T11363-2006 标准规定的限量要求以下。</p> <p>X: 表示该有毒有害物质至少在该部件的某一均质材料中的含量超出 SJ/T11363-2006 标准规定的限量要求。</p>						



Appendix

E

# RAID Setup

---

## F.1 Introduction

The AMD SB600 SATA RAID control can control serial ATA (SATA) disks and increase the data read/write speed and provide protection to data by distributing mirrored duplicates of data onto two disk drives (RAID 1).



### CAUTION!

A configured RAID volume (which may consist of multiple hard drives) appears to an operating system as a contingent storage space. The operating system will not be able to distinguish the physical disk drives contained in a RAID configuration.

---

#### F.1.1 Precautions

One key benefit a RAID configuration brings is that a single hard drive can fail within a RAID array without damaging data. With RAID 1 array, a failed drive can be replaced and the RAID configuration restored.



### WARNING!

Irrecoverable data loss occurs if a working drive is removed when trying to remove a failed drive. It is strongly recommended to mark the physical connections of all SATA disk drives. Drive locations can be identified by attaching stickers to the drive bays. If a drive member of a RAID array should fail, the failed drive can then be correctly identified.

---

## KINO-690AM2 Mini-ITX Motherboard



### CAUTION!

Do not accidentally disconnect the SATA drive cables. Carefully route the cables within the chassis to avoid system down time.

## F.2 Features and Benefits

- Supports RAID levels 0, 1, and JBOD
- Supports connectivity to two disk drives
- Windows-based software for RAID management

## F.3 Accessing the AMD SB600 RAID Utility

To access the **AMD RAID Utility**, please follow the steps below:

**Step 1: Connect SATA drives to the system.** Connect at least two SATA drives to the system. Make sure the drives have the same capacity, are the same type and have the same speed.



### NOTE:


Make sure the SATA drives are EXACTLY the same when they are configured in a RAID configuration (JBOD, RAID 0 or RAID 1). If they are not the same size, disk drive capacity is sacrificed and overall performance affected.

**Step 2: Enable SATA drives in BIOS.** Start the computer and access the **AMI BIOS** setup program. Next, open the **Southbridge Setup** menu. Enable the **OnChip SATA Channel** option and change the **OnChip SATA Type** to **RAID**.

**Step 3: Save and Exit BIOS.** After the **SATA ROM Support BIOS** option is enabled, save and exit the **BIOS**.

**Step 4: Reboot the system.** Reboot the system after saving and exiting the **BIOS**.

**Step 5:** Press **Ctrl-F**. The following screen appears.

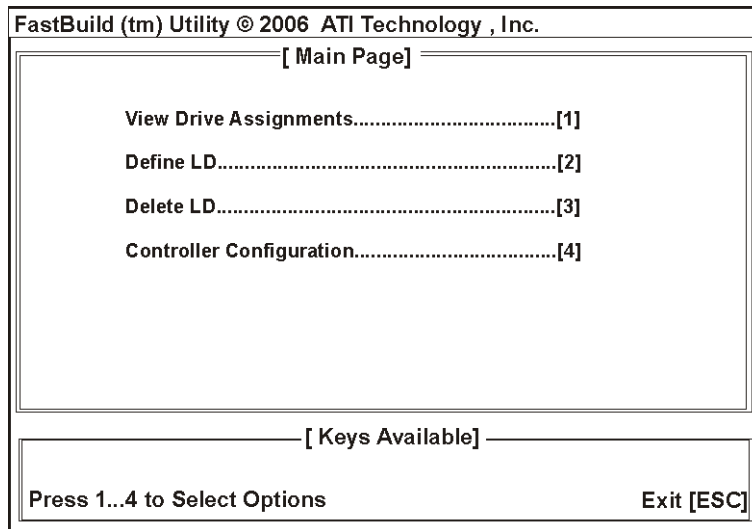

FastBuild (tm) Utility © 2006 ATI Technology , Inc.

[ Main Page ]

View Drive Assignments.....[1]  
 Define LD.....[2]  
 Delete LD.....[3]  
 Controller Configuration.....[4]


[ Keys Available ]

Press 1...4 to Select Options Exit [ESC]

**Figure F-1: Accessing AMD RAID BIOS Utility**

**Step 6:** Delete RAID settings and partitions. Select **Delete LD** by pressing **3** in the **Main Page** menu above. Next, delete the drives individually.

**Step 7:** Define the Logical Drive (LD). Select **Define LD** by pressing **2** in the **Main Page** menu above.

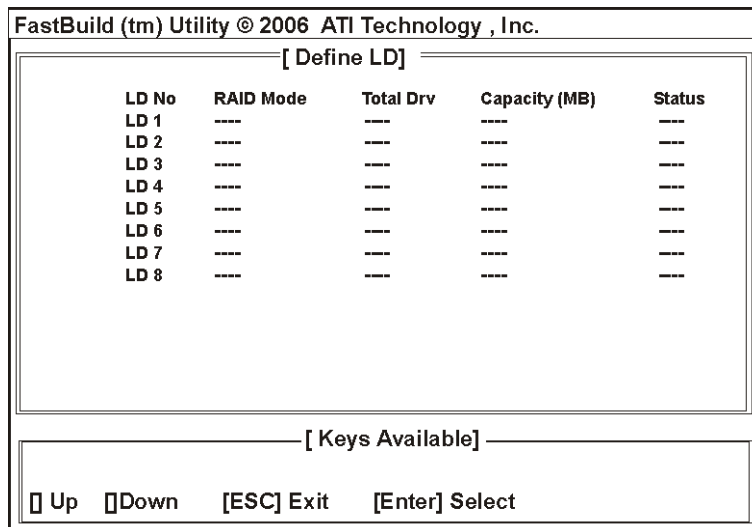

FastBuild (tm) Utility © 2006 ATI Technology , Inc.

[ Define LD ]

LD No	RAID Mode	Total Drv	Capacity (MB)	Status
LD 1	----	----	----	----
LD 2	----	----	----	----
LD 3	----	----	----	----
LD 4	----	----	----	----
LD 5	----	----	----	----
LD 6	----	----	----	----
LD 7	----	----	----	----
LD 8	----	----	----	----

[ Keys Available ]

**Figure F-2: Define LD**

**Step 8:** The **RAID Configuration Options** screen shown below appears.

## KINO-690AM2 Mini-ITX Motherboard

FastBuild (tm) Utility © 2006 ATI Technology , Inc.

[ Define LD ]

LD No	RAID Mode	Total Drv
LD 1	RAID 1	0

Stripe Block: 64KB  
Gigabyte Boundary: ON

Fast Init.: OFF  
Cache Mode: WriteThru

[ Drives Assignment ]

Channel ID	Drive Model	Capacity (MB)	Assignment
1: Mass	xxxxxxxxxx	yyy	N
2: Mass	xxxxxxxxxx	yyy	N
3: Mass	xxxxxxxxxx	yyy	N
4: Mass	xxxxxxxxxx	yyy	N

[ Keys Available ]

☐ Up   
 ☐ Down   
 [ESC] Exit   
 [Space] Change Option   
 [Ctrl-Y] Save

**Figure F-3: RAID Configuration Options**

**Step 9: Configure the RAID.** Use the configuration options in the **RAID Configuration Options** menu shown above to configure the RAID.

**Step 10: Select the RAID Mode.** The following RAID configuration options are available.

- JBOD
- RAID 0
- RAID 1
- RAID 10

**Step 11: Select the stripe block.** If necessary, select the stripe block.

**Step 12: Select the drives.** For a logical drive, at least two drives must be selected.


**Step 13: Select the Capacity.** For each drive, select the capacity of the drive that should be allocated to the logical drive.

**Step 14: Assign the drive.** For each drive, select "Y" in the assignment option.

**Step 15: Save.** Press "Ctrl-Y" to save the RAID configuration settings.

**Step 16:** The **LD Define** screen reappears with the newly configured LD showing.



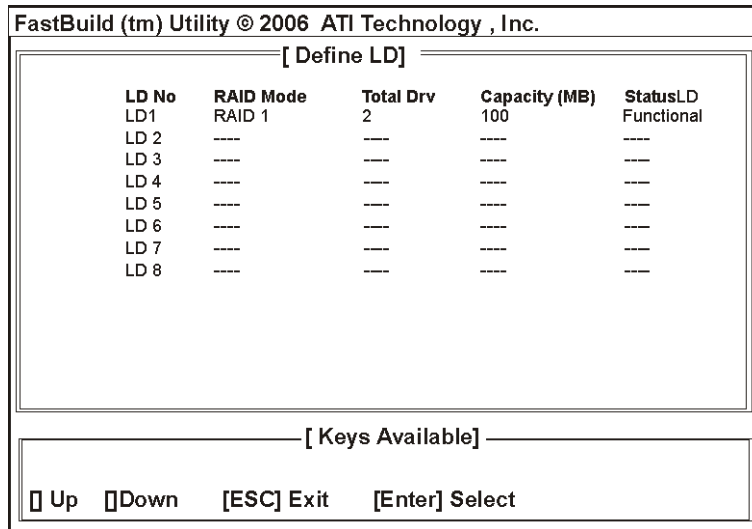

**Figure F-4: RAID Configuration Options**

**Step 17: Exit the Define LD screen.** To exit, press “**Escape**.” The **Main Menu** reappears.

**Step 18: Exit the Main Menu and reboot.** When exiting the main menu, a prompt appears asking if the user wishes to reboot the system. Press “**Y**” to continue.

**Step 19: The system starts to reboot.**

**Step 20: Install the OS.** After the RAID array has been configured install the OS. To do this, please refer to the documentation that came with the OS.

# Index

---

## A

ACPI .....	103, 118
airflow .....	83
AMD Socket AM2 CPU	
installation.....	74
anti-static precautions.....	34, 70
anti-static pad .....	34, 70
anti-static wristband.....	34, 70
handling.....	34, 70
self-grounding.....	34, 70
ASKIR interface .....	48
ATA flat cable .....	84
ATX .....	43
ATX power connector .....	4, 43
audio connector .....	62
audio connector, external .....	63
Audio device connector .....	91
audio devices, external.....	63
audio jack.....	62
audio jack.....	63

## B

BIOS 26, 100, 101, 102, 103, 104, 105, 106, 107, 108, 113, 116, 117, 118, 119, 120, 122, 124, 126, 127, 132, 133, 134, 135, 136, 137, 138, 143, 144, 146, 148	
BIOS chipset.....	26

## C

cables .....	84
ATA 66/100 flat cable.....	35

dual port USB .....	88
dual RS-232.....	35, 85
four port USB .....	89
SATA drive .....	36, 86
SATA drive power .....	36, 86
chassis .....	83
installation.....	83
chipset driver.....	154
clear CMOS jumper .....	5, 79, 80
location .....	80
settings .....	80
CMOS .....	79
clear CMOS jumper .....	79
COM 2.....	55
connector location and pinouts.....	55
RS-232, RS-422 or RS-485.....	55
COM 2 function select jumper .....	55
COM 3	
COM 3 function select .....	81
COM 3 function select jumper .....	81
location .....	81
settings .....	81
connectors, external	
audio jacks.....	62
COM 1 serial port .....	67
DVI connector.....	63
keyboard PS/2 connector .....	65
mouse PS/2 connector .....	65
connectors, pinouts and location	
ATX power .....	42
COM 2 serial port .....	55, 56
fan.....	44
front panel.....	45
IDE.....	47

## KINO-690AM2 Mini-ITX Motherboard

infrared interface .....	48
PCI Express x1 slot .....	52
PCI slot .....	49
serial port (COM 2) .....	55, 56
trusted platform module (TPM) .....	58
TV out .....	59
USB (internal) .....	60
cooling .....	83
airflow .....	83
cooling fan .....	44, 76, 117
cooling kit installation .....	76
CPU	
cooling fan .....	76
heat sink .....	76
installation .....	74

### D

DB-15 connector .....	96
DB-9 connector .....	94
digital input/output connector .....	44
location and pinouts .....	44
dimensions .....	10
board .....	10
external peripheral interface connector	
panel .....	11
DIMM .....	77
installation .....	77
specifications .....	77
Drivers	
Broadcom GbE LAN .....	159
Realtek AC`97 Audio - ALC655 .....	164
dual port USB cable .....	88
DVI .....	91

DVI connector .....	63
DVI connector .....	5, 63
DVI Display Device .....	91
connection .....	91
DVI-I connector .....	91

### E

electrostatic discharge .....	34, 70
Enhanced Hardware Monitor .....	28
Ethernet .....	90
RJ-45 cable connector .....	90
RJ-45 connector .....	4
Ethernet controllers .....	66
external indicators .....	45
external peripheral interface .....	90
connection .....	90
connectors .....	90
external switches .....	45

### F

fan connector .....	4, 44
location and pinouts .....	44
fan speed controller .....	28
four port USB cable .....	89
front panel connector .....	4, 45
location and pinouts .....	45

### H

hard disk drives	
SATA .....	54
heat sink .....	76

## KINO-690AM2 Mini-ITX Motherboard

### I

IDE connector, 40-pin .....	4, 47
location and pinouts .....	47
IDE device .....	84
ATA flat cable.....	84
connector.....	84
infrared interface.....	48
Amplitude Shift Key Infrared.....	48
ASKIR.....	48
Serial Infrared.....	48
SIR.....	48
infrared interface connector.....	4, 48
location and pinouts .....	48
installation checklist.....	72
<b>IrDA</b> .....	114, 115

### J

jumper .....	79
clear CMOS .....	79
COM 3 function select.....	81
jumper configuration.....	79
jumper settings .....	79
RS-422 Termination.....	82

### K

keyboard connector .....	65
keyboard connector .....	65
keyboard controller .....	28

### L

LAN connection .....	92
LPC bus .....	26

LPC Bus.....	26
LPC interface .....	21, 28

### M

memory module installation .....	77
motherboard.....	84
installation.....	84
mouse connector .....	65

### P

PCI Express x1 Slot.....	53
location and pinouts.....	53
PCI interface .....	18
PCI slot .....	4, 49
location and pinouts.....	49
PCIe slot .....	4
peripheral connectors .....	42
peripheral device cables .....	84
power button .....	46
Power Button Mode .....	146
PS/2 connector .....	65
PS/2 connector .....	5, 65
PS/2 keyboard and mouse connection .....	93

### R

RAID .....	54
RAID Accessing the ALi RAID Utility.....	197
Features and Benefits .....	197
Precautions.....	196
real time clock.....	25
RJ-45 connection.....	92



## KINO-690AM2 Mini-ITX Motherboard

single connector .....	92
RJ-45 Ethernet connector.....	4, 67
RJ-45 LAN connectors .....	66
RS-232.....	55, 56, 57, 68, 85
cable connection .....	85
COM 1 location and pinouts.....	68
COM 2 location and pinouts.....	55, 57
COM 3 location and pinouts.....	55
COM 4 location and pinouts.....	55
connector location and pinouts..	55, 57, 68
dual cable .....	85
serial port devices .....	57
RS-232 serial port connector.....	4
RS-232 serial port devices .....	57
RS-232/422/485 serial port connector.....	4
RS-422.....	55
COM 2 location and pinouts.....	55
RS-422 Termination jumper.....	82
RS-485.....	55, 56
COM 2 location and pinouts.....	55

### S

SATA	
controller.....	21
SATA drive .....	86
cables .....	86
connection .....	86
power cable .....	86
SATA drive connector .....	4, 54
location and pinouts .....	54
SATA drives.....	54
Serial Device	
connection .....	94
serial port .....	67

serial port connector .....	55, 57, 68
location and pinouts.....	55, 57, 68
serial ports .....	28
SIR interface .....	48
Socket AM2 CPU	
cooling kit.....	76
cooling kit installation.....	76
Super I/O chipset .....	27
system voltages .....	116, 117

### T

technical specifications .....	5
temperature.....	116
TPM connector.....	4
trusted platform module .....	59
trusted platform module (TPM) connector ..	59
location and pinouts.....	59
TV out connector.....	60
location and pinouts.....	60
TV Out connector.....	4

### U

unpacking.....	34, 73
unpacking checklist .....	35
unpacking precautions.....	34, 73
USB.....	60, 61, 88, 89, 124, 125
cable	
dual port .....	88
four port.....	89
cable .....	88, 89
cable connection.....	88
connectors .....	88
controller.....	19
devices .....	61



## KINO-690AM2 Mini-ITX Motherboard

external USB device connection .....	95
port .....	61
USB 1.1 .....	61
USB 2.0 .....	61
USB 1.1 .....	61
USB 2.0 .....	61, 124
USB 2.0 port .....	67
USB cable	
dual port .....	88
four port .....	89
USB connector, internal .....	4, 61
location and pinouts .....	61

USB device connection.....	95
dual connector .....	95

**V**

VGA .....	96
VGA monitor.....	96
connection .....	96

**W**

warranty validation .....	72
---------------------------	----